


Part No.	Reference No.	Quantity	Description
75008736#UHPBUP1~S	*		MODEL NUMBER DESCRIPTION
UHPA1001_UHPBUP1_121962~P	*		UHPBUP1 PARTS LIST
75000092#UHPBUP1~S	*		UNIT PARTS
UHPA1003#UHPBUP1~S	*		WIRE GUARDS

NO GRAPHIC AVAILABLE


75013702

REV
A

**NO
GRAPHIC
AVAILABLE**

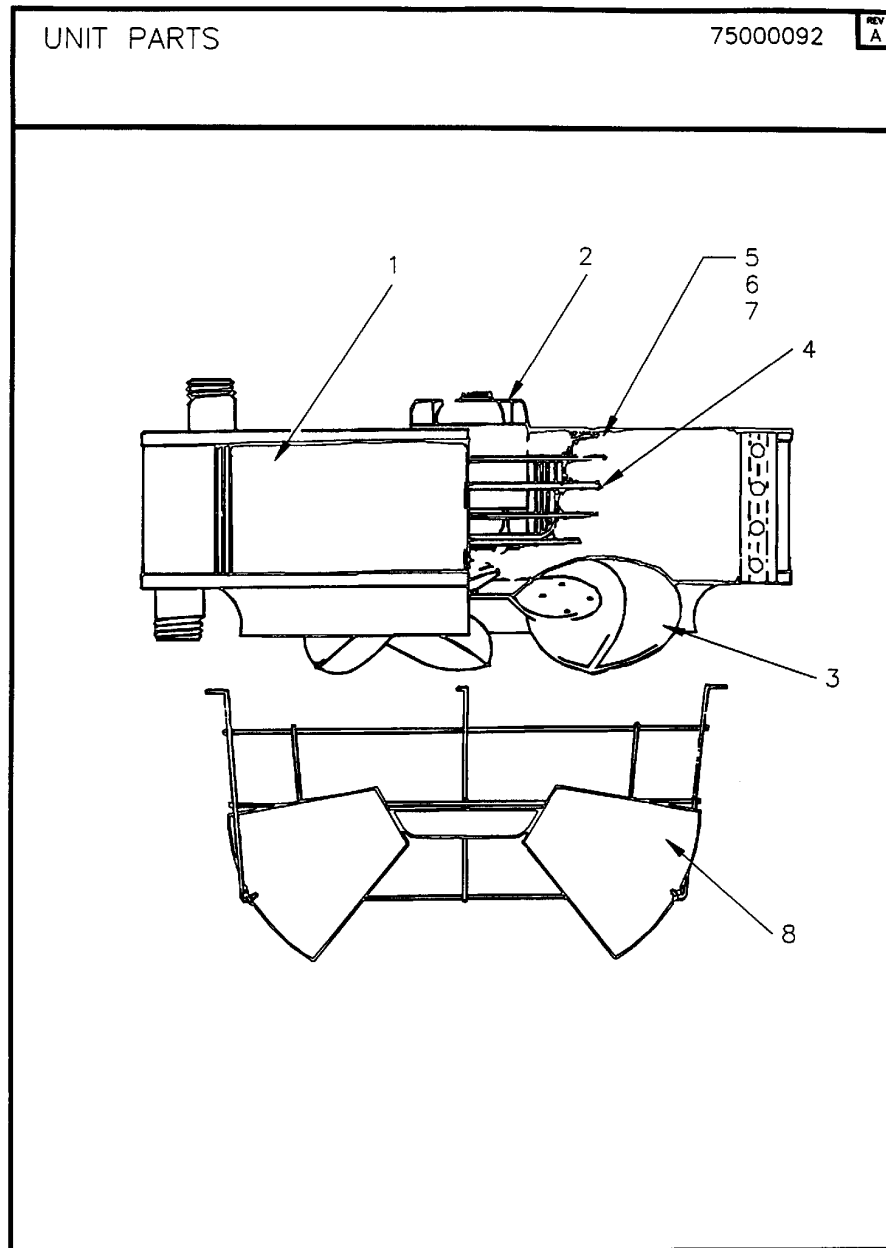

Part No.	Reference No.	Quantity	Description
75000092_UHPBUP1_221294~P	*		UNIT PARTS

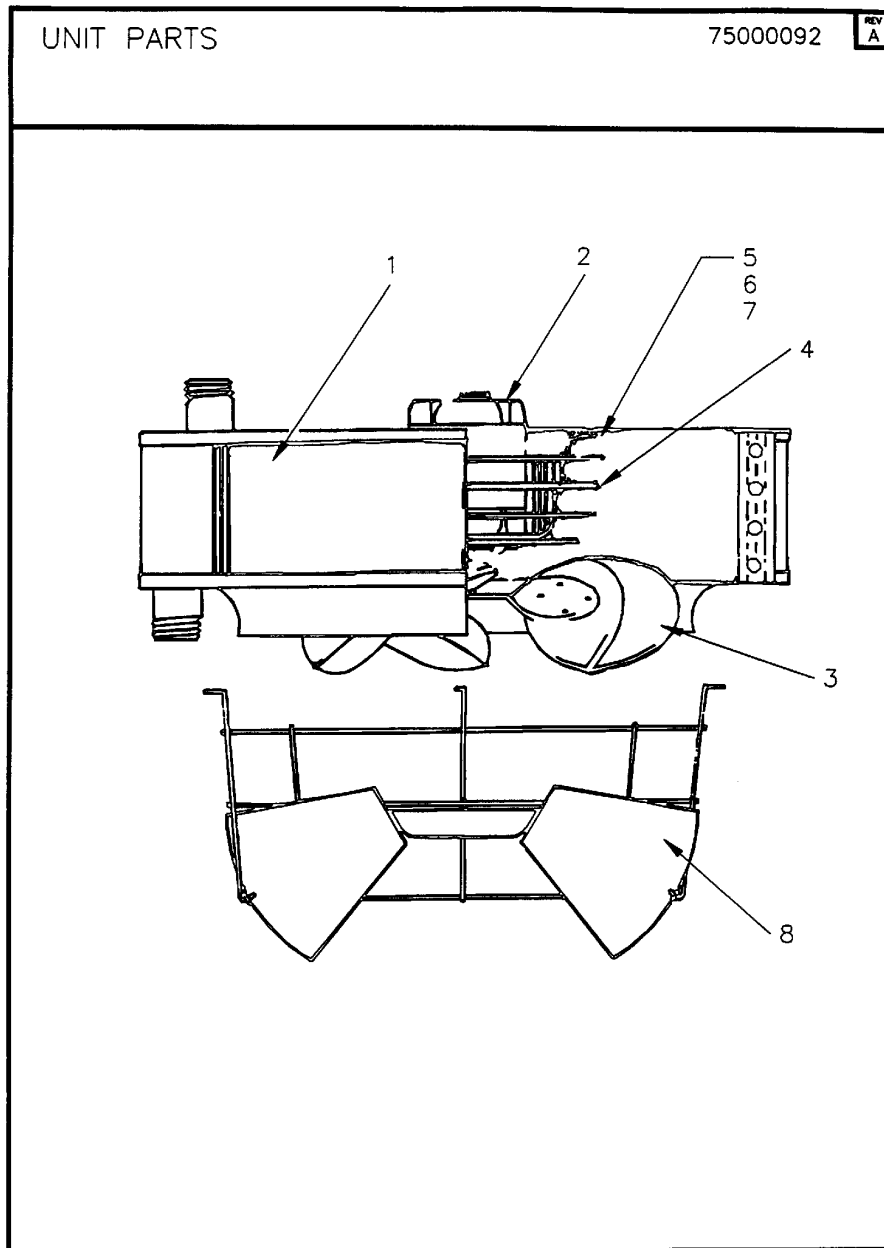

Part No.	Reference No.	Quantity	Description
ANG00060	*	1	ANGLE;BASE MOUNT
CNT00642	*	1	CONTROL; VARIABLE SPEED MOTOR, SOLID STATE
PAI00087	*	0	PAINT; AEROSOL, LT.GRAY (SHIPPING UOM 12 OZ HAZ)
SWT00169	*	1	SWITCH;STARTER, TOGGLE, SPST, NEMA 1, 110-220V, MANUAL NEMA/WITHOUT OVERLOAD
THT02339	*	1	THERMOSTAT; LIGHT DUTY COMBINATION THERMOSTAT AND SUBBASE,
COL00783	1	1	COIL, ASSEMBLY
MOT01503	2	1	MOTOR; 1/8 HP, 115/60/1 1070 RPM, ENCL, SLEEVE
FAN00443	3	1	FAN, 3 BLADE, ALUM., 16.75 DIA, 23 DEG, .50 BORE, CW
MNT00112	4	1	MOUNT;MOTOR
MNT00250	4	1	MOUNT;BASE
BUS00167	5	1	BUSHING, ISOLATOR, 5/16OD X 17/64ID, STL
WAS00379	6	1	WASHER; ISOLATOR, .56 ID X 1.00 OD, .25 THICK
MNT00316	7	1	MOUNT, MOTOR ISOLATOR
DIF00028	8	1	DIFFUSER; LOUVER CONE

MODEL NUMBER DESCRIPTION		75008736	REV A
UHPB, UHSB			
Digit 1,2,3 - Product Type UHP, UHS		Digit 11 - Tube Material A = Copper* B = Steel(P Only)	
Digit 4 - Development Sequence B		Digit 12 - Fan Guard 1 - DSHA Fan Guard 2 - Std Fan Guard (3 phase or Expl. Proof mtrs. only) 3 - Std Fan Guard (Unit Cap. 240-360)	
Digit 5,6,7 - Capacity/Coil Type Hot Water Only(Coil Type A "serpentine") A08 - 8,030 BTU A18 - 18,400 BTU/HR A25 - 24,800 BTU/HR A36 - 35,900 BTU/HR		Digit 13 - Special Coating 0 = No Special Coating A = Phenolic Coating(Baked) B = Epoxy C = Epoxy Phenolic	
018 18,000 BTU/HR 132 132,000 BTU/HR 024 24,000 BTU/HR 144 144,000 BTU/HR 036 36,000 BTU/HR 156 156,000 BTU/HR 048 48,000 BTU/HR 180 180,000 BTU/HR 060 60,000 BTU/HR 204 204,000 BTU/HR 072 72,000 BTU/HR 240 240,000 BTU/HR 084 84,000 BTU/HR 280 280,000 BTU/HR 096 96,000 BTU/HR 300 300,000 BTU/HR 108 108,000 BTU/HR 360 360,000 BTU/HR 120 120,000 BTU/HR		Digit 14 - Disconnect Switch 0 = None 1 = Disconnect Switch	
Digit 5,6,7 - Capacity Steam or Hot Water		Digit 15 - Thermostats(Line Voltage) 0 = None A = Light Duty TSTAT w/subbase Line Volts 8 Amps B = Heavy Duty TSTAT w/subbase & locking cover Line Volts 16 Amps+A32	
042 42,000 BTU/HR 252 252,000 BTU/HR 064 64,000 BTU/HR 280 280,000 BTU/HR 080 80,000 BTU/HR 336 336,000 BTU/HR 102 102,000 BTU/HR 384 384,000 BTU/HR 122 122,000 BTU/HR 500 500,000 BTU/HR 146 146,000 BTU/HR 600 600,000 BTU/HR 166 166,000 BTU/HR 720 720,000 BTU/HR 202 202,000 BTU/HR		Digit 16 - Thermostat Cover 0 = None A = Locking Thermostat Cover	
Digit 8 - Voltage 1 = 115/1/60 3 = 230/1/60 (115 V MTR/W/TRANSF) 4 = 208/3/60 5 = 230/3/60 5 = 460/3/60 7 = 575/60/3 (Totally Enclosed(P only)		Digit 17 - Manual Starter 0 = None A= Manual Starter	
Digit 9 - Motor Type T = Totally Enclosed E = Explosion Proof		Digit 18 - Steam and Hot Water Control 0 = None 1 = Strap on Hot Water Control 2 = Steam Pressure Control(open on rise in pressure) 3 = Steam Pressure Control(closed on rise in pressure) 4 = 5.0 Amp Speed Control Switch (Capacities 18 -120 only)	
Digit 10 - Design Sequence A		Digit 19 - Vertical Louver 0 = None A - Vertical Louver B - Fin Diffuser(p Only) C - Fin Diffuser w/coating (ponly)	

Part No.	Reference No.	Quantity	Description
75008736_UHPBUP1_121966~P	*		MODEL NUMBER DESCRIPTION PARTS LIST

MODEL NUMBER DESCRIPTION		75008736	REV A
UHPB, UHSB			
Digit 1,2,3 - Product Type UHP, UHS		Digit 11 - Tube Material A = Copper* B = Steel(P Only)	
Digit 4 - Development Sequence B		Digit 12 - Fan Guard 1 - DSHA Fan Guard 2 - Std Fan Guard (3 phase or Expl. Proof mtrs. only) 3 - Std Fan Guard (Unit Cap. 240-360)	
Digit 5,6,7 - Capacity/Coil Type Hot Water Only(Coil Type A "serpentine") A08 - 8,030 BTU A18 - 18,400 BTU/HR A25 - 24,800 BTU/HR A36 - 35,900 BTU/HR		Digit 13 - Special Coating 0 = No Special Coating A = Phenolic Coating(Baked) B = Epoxy C = Epoxy Phenolic	
018 18,000 BTU/HR 132 132,000 BTU/HR 024 24,000 BTU/HR 144 144,000 BTU/HR 036 36,000 BTU/HR 156 156,000 BTU/HR 048 48,000 BTU/HR 180 180,000 BTU/HR 060 60,000 BTU/HR 204 204,000 BTU/HR 072 72,000 BTU/HR 240 240,000 BTU/HR 084 84,000 BTU/HR 280 280,000 BTU/HR 096 96,000 BTU/HR 300 300,000 BTU/HR 108 108,000 BTU/HR 360 360,000 BTU/HR 120 120,000 BTU/HR		Digit 14 - Disconnect Switch 0 = None 1 = Disconnect Switch	
Digit 5,6,7 - Capacity Steam or Hot Water		Digit 15 - Thermostats(Line Voltage) 0 = None A = Light Duty TSTAT w/subbase Line Volts 8 Amps B = Heavy Duty TSTAT w/subbase & locking cover Line Volts 16 Amps+A32	
042 42,000 BTU/HR 252 252,000 BTU/HR 064 64,000 BTU/HR 280 280,000 BTU/HR 080 80,000 BTU/HR 336 336,000 BTU/HR 102 102,000 BTU/HR 384 384,000 BTU/HR 122 122,000 BTU/HR 500 500,000 BTU/HR 146 146,000 BTU/HR 600 600,000 BTU/HR 166 166,000 BTU/HR 720 720,000 BTU/HR 202 202,000 BTU/HR		Digit 16 - Thermostat Cover 0 = None A = Locking Thermostat Cover	
Digit 8 - Voltage 1 = 115/1/60 3 = 230/1/60 (115 V MTR/W/TRANSF) 4 = 208/3/60 5 = 230/3/60 5 = 460/3/60 7 = 575/60/3 (Totally Enclosed(P only)		Digit 17 - Manual Starter 0 = None A= Manual Starter	
Digit 9 - Motor Type T = Totally Enclosed E = Explosion Proof		Digit 18 - Steam and Hot Water Control 0 = None 1 = Strap on Hot Water Control 2 = Steam Pressure Control(open on rise in pressure) 3 = Steam Pressure Control(closed on rise in pressure) 4 = 5.0 Amp Speed Control Switch (Capacities 18 -120 only)	
Digit 10 - Design Sequence A		Digit 19 - Vertical Louver 0 = None A - Vertical Louver B - Fin Diffuser(p Only) C - Fin Diffuser w/coating (ponly)	

Part No.	Reference No.	Quantity	Description
UHPA1003_UHPBUP1_221295-P	*		WIRE GUARDS PARTS LIST

NO GRAPHIC AVAILABLE

75013702

REV
A

**NO
GRAPHIC
AVAILABLE**

WIRE GUARDS PARTS LIST

Parts List Number :UHPA1001#UHPBUP1

Model Number :UHPB1021TAA101A0060

Part No.	Reference No.	Quantity	Description
GRD01167	3	1	GUARD; FAN, OSHA