
Permanent Split Capacitor Condenser Fan 5.6" Diameter, Totally Enclosed Air Over (TEAO)

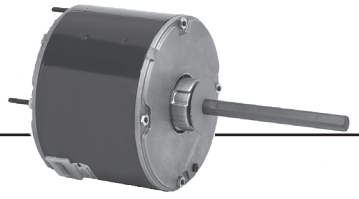


APPLICATIONS:

Residential and commercial condenser unit fan motors to meet manufacturer's requirements.

FEATURES:

- 140°F (60°C) Ambient Design
- Sleeve Bearings Have All Angle Thrust System
- Class B Insulation
- Suitable for Use With 370V Capacitors
- Extended Studs
- Hubless Lead End
- Drain Holes Both Ends
- Reversible Rotation
- Automatic Reset Thermal Overload Protector
- Continuous Duty

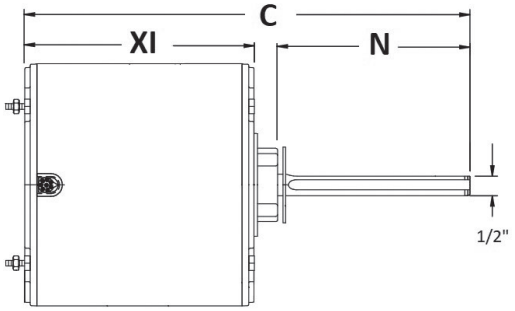

EZ-FIT® Multi-Horsepower

HP	RPM	Voltage	Catalog Number	List	Bearings	Cap. MFD	Amps	Shaft N	Shell XI	Total C	Ship Wt. (lbs)	Notes
1/2 - 1/5	1075	208-230	3324	$128	BALL	15	2.6-1.7	4.5	10.8	10.8	15.72	H43
1/3 - 1/5	825	208-230	1875	$186	BALL	7.5	2.4-1.4	6.0	4.5	11.6	16	H25
1/3 - 1/6	1075	208-230	3323	$137	BALL	7.5	2.0	5.0	4.3	9.3	13	H25
1/4 - 1/8	825	208-230	1874	$164	SAB	5	2.0	6.0	4.4	10.9	11	H25


Stud Mount

HP	RPM	Voltage	Catalog Number	List	Bearings	Cap. MFD	Amps	Shaft N	Shell XI	Total C	Ship Wt. (lbs)	Notes
1/10	825	208-230	1871	$202	BALL	3	1.0	6.0	3.8	10.4	12.44	
1/8	1650	200-230	4895	$230	BALL	4	0.8	2.0	3.6	5.6	7.28	TR
	825	200-230	1902	$222	BALL	5	0.74	1.9	4.4	6.2	10.75	H16,TR
	825	208-230	5456	$226	SAB	5	1.2	3.8	4.1	7.8	10.2	H25
	825	208-230	1872	$203	SAB	5	0.78	6.0	4.1	10.6	11.88	H25
1/6	825 / 2	208-230	8673	$289	SAB	5	1.0	6.0	4.4	10.9	17	
	1075	208-230	1859	$137	BALL	5	1.0	4.5	4.0	9.0	9	H25
	825	208-230	5457	$239	SAB	7.5	1.2	3.8	4.6	8.3	12.3	H25
	825	208-230	1873	$164	BALL	5	1.0	6,0	3.5	10.6	11	H25
1/5	1075	208-230	5454	$183	SAB	3	1.7	3.7	3.8	8.1	10.38	H25
	1075	208-230	5450	$227	SAB	3	1.3	3.7	3.8	7.5	10.4	H16,H25
	825	200-230	1903	$237	BALL	7.5	0.93	2.3	5.1	7.3	15	H16,TR
1/4	1625	208-230	1890	$312	SAB	5	1.4	5.0	4.3	9.9	13.17	
	1075	208-230	1860	$142	SAB	5	1.5	4.5	4.6	9.6	11	H25
	1075	208-230	1876	$146	BALL	5	1.5	4.5	4.6	9.6	11.43	
	1075	460	3736	$141	BALL	7.5	0.8	6.0	4.6	11.1	13.72	

Note 71 1.5" Stud Ext., Shaft End only, 104°F (40°C) Ambient, Double Flats
Note 72 Includes 4 Holes in Shell for Rheem Mount
Note H16 CCWLE rotation only
Note H25 Includes 4 Holes With Screws In Shell For RHEEM®† Mount
Note H43 Side Shell & Lead End Mounting Screws Included In Carton
Note TR OEM to Trane

Permanent Split Capacitor Condenser Fan
5.6" Diameter, Totally Enclosed Air Over (TEAO)

(continued)

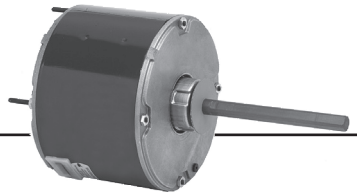

Stud Mount, Without Capacitor, 60°C, All Angle Mount

HP	RPM	Voltage	Catalog Number	List	Bearings	Cap. MFD	Amps	Shaft N	Shell XI	Total C	Ship Wt. (lbs)	Notes
1/4	850	208-230	1743	$226	SAB	5	1.5	2.75	4.6	7.3	17	H20,H30,YK
	825	208-230	8674	$327	SAB	7.5	1.5	6.0	4.6	11.1	14.5	
	825	460	1880	$343	BALL	5	1.0	6.0	5.1	11.6	14.81	
	825	575	1276	$346	BALL	5	0.7	5.0	4.9	10.4	10	
1/3	825 / 2	208-230	8675	$342	SAB	7.5	2.0	6.0	5.4	11.9	18.3	
	1625	208-230	1891	$356	BALL	7.5	1.6	5.0	4.6	10.1	10.59	
	1075	208-230	5455	$195	SAB	5	2.0	3.7	4.1	8.3	11.96	H25
	1075	208-230	1877	$156	BALL	7.5	2.0	4.5	4.6	10.1	14.24	
	1075	208-230	3322	$156	BALL	10	1.8-1.3	5.0	4.6	9.6	11.48	H25
	1075	208-230	8670	$300	SAB	7.5	2.2	6.0	4.8	11.4	16.4	71
	1075	208-230	1861	$152	SAB	7.5	2.0	4.5	5.0	10.1	14	H25
	1075	460	3737	$269	BALL	7.5	1.3	6.0	5.4	11.9	16.53	
	825	460	1881	$450	BALL	7.5	1.0	6.0	5.6	12.1	17.86	
	825	575	1296	$453	BALL	7.5	1.1	5.0	5.3	10.9	16.77	
1/2	1625	208-230	1892	$434	SAB	5	3.0	5.0	5.1	10.6	16	
	1625	575	1198	$304	BALL	7.5	1.0	6.5	5.3	11.9	16.75	
	1075	208-230	1878	$172	BALL	10	3.1	5.5	5.3	10.3	18.4	
	1075	208-230	1862	$168	BALL	10	3.1	5.5	5.3	10.3	17	H25
	1075	208-230	8671	$347	BALL	10	2.9	6.0	5.8	12.4	10	71
	1075	460	3738	$277	BALL	10	1.5	6.0	5.9	12.4	20	
	1075	575	1098	$377	BALL	10	1.0	5.0	6.4	11.4	18.1	
	825	208-230	1870	$237	BALL	12.5	2.8	6.0	5.8	12.4	21.75	
	825	460	1882	$520	BALL	10	1.55	6.0	6.3	12.9	19.81	
3/4	1075	208-230	1879	$211	BALL	10	4.7	6.0	5.8	12.4	21.39	
	1075	208-230	1868	$153	BALL	10	4.7	5.0	5.8	11.4	21	
	1075	460	3742	$319	BALL	10	2.0	6.0	6.3	12.9	21	
	1060	575	1099	$434	BALL	12.5	1.25	5.0	6.4	11.4	18.1	
1	1075	460	1417	$832	BALL	25	2.5	6.0	6.9	13.4	18.5	H9
	1075	460	1409	$242	BALL	25	2.5	6.0	6.8	13.4	25.24	

Note 71 1.5" Stud Ext., Shaft End only, 104°F (40°C) Ambient, Double Flats
Note H9 5/8" Shaft
Note H20 CWLE rotation only
Note H25 Includes 4 Holes With Screws In Shell For RHEEM®† Mount
Note H30 Includes Special Cord And Plug
Note YK OEM to York