
Permanent Split Capacitor Unit Heater Fan
5.6" & 6.3" Diameter, Totally Enclosed Air Over

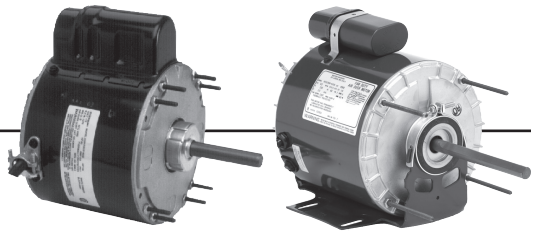


APPLICATIONS:

Designed to meet manufacturer's requirements for use on unit heaters.

FEATURES:

- Continuous Duty, Air Over
- Reversible Motors Are Easily Reversed With Quick Connects
- 2-1/2" Diameter Hub Rings When Furnished
- Automatic Reset Thermal Overload Protector
- Green Ground Lead
- 48 Frame Has 8-32 NF-2A Thread; 56 Frame Has 10-32 NF-2A Thread
- 370V Capacitor Is Furnished
- Extended Mounting Studs

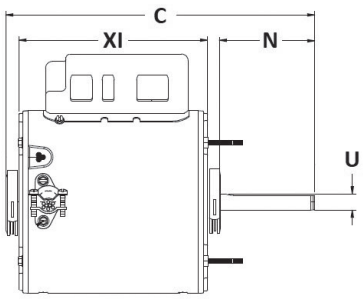

5.6" Dia., Stud Mount

HP	RPM	Voltage	Catalog Number	List	Amps	Shaft N	Shaft U	Shell XI	Total C	Ship Wt. (lbs)
1/6	1075 RPM	115	9034	$277	2.14	4.0	0.5	4.6	9.6	11
1/4	1075 RPM	115	9035	$302	2.98	4.0	0.5	4 .6	9.6	16
1/3	1075 RPM	115	9036	$307	4.09	4.0	0.5	4 .6	9.6	15.11

6.3" Dia., Resilient Base

HP	RPM	Voltage	Catalog Number	List	Amps	Shaft N	Shaft U	Shell XI	Total C	Ship Wt. (lbs)
1/4	1725 RPM	115	6326	$333	4.57	2.0	0.5	6.8	9.9	18.4
1/2	1075 / 2 SPD	230	1810	$546	2.52	4.9	0.5	6.9	12.9	27.1

5.6" Dia., Resilient Base

HP	RPM	Voltage	Catalog Number	List	Amps	Shaft N	Shaft U	Shell XI	Total C	Ship Wt. (lbs)
1/6	1625 RPM	115	1385	$345	1.92	3.3	0.5	5.8	9.7	11.49
	1075 RPM	115	1386	$304	2.28	3.3	0.5	5.8	9.7	12.32
1/4	1725 RPM	115/230	1255	$237	2.39	4.5	0.5	7.4	12.9	15.8
	1140 RPM	115/230	1191	$243	-	4.5	0.5	6.9	12.4	15.33
	1075 RPM	115	1384	$324	2.98	3.3	0.5	5.8	9.7	15.05
1/3	1140 RPM	115/208 - 230	1900	$310	3.6	4.5	0.5	6.4	11.9	16.8
	1075 RPM	115	1388	$374	4.4	3.3	0.5	5.8	9.7	16.41
1/2	1725 RPM	115/230	1899	$337	6.65	4.5	0.5	7.4	12.9	17
	1140 RPM	115/230	1195	$343	6.35	4.5	0.5	7.4	12.9	19.43