


NOTE:
START CAPACITOR WITH 300 OHM RESISTOR REQUIRED

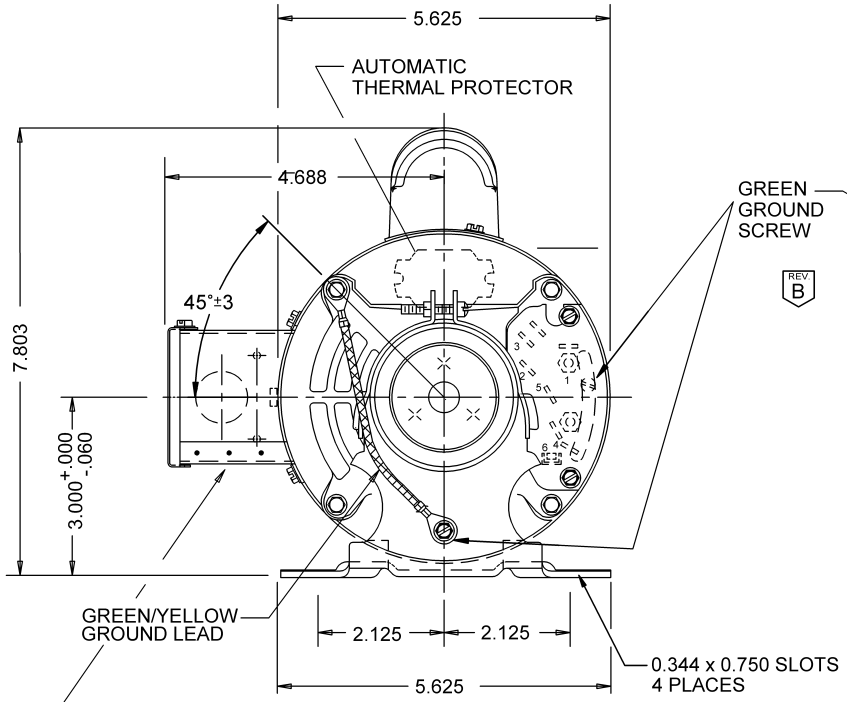

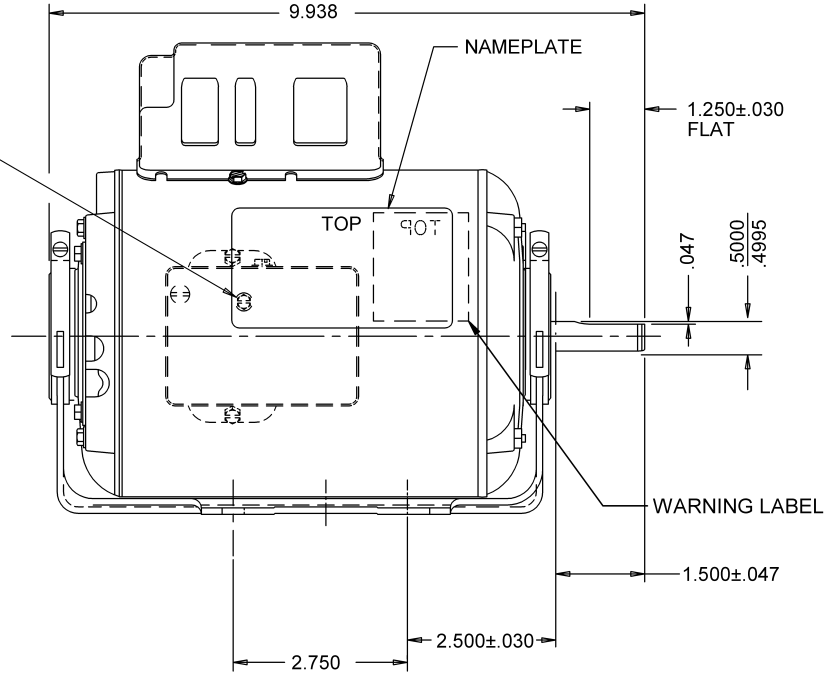

7 LEADS #18, .031 THICK INSUL
TO EXTEND PAST SHELL
YELLOW= 6.0±1.00
LABELED P1, P2, T2, T3, T4, T5 & T8
COILED IN CONDUIT BOX

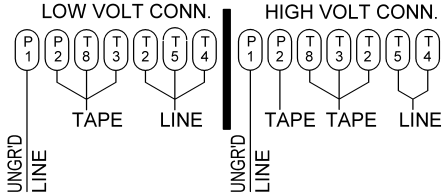

CCW ROTATION SWITCH END TO REVERSE
ROTATION INTERCHANGE LEADS T5 & T8

MODEL	REF	CUSTOMER	HP	VOLTS	AMPS	HZ	RPM	ROTATION	CUSTOMER PN
C55JXJKM-4527		WHOLESALE - HAC	1/2	115/230	8.4/4.2	60	1725	CCW SWITCH END, REV.	481479

SHEET NUMBER	REV
1 OF 1	B

REVISION RECORD FOR: **D2329-00**

ADDED ARROW ON GREEN GROUND SCREW

REVISION DATE: 03-DEC-14

INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION

NIDEC MOTOR CORPORATION

ALL DIMENSIONS ARE FOR REFERENCE ONLY UNLESS TOLERANCE IS GIVEN

ISSUED BY	REVIEWED BY	ENGINEER APPROVED
C.ALMAGUER	B.GAITAN	B. GAITAN

TITLE	CODE	ITEM NO.	SIZE
ASSEMBLED VIEW	V01	792106	B

NIDEC MOTOR CORPORATION 03-Dec-14