
Permanent Split Capacitor Condenser Fan 5.6" Diameter, Open Drip Proof, Air Over

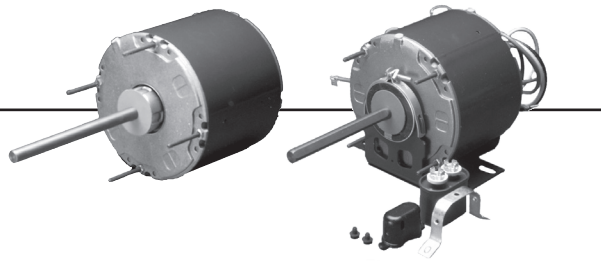


APPLICATIONS:

Designed to meet manufacturer's requirements for condenser cooling fans.

FEATURES:

- High Efficiency ECONOMIZER® Rated (except as noted)
- Capacitor Mounting Holes In Frame Band
- Designed for use with 370V Capacitors
- 140°F (60°C) Ambient Design
- Enclosed Endshield at Shaft End
- Extended Studs are 8-32 UNC Thread
- Class B Insulation
- Reversible Rotation (Unless otherwise noted)
- Automatic Reset Thermal Overload Protector
- Continuous Duty
- Bearings have All Angle Thrust System
- Green Ground Lead



Stud Mount, Shaft Up or Horizontal, Without Capacitor

HP	RPM/ Spds.	Voltage	Catalog Number	List	Mounting	Amps	Motor Shaft Rotation	Shaft N	Base XD	Shell XI	Total C	Ship Wt. (lbs)	Notes
1/4	1110	208-230	8230	$171	STUD	1.6	REV	3.3		3.8	7.1	10.13	72;H42
	1075	208-230	3851	$141	HUB/STUD	1.7	REV	5.0	4.4	4.4	9.9	10	62
	825	230	8666	$327	STUD	1.9	REV	6.0		4.6	11.56	14.4	
1/3	1075	208-230	6880	$153	HUB/STUD	2.5-2.2	REV	5.0	4.9	4.3	10.4	12.2063	62
	1075	460	1060		BAND	1.3	CCWLE	3.5		5.0	8.6	15.7	
	825	208-230	7040	$327	HUB/STUD	2.7	REV	6.0	5.9	5.3	12.4	22.6	H55
	825	230	8667	$342	STUD	2.0	REV	6.0		5.1	11.1	18.29	
	825	230	5345	$361	HUB/STUD	3.0	REV	6.0	6.4	5.8	12.9	16.2383	H55
1/2	1075	208-230	3852	$164	HUB/STUD	3.1	REV	5.0	5.4	4.8	10.9	16.08	62
	825	208-230	7041	$484	HUB/STUD	2.8	REV	6.0	6.6	6.1	13.2	23.33	H55
3/4	1075	208-230	3097	$200	HUB/STUD	4.7	REV	5.0	6.6	5.6	11.7	20.16	
	1075	230	8665	$276	STUD	4.4	REV	6.0		5.3	12.4	19.5	
	1075	460	1061		BAND	3.0	CCWLE	4.52		6.5	11.1	24.33	
1	1100	460	1413	$648	STUD	3.12	REV	6.0		6.1	12.6	20.38	
	1075	208-230	1888	$484	HUB/STUD	5.2	REV	6.0	6.8	6.3	13.4	24.02	62

Resilient Base (3.0" Height), Shaft Up or Horizontal, With Capacitor

HP	RPM/ Spds.	Voltage	Catalog Number	List	Amps	Motor Shaft Rotation	Shaft N	Shell XI	Total C	Ship Wt. (lbs)	Notes
1/4	1100	208-230	4671	$270	1.3	REV	9.0	3.8	13.9	10.04	H54
	1075	230	3846	$347	1.9	REV	5.0	4.2	10.4	14.3	62
1/3	1625	230	4961	$486	1.8	REV	5.0	4.6	10.4	15.9	62
	1625	230	4811	$350	1.8	REV	5.0	4.6	10.7	15.8	
	1075	208-230	6986	$171	3.5	CWLE	4.0	4.6	9.6	14.8575	HC
	1075	230	4960	$399	2.2	REV	5.0	4.8	10.9	16.67	
	1075	230	3847	$364	2.2	REV	5.0	4.8	10.9	16.6	
1/2	1075	230	3848	$378	3.1	REV	5.0	5.9	12	13	
	1075	230	7025	$472	3.1	REV	4.9	6.0	11.9	20	

Note 62 Not ECONOMIZER®
Note 72 Includes 4 Holes in Shell for Rheem Mount
Note H42 Shaft-end Ventilated, Lead-end Enclosed, Shaft-down Mounting Only
Note H54 3.5" Shaft Height
Note H55 Hub Mount
Note HC OEM to Heatcraft