
EFFECTIVE: 06-JAN-26	DIMENSION PRINT WORLD MOTOR C-FACE WITH VERTICAL LIFTING AND CANOPY CAP FRAME: 360TC BASIC TYPE: TCEF	PRINT: 08-1389
SUPERSEDES: 22-OCT-25		SHEET: 1 OF 1

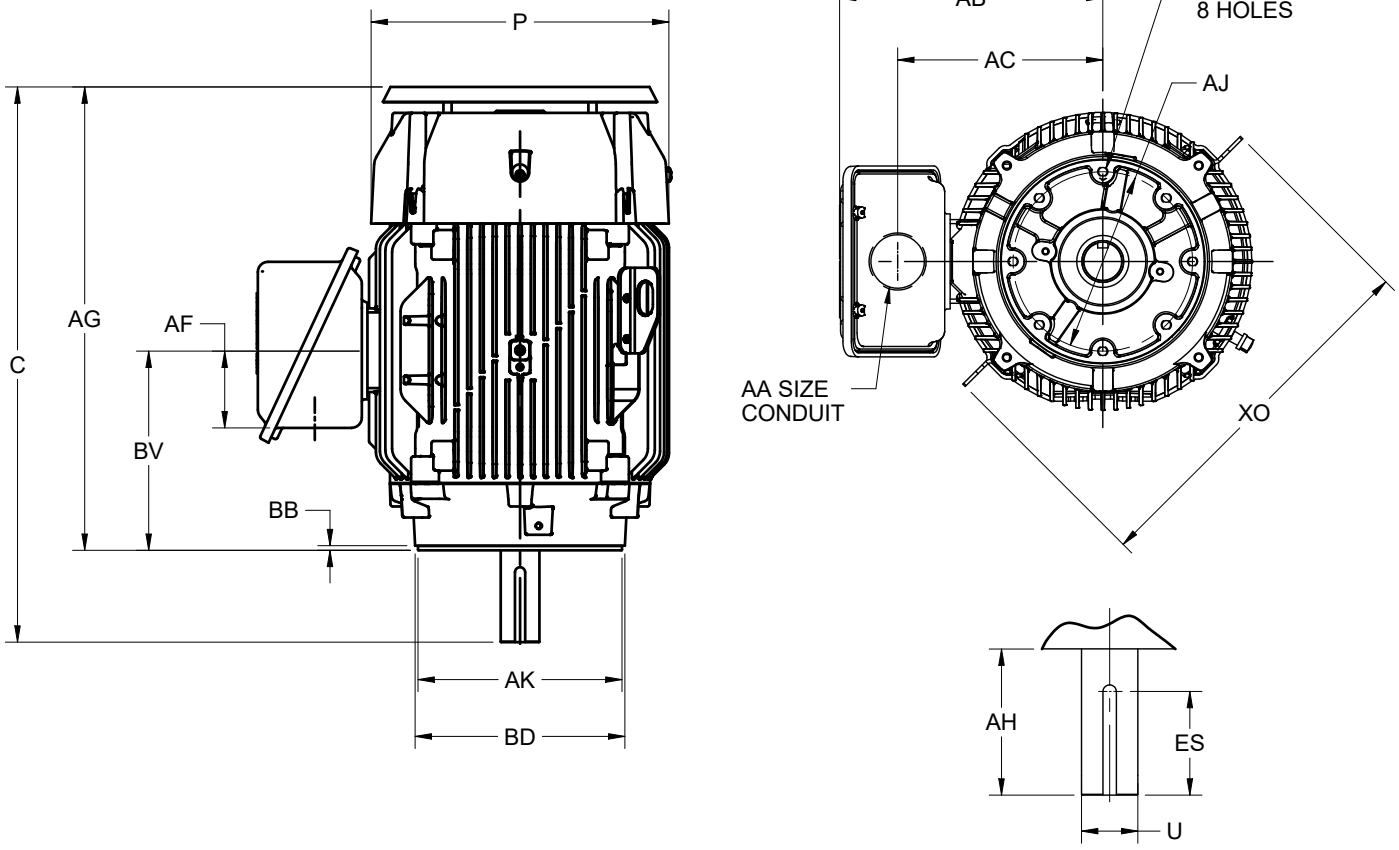

ALL DIMENSIONS ARE IN INCHES AND MILLIMETERS

	UNITS	C	P [5]	U -.001	AA	AB	AC	AF	AG	AH	AJ
	IN	34.00	18.25	2.375	3 NPT	16.17	12.57	4.75	28.38	5.63	11.000
	MM	864	464	60.32		435	319	121	721	143	279.40

	UNITS	AK -.003	BB MIN	BD MAX	BF [2]	BV	ES MIN	SQ KEY	XO
	IN	12.500	.25	12.85	5/8-11X.94	12.25	4.18	.625	22.75
	MM	317.50	6	326		311	106	16	578

TOLERANCES	
FACE RUNOUT	.004 T.I.R.
PERMISSIBLE ECCENTRICITY OF MOUNTING RABBET	.004 T.I.R.
PERMISSIBLE SHAFT RUNOUT	.002 T.I.R.

1. ALL ROUGH CASTING DIMENSIONS MAY VARY BY .25" DUE TO CASTING AND/OR FABRICATION VARIATIONS.
2. TAP SIZE AND BOLT PENETRATION ALLOWANCE.
3. ALL TAPPED HOLES ARE UNIFIED NATIONAL COARSE, RIGHT HAND THREAD.
4. CONDUIT OPENING MAY BE LOCATED IN STEPS OF 90 DEGREES,
5. LARGEST MOTOR WIDTH.
6. TOLERANCES SHOWN ARE IN INCHES ONLY.
7. THIS UNIT MAY HAVE HORIZONTAL LIFTING, VERTICAL LIFTING OR BOTH.

08-1389/-

Nidec Motor Corporation
St. Louis, Missouri

INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION

ISSUED BY L. ARROYO
APPROVED BY G. MARTINEZ

IHP_DP_NMCA (MAR-2011) SOLIDEDGE