
EFFECTIVE: 23-MAR-23	DIMENSION PRINT OPEN DRIP PROOF-WITH WORLD MOTOR O/B FRAME: 447T, TS BASIC TYPE: R	PRINT: 07-3557
SUPERSEDES: 13-JAN-23		SHEET: 1 OF 1

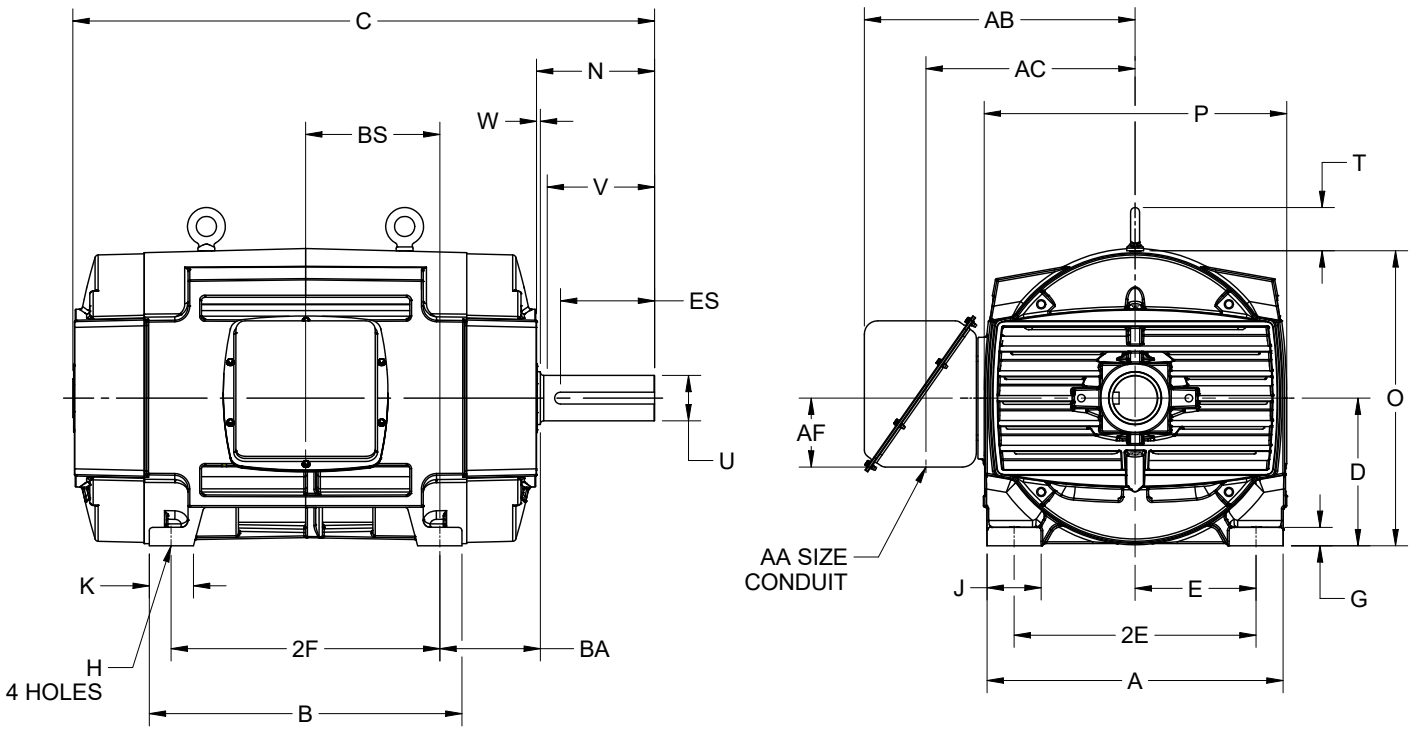

ALL DIMENSIONS ARE IN INCHES AND MILLIMETERS

	UNITS	A	B	D -.06	E	2E ±.03	2F ±.03	G	H +.05	J	K	O
	IN	22.00	23.25	11.00	9.00	18.00	20.00	1.38	.81	4.00	3.25	22.06
	MM	559	591	279	229	457	508	35	21	102	83	560

	UNITS	P [2]	T	W	AA	AB	AC	AF	BA	BS
	IN	22.94	3.25	.25	3.00	20.15	15.57	5.13	7.50	10.00
	MM	583	83	6		512	395	130	191	254

	FRAME	UNITS	C	N	U -.001	V MIN	ES MIN	SQ KEY
	447T	IN	43.25	8.75	3.375	8.25	6.91	.875
		MM	1099	222	85.73	210	176	22.23
	447TS	IN	39.50	5.00	2.375	4.50	3.03	.625
		MM	1003	127	60.33	114	77	15.88

1. DIMENSIONS MAY VARY BY .25" DUE TO CASTING AND/OR FABRICATION VARIATIONS.
2. LARGEST MOTOR WIDTH.
3. CONDUIT BOX MAY BE LOCATED ON EITHER SIDE AND CONDUIT OPENING MAY BE LOCATED IN STEPS OF 90 DEGREES REGARDLESS OF LOCATION. STANDARD AS SHOW WITH CONDUIT OPENING DOWN.

Nidec Motor Corporation
St. Louis, Missouri

INFORMATION DISCLOSED ON THIS DOCUMENT
IS CONSIDERED PROPRIETARY AND SHALL NOT BE
REPRODUCED OR DISCLOSED WITHOUT WRITTEN
CONSENT OF NIDEC MOTOR CORPORATION

ISSUED BY	D, CISNEROS
APPROVED BY	E. OVIEDO

IHP_DP_NMCA (MAR-2011) SOLIDEDGE