
EFFECTIVE: 18-MAR-25	**DIMENSION PRINT** **OPEN DRIP PROOF WITH WM OUTLET BOX** **FRAME: 320T, TS** **BASIC TYPE: D**	PRINT: 07-3544
SUPERSEDES: 25-FEB-25		SHEET: 1 OF 1

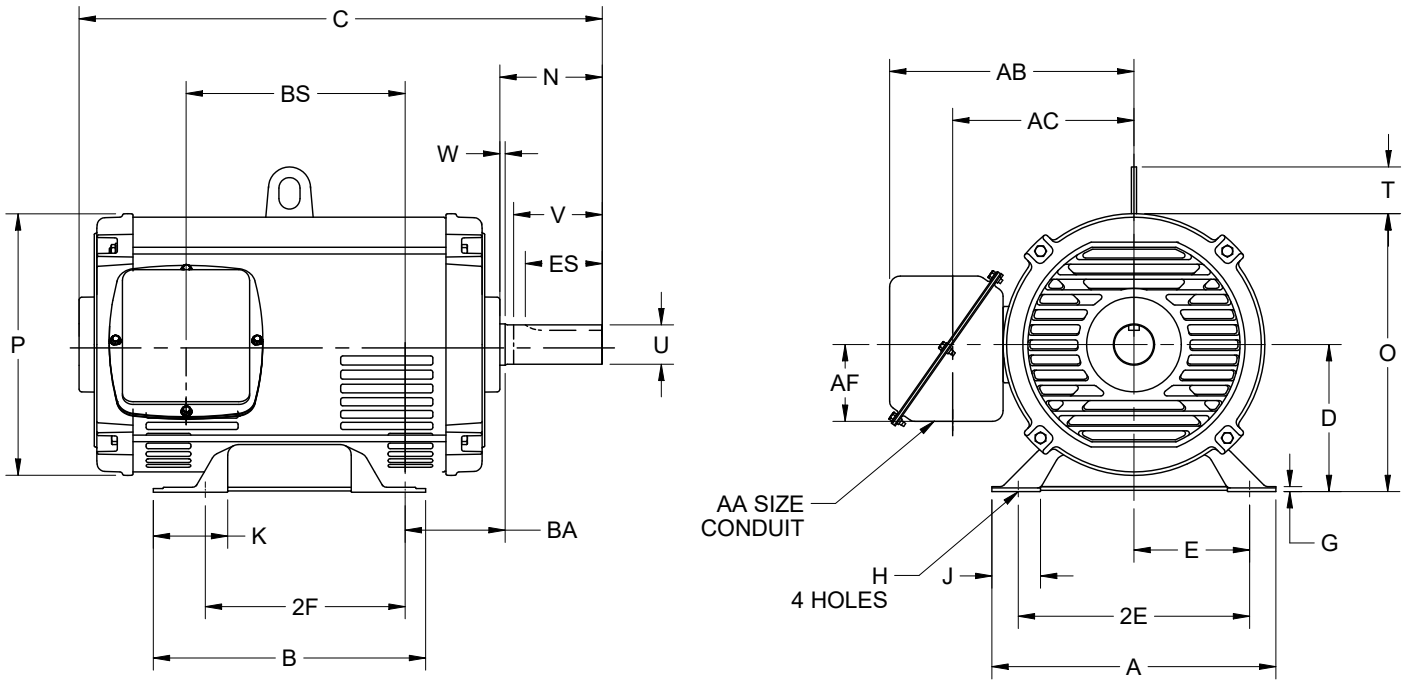

ALL DIMENSIONS ARE IN INCHES AND MILLIMETERS

	UNITS	A	B	D -.06	E	2E ±.03	G	H +.05	J	K	O
	IN	15.00	14.00	8.00	6.25	12.50	.25	.69	2.31	3.81	15.13
	MM	381	356	203	159	318	6	18	59	97	384

	UNITS	P^2	T	W	AA	AB	AC	AF	BA	BS	SQ KEY
	IN	14.19	2.19	.50	2.00	13.00	9.81	3.69	5.25	11.50	.500
	MM	360	56	13		330	249	94	133	292	12.70

	FRAME	UNITS	C	2F ±.03	N	U -.001	V MIN	ES MIN
	324T	IN	27.25	10.50	5.75	2.125	5.00	3.91
		MM	692	267	146	53.98	127	99
	324TS	IN	25.75	10.50	4.25	1.875	3.50	3.91
		MM	645	267	108	47.63	89	99
	326T	IN	27.25	12.00	5.75	2.125	5.00	3.91
		MM	692	305	146	53.98	127	99
	326TS	IN	25.75	12.00	4.25	1.875	3.50	2.06
		MM	645	305	108	47.63	89	52

1. DIMENSIONS MAY VARY BY .25" DUE TO CASTING AND/OR FABRICATION VARIATIONS.
2. LARGEST MOTOR WIDTH.
3. TOLERANCES SHOWN ARE IN INCHES ONLY.
4. STANDARD ASSEMBLY POSITION F-1 IS SHOWN. F-2 IS PROVIDED WHEN SPECIFIED. CONDUIT OPENINGS MAY BE LOCATED IN STEPS OF 90° REGARDLESS OF LOCATION. STANDARD AS SHOWN WITH CONDUIT OPENING DOWN.
5. FRAME REFERENCE: 16.750/324/326

Nidec Motor Corporation
St. Louis, Missouri

INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION

ISSUED BY	E.OVIEDO
APPROVED BY	J. RANGEL

IHP_DP_NMCA (MAR-2011) SOLIDEDGE