
EFFECTIVE: 13-JAN-23	DIMENSION PRINT TEFC-WITH WORLD MOTOR O/B FRAME: 400T BASIC TYPE: CT	PRINT: 07-3550
SUPERSEDES: NEW		SHEET: 1 OF 1

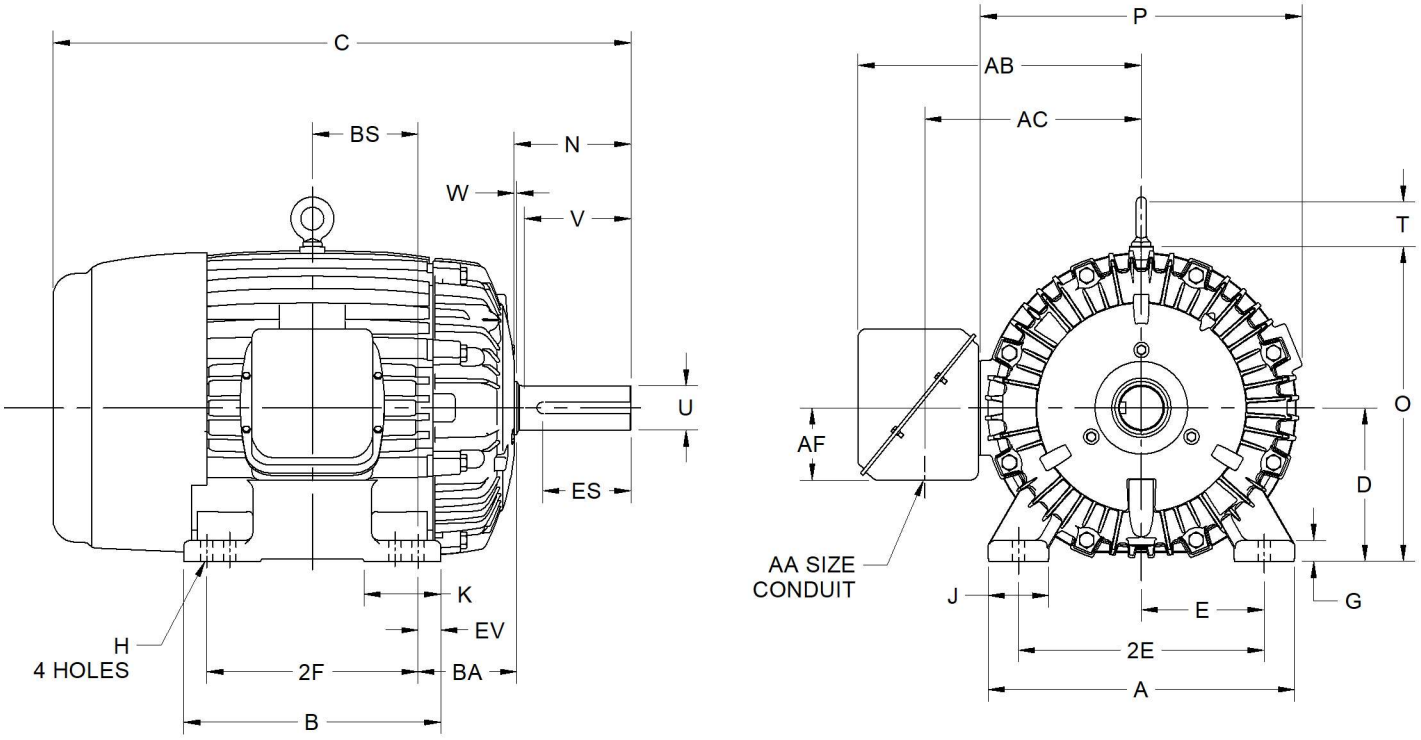

ALL DIMENSIONS ARE IN INCHES AND MILLIMETERS

	UNITS	A	B	C	D -.06	E	2E ±.03	G	H +.05	J	K	N	O
	IN	19.75	16.75	37.63	10.00	8.00	16.00	1.38	.81	3.75	5.00	7.63	20.50
	MM	502	425	956	254	203	406	35	21	95	127	194	521

	UNITS	P^2	T	U -.001	V MIN	W	AA	AB	AC	AF	BA	BS	ES MIN
	IN	20.97	3.22	2.875	7.00	.38	3.00	17.62	13.63	4.25	6.63	6.88	5.65
	MM	532	82	73.03	178	10		448	346	108	168	175	144

	UNITS	EV	SQ KEY
	IN	1.50	.750
	MM	38	19.05

	FRAME	UNITS	2F ±.03
	404T	IN	12.25
		MM	311
	405T	IN	13.75
		MM	349

1. ALL ROUGH DIMENSIONS MAY VARY BY .25" DUE TO CASTING AND/OR FABRICATION VARIATIONS.
2. LARGEST MOTOR WIDTH.
3. CONDUIT BOX MAY BE LOCATED ON EITHER SIDE. CONDUIT OPENINGS MAY BE LOCATED IN STEPS OF 90 DEGREES REGARDLESS OF LOCATION. STANDARD AS SHOWN WITH CONDUIT OPENING DOWN.
4. TOLERANCES SHOWN ARE IN INCHES ONLY.

07-3550/-

Nidec Motor Corporation
St. Louis, Missouri

INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION

US MOTORS

ISSUED BY
D. CISNEROS
APPROVED BY
E. OVIEDO

IHP_DP_NMCA (MAR-2011) SOLIDEDGE