

EFFECTIVE: 01-SEP-23	**DIMENSION PRINT** **VERTICALLY MOUNTED P FLANGE** **FRAME: 404, 405TP & TPA** **BASIC TYPE: TU**	PRINT: 09-3625
SUPERSEDES: 17-APR-23		SHEET: 1 OF 1

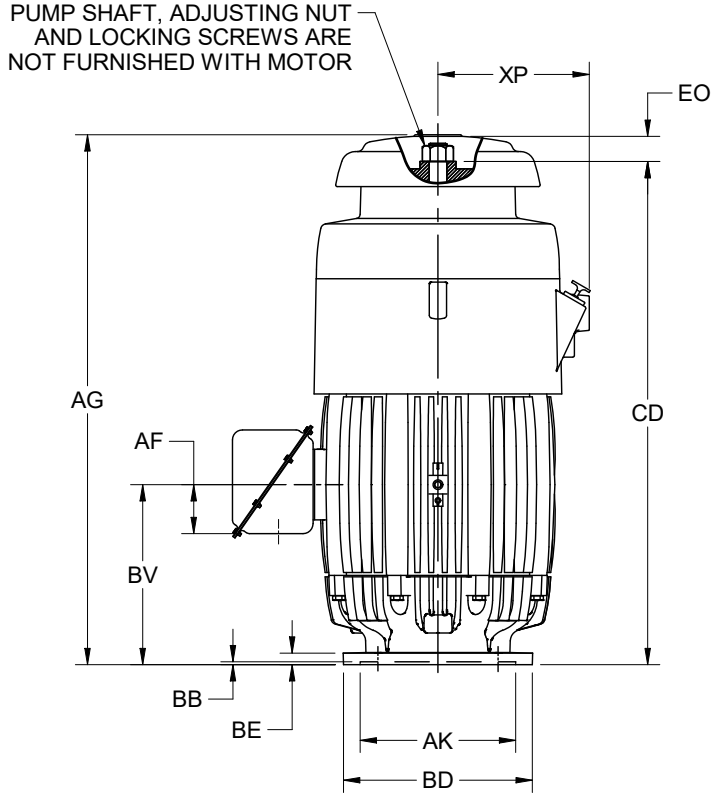

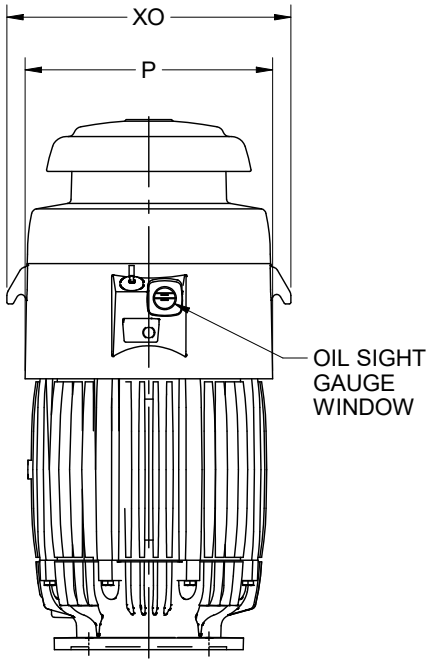


ALL DIMENSIONS ARE IN INCHES AND MILLIMETERS

UNITS	P [2]	AA	AB	AC	AF	AG	AJ
IN	21.50	3.00	17.59	13.63	4.25	46.00	14.750
MM	546		447	346	108	1168	374.65

UNITS	AK +.005	BB MIN	BE	BF	BV	CD	EO
IN	13.500	.25	1.00	.69	15.63	39.94	6.06
MM	342.90	6	25	18	397	1014	154

UNITS	XO	XP
IN	24.63	13.13
MM	626	334

	FRAME	UNITS	BD MAX
	400TP	IN	16.50
		MM	419
	400TPA	IN	20.00
		MM	508

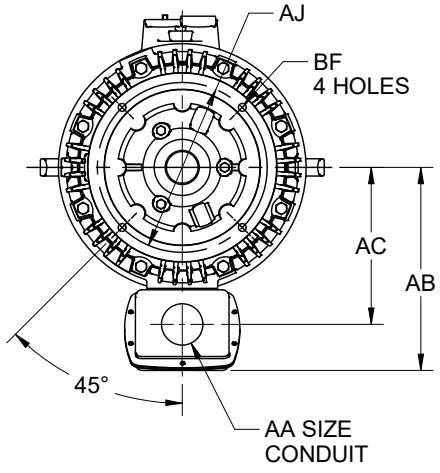

TOLERANCES	
FACE RUNOUT	.007 T.I.R.
PERMISSIBLE ECCENTRICITY OF MOUNTING RABBET	.007 T.I.R.

1. DIMENSIONS MAY VARY ±.25" DUE TO CASTING AND/OR FABRICATION VARIATIONS.
2. LARGEST MOTOR WIDTH.
3. TOLERANCES ARE IN INCHES.
4. CONDUIT BOX MAY BE ROTATED IN STEPS OF 90 DEGREES. STANDARD AS SHOWN WITH CONDUIT OPENING DOWN.

09-3625/A

Nidec Motor Corporation
St. Louis, Missouri

INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION

ISSUED BY	K. FRIEDMAN
APPROVED BY	K. POTTER

IHP_DP_NMCA (MAR-2011) SOLIDEDGE