


EFFECTIVE: 13-MAR-23	**DIMENSION PRINT** **WITH NEMA "P" BASE & WM O/B** **FRAME: 440TP, TPA** **BASIC TYPE: TU**	PRINT: 09-3563
SUPERSEDES: 13-JAN-23		SHEET: 1 OF 1

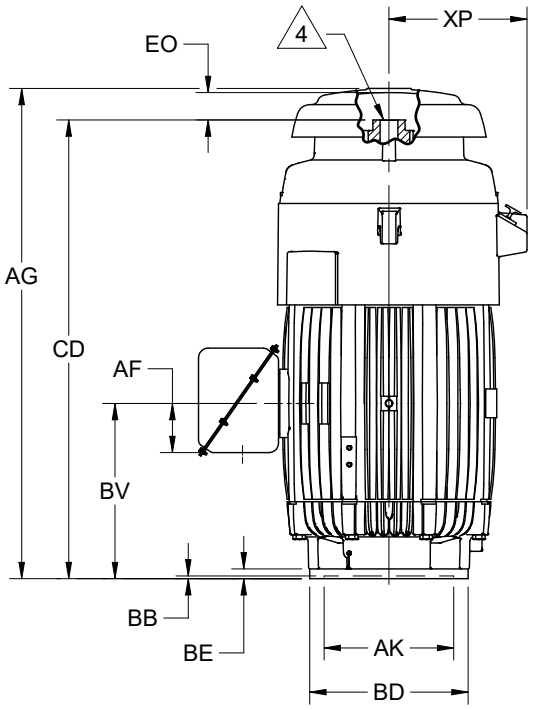

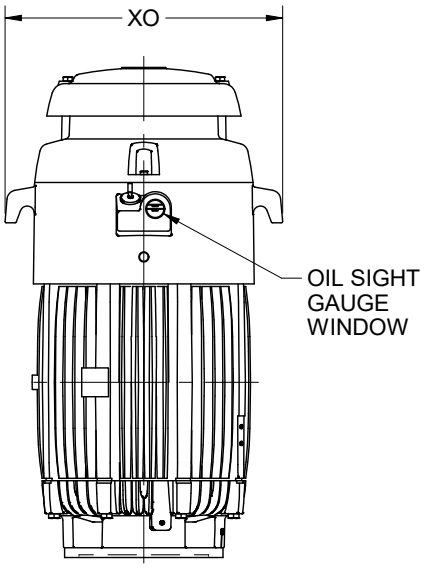

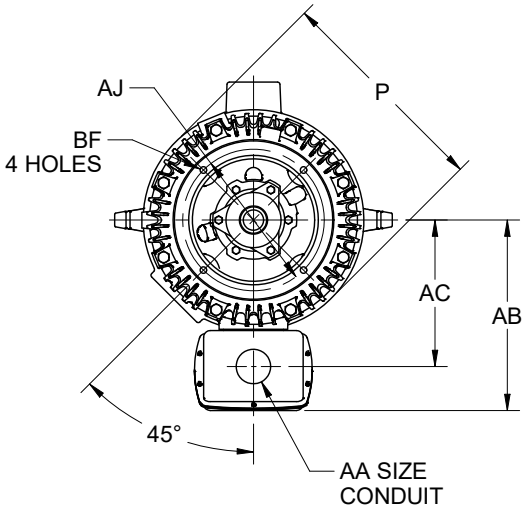

DIMENSIONS ARE IN INCHES AND MILLIMETERS
(TOLERANCES ARE IN INCHES)

	UNITS	P [2]	AA	AB	AC	AF
	IN	23.25	3.00	19.84	15.26	5.13
	MM	591		504	388	130

	UNITS	AJ	AK +.005	BB MIN	BE	BF
	IN	14.750	13.500	.25	1.00	.69
	MM	374.65	342.90	6	25	18

	UNITS	EO	XO	XP
	IN	4.63	28.94	14.38
	MM	117	735	365

	FRAME	UNITS	AG	BV	CD
	444, 445	IN	47.56	16.50	42.50
		MM	1208	419	1080
	447	IN	51.06	18.25	46.00
		MM	1297	464	1168

	FRAME	UNITS	BD MAX
	440TP	IN	16.50
		MM	419
	440TPA	IN	20.00
		MM	508

TOLERANCES	
FACE RUNOUT	.007 T.I.R.
PERMISSIBLE ECCENTRICITY OF MOUNTING RABBET	.007 T.I.R.

1. DIMENSIONS MAY VARY ±.25" DUE TO CASTING AND/OR FABRICATION VARIATIONS.
2. LARGEST MOTOR WIDTH.
3. CONDUIT BOX MAY BE ROTATED IN STEPS OF 90 DEGREES. STANDARD AS SHOWN WITH CONDUIT OPENING DOWN.

4 PUMP SHAFT, ADJUSTING NUT AND LOCKING SCREWS ARE NOT FURNISHED WITH MOTOR.

09-3563/A

Nidec Motor Corporation
St. Louis, Missouri

INFORMATION DISCLOSED ON THIS DOCUMENT
IS CONSIDERED PROPRIETARY AND SHALL NOT BE
REPRODUCED OR DISCLOSED WITHOUT WRITTEN
CONSENT OF NIDEC MOTOR CORPORATION

ISSUED BY
K. FRIEDMAN
APPROVED BY
C. BUCKLEY

IHP_DP_NMCA (MAR-2011) SOLIDEDGE