
EFFECTIVE: 25-FEB-25	VERTICAL MOTORS TEFC - WITH WM OUTLET BOX FRAME: 320TP, TPH BASIC TYPE: TU	PRINT: 09-3558
SUPERSEDES: 21-AUG-23		SHEET: 1 OF 1

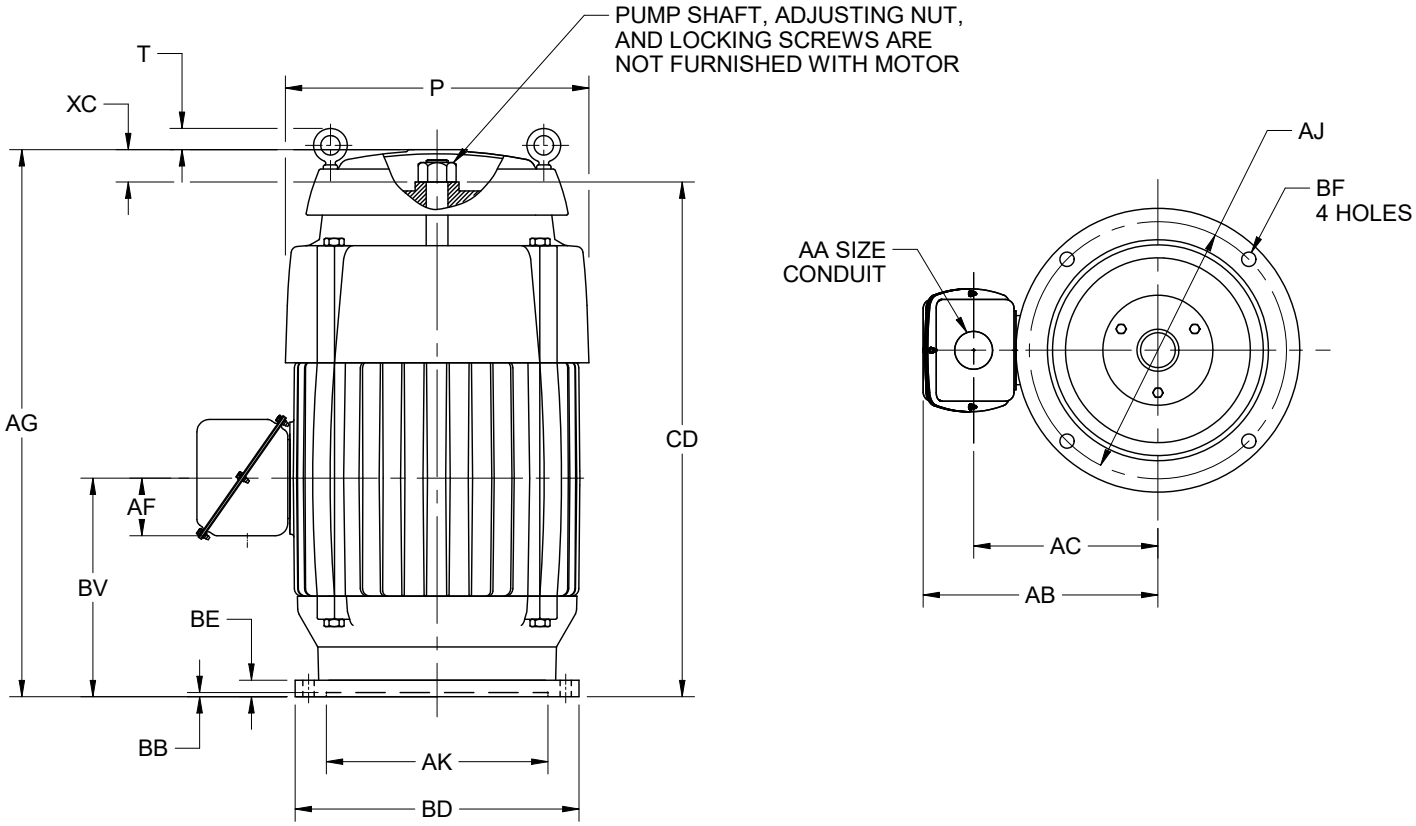

ALL DIMENSIONS ARE IN INCHES & MILLIMETERS

	UNITS	P	T	AA	AB	AC	AF	AG	BE	BV	CD	XC
	IN	17.00	-1.25	2.00	14.19	11.00	3.69	35.63	1.00	11.94	28.50	6.88
	MM	432	-32		360	279	94	905	25	303	724	175

	FRAME	UNITS	AJ	AK	BB MIN	BD MAX	BF
	324,326TP	IN	14.750	13.500	.25	16.50	.69
		MM	374.65	342.90	6	419	18
	324,326TPH	IN	9.125	8.250	.19	12.00	.44
		MM	231.78	209.55	5	305	11

1. ALL ROUGH CASTING DIMENSIONS MAY VARY BY .25" DUE TO CASTING AND/OR FABRICATION VARIATIONS.
2. LARGEST MOTOR WIDTH.
3. CONDUIT BOX MAY BE LOCATED IN STEPS OF 90~ STANDARD AS SHOWN WITH CONDUIT OPENING DOWN.
4. (-) MINUS SIGN INDICATES EYEBOLT IS BELOW THE TOP OF THE UNIT.
5. TOLERANCES SHOWN ARE IN INCHES ONLY.

TOLERANCES	8.250 AK	13.500 AK
FACE RUNOUT	.004 T.I.R.	.007 T.I.R
PERMISSIBLE ECCENTRICITY OF MOUNTING RABBET	.004 T.I.R.	.007 T.I.R
"AK" DIMENSION	-.000;+.003	-.000;+.005

Nidec Motor Corporation
St. Louis, Missouri

INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION

ISSUED BY	E.OVIEDO
APPROVED BY	J.RANGEL

IHP_DP_NMCA (MAR-2011) SOLIDEDGE