
EFFECTIVE: 21-JUL-23	VERTICAL MOTORS TOTALLY ENCLOSED FAN COOLED WITH WM OB FRAME: 364, 365TP TYPE: TU, TUE, TUS, TUI	PRINT: 09-3560
SUPERSEDES: NEW		SHEET: 1 OF 1

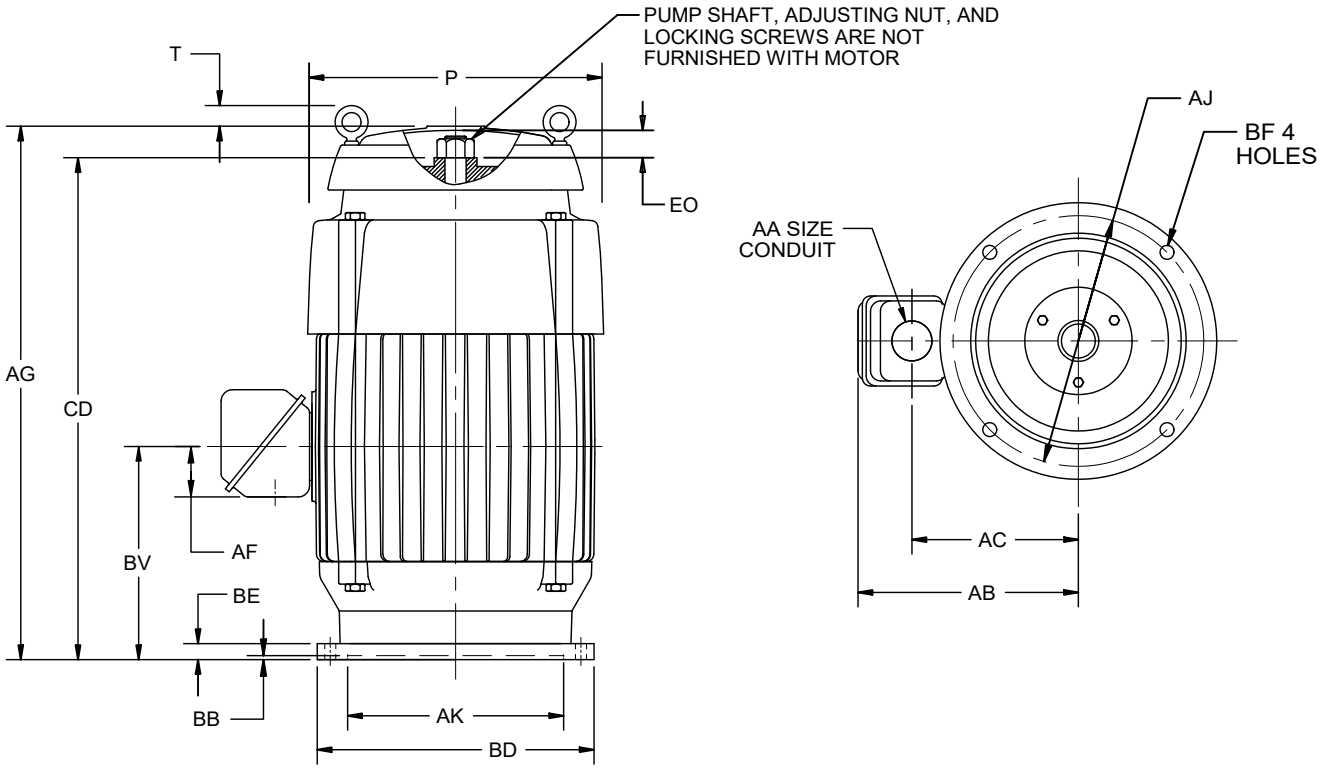

ALL DIMENSIONS ARE IN INCHES AND MILLIMETERS

	UNITS	P [2]	T [4]	AA	AB	AC	AF	AG	AJ
	IN	18.75	-1.69	3.00	16.34	12.38	4.25	36.13	14.750
	MM	476	-43		415	314	108	918	374.65

	UNITS	AK +.005	BB MIN	BD MAX	BE	BF	BV	CD	EO
	IN	13.500	.25	16.50	1.00	.69	13.00	30.00	5.94
	MM	342.90	6	419	25	18	330	762	151

1. ALL ROUGH DIMENSIONS MAY VARY BY .25" DUE TO CASTING AND/OR FABRICATION VARIATIONS.
2. LARGEST MOTOR WIDTH.
3. CONDUIT OPENINGS MAY BE LOCATED IN STEPS OF 90 DEGREES REGARDLESS OF LOCATION. STANDARD AS SHOWN WITH CONDUIT OPENING DOWN.
4. (-) MINUS SIGN INDICATES EYEBOLT IS BELOW THE TOP OF THE UNIT.
5. TOLERANCES SHOWN ARE IN INCHES ONLY.

TOLERANCES	
FACE RUNOUT PERMISSIBLE ECCENTRICITY	.007 T.I.R.
OF MOUNTING RABBET	.007 T.I.R.

Nidec Motor Corporation
St. Louis, Missouri

INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION

ISSUED BY	D. CORTES
APPROVED BY	E. OVIEDO

IHP_DP_NMCA (MAR-2011) SOLIDEDGE