Permanent Split Capacitor, Direct Drive Fan, Double Shaft 5.6" Diameter, Open Drip-Proof




APPLICATIONS:

Design to meet manufacturer's requirements for blowers utilizing a double-shaft motor.

FEATURES:

- Open Drip Proof, Air Over, Except Where Noted
- Automatic Reset Thermal Overload Protector
- Bearings Have All Angle Thrust System
- Continuous Duty, Air Over
- Connection & Capacitor Information Furnished in Nameplate Data
- Designed for Use with 370V Capacitors
- Mounting Holes in Shell for Mounting Capacitor
- When Supplied, Capacitor and Mounting Hardware are Supplied Detached

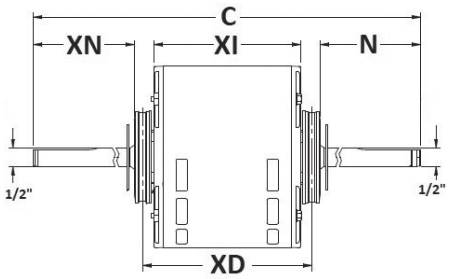

Stud or Hub Mount

HP	RPM/Spds.	Voltage	Catalog Number	List	Cap. MFD	Amps	Shaft N	Shaft XN	Base XD	Shell XI	Total C	Ship Wt. (lbs)	Notes
1/8	1075 / 3 SPD	115	1186	$350	5	2.1	6.0	6.0	-	3.8	15.8	18.1	H45
	1075 / 3 SPD	208-230	1187	$356	5	0.9	6.0	6.0	-	3.8	15.8	18.1	H45
1/5	1075 / 3 SPD	230	1152	$365	5	1.4	5.1	4.5	-	3.8	13.4	12.5	CI,H31,TR
1/4	1625 / 3 SPD	230	8725	$354	6	1.6	7.0	7.0	-	4.1	18.06	11.7653	
	1075 / 3 SPD	230	3134	$256	5	2.0	8.0	8.0	-	4.5	20.1	14.4	
1/3	1625 / 3 SPD	230	8726	$366	7.5	1.9	7.0	7.0	-	4.3	18.3	15.6	
	1075 / 3 SPD	230	3135	$196	5	2.5	8.0	8.0	-	4.5	21.1	15.56	
1/2	1075 / 3 SPD	230	3136	$214	5	4.5	8.0	8.0	-	5.4	21.9	20	
3/4	1075 / 3 SPD	208-230	1894	$326	7.5	5.0	7.2	7.7	6.1	5.5	20.6	17.9	CI

Resilient Base, Capacitor Included

HP	RPM/Spds.	Voltage	Catalog Number	List	Cap. MFD	Amps	Shaft N	Shaft XN	Base XD	Shell XI	Total C	Ship Wt. (lbs)	Notes
1/8	775 / 3 SPD	115	1416	$207	5	1.65	11.6	10.8	5.0	4.6	28	17.2	
1/6	775 / 3 SPD	115	1415	$220	7.5	1.43	11.6	10.8	5.0	4.5	28	13.44	
	1075 / 3 SPD	115	1240	$253	5	2.9	7.0	7.0	4.6	4.1	18.6	18.1	
1/4	1625 / 2 SPD	115	1242	$287	3	3.6	7.0	7.0	4.4	3.9	18.9	20.2	
	1625 / 2 SPD	230	1243	$295	3	1.8	7.0	7.0	4.9	4.4	18.9	19.45	
	1075 / 2 SPD	115	1244	$270	5	4.4	7.0	7.0	5.0	4.9	19.4	18.1	
1/3	1100 / 3 SPD	230	5108	$279	5	2.3	4.2	4.6	5.0	4.3	14.2	20	H45,TR
	1075 / 3 SPD	230	1247	$303	5	2.5	9.2	9.2	5.6	5.1	24	18.1	

Note CI Capacitor Included Mounted
Note H31 Includes Special Mounting Lugs, No Threaded Studs
Note H45 Totally Enclosed, Air Over
Note TR OEM to Trane

For the latest catalog update, please reference our eCatalog

Permanent Split Capacitor, Direct Drive Fan, Double Shaft 5.6” Diameter, Open Drip-Proof

(continued)



Hub Ring Mount with adjustable length adapter, without Capacitor

HP	RPM/Spds.	Voltage	Catalog Number	List	Cap. MFD	Amps	Shaft N	Shaft XN	Base XD	Shell XI	Total C	Ship Wt. (lbs)	Notes
1/8	1075 / 3 SPD	115	NAL1006	$264	5	2.2	8.7	9.2	4.0	3.5	22	8.55	
	1075 / 3 SPD	208-230	NA1006	$270	5	0.9	8.5	9.1	4.3	3.8	22	9.38	
1/6	1075 / 3 SPD	115	NAL1016	$258	5	2.8	8.5	9.1	4.3	3.8	22	9.8	
	1075 / 3 SPD	208-230	NA1016	$199	5	1	8.5	9.1	4.3	3.8	22	9.16	
1/4	1625 / 3 SPD	115	NAL1024	$339	5	4.1	8.5	8.7	4.8	4.3	22	12.76	
	1625 / 3 SPD	208-230	NA1024	$345	5	2.1	9	8.6	4.8	4.3	22	11.47	
	1075 / 3 SPD	115	NAL1026	$288	5	4.3	8.4	8.7	4.8	4.3	22	10.91	
	1075 / 3 SPD	208-230	NA1026	$249	5	1.9	8.4	8.9	4.6	4.1	22	10.78	
1/3	1625 / 3 SPD	115	NAL1034	$374	5	5.70	8.5	8.4	5.1	4.6	22	12.74	
	1625 / 3 SPD	208-230	NA1034	$357	5	2.8	9	8.4	5.1	4.6	22	12.98	
	1625 / 3 SPD	230	1887	$366	5	2.2	8	8	4.8	4.3	20.8	16	64
	1075 / 3 SPD	115	NAL1036	$295	5	7.15	7.7	9	5.3	4.8	22	14.94	
	1075 / 3 SPD	208-230	NA1036	$266	5	2.6	8.1	9	5.3	4.8	22	13.72	
	1075 / 3 SPD	230	1213	$272	5	2.5	8	8	4.8	4.3	20.8	17.2	64
1/2	1625 / 3 SPD	115	NAL1054	$410	5	6.04	8.1	8.5	5.8	5.3	22	17.96	
	1625 / 3 SPD	208-230	NA1054	$395	5	4.3	8.1	8.5	5.8	5.3	22	16.86	
	1075 / 3 SPD	115	NAL1056	$361	10	7.3	8.1	8	5.8	5.3	22	16.29	
	1075 / 3 SPD	208-230	NA1056	$310	7.5	3.37	8.1	8.5	5.8	5.3	22	16.12	
	1075 / 3 SPD	230	1824	$318	5	4.5	9	9	N/A	5.4	24	20	64
3/4	1625 / 3 SPD	208-230	NA1074	$458	7.5	4.04	8.2	8.1	6	5.5	22	18.01	
	1075 / 3 SPD	115	NAL1076	$457	15	8.2	8.1	8.2	6	5.5	22	17.39	
	1075 / 3 SPD	208-230	NA1076	$446	7.5	4.8	8.3	8.3	5.8	5.3	22	17.39	

Note 64 Capacitor Supplied Detached