
EFFECTIVE: 31-JUL-26	DIMENSION PRINT WPI TYPE 1 FRAME: 213, 215VP BASIC TYPE: AV	PRINT: 09-2321
SUPERSEDES: 23-MAR-11		SHEET: 1 OF 1

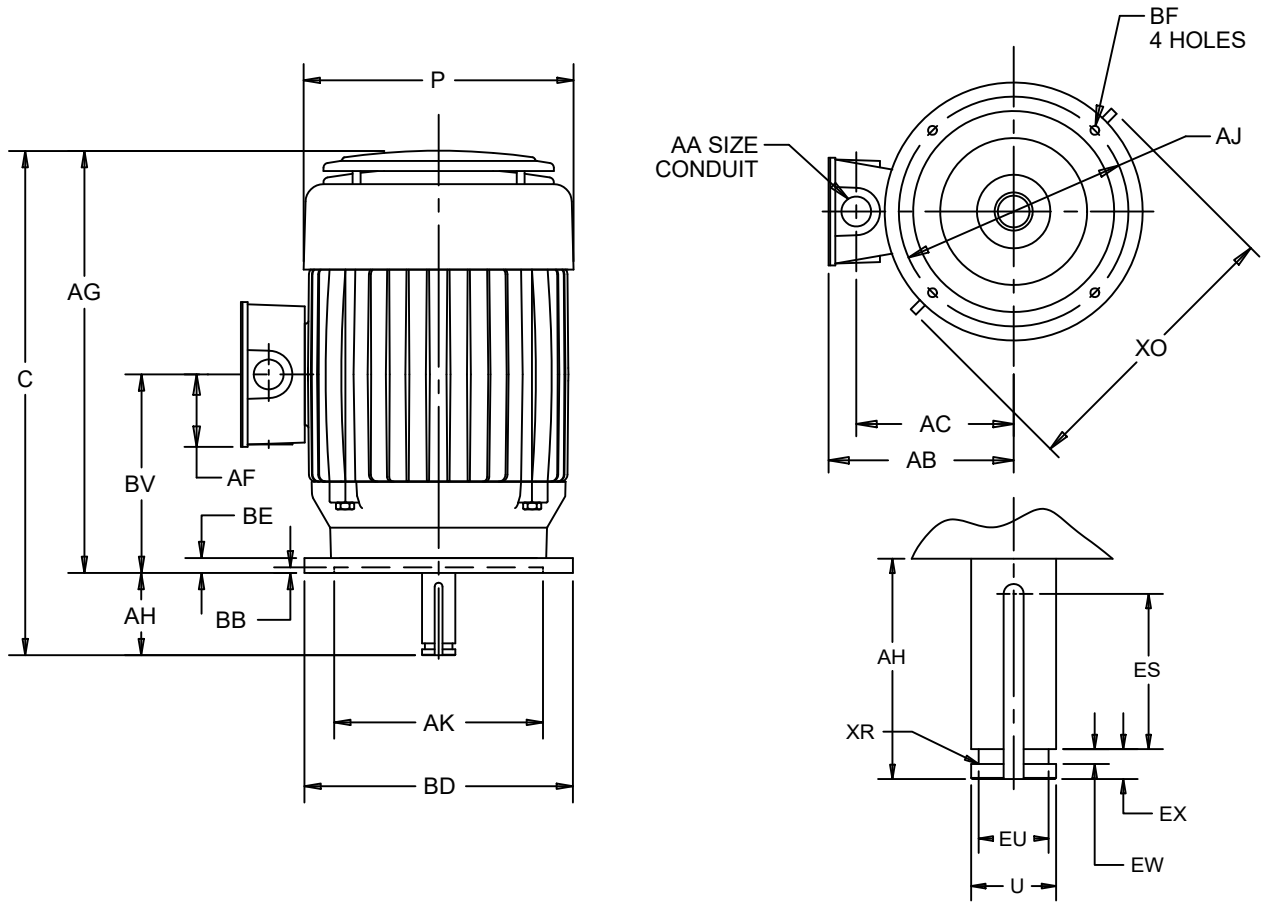

ALL DIMENSIONS ARE IN INCHES AND MILLIMETERS

	UNITS	C	P [2]	U -.0005	AA	AB	AC	AF	AG	AH -.063	AJ	AK +.003
	IN	21.84	11.13	1.1250	1.00	7.86	6.61	3.19	19.09	2.750	9.125	8.250
	MM	555	283	28.575		200	168	81	485	69.85	231.78	209.55

	UNITS	BB MIN	BD MAX	BE	BF	BV	ES MIN	EU -.005	EW +.002	EX -.005	XO	XR	SQ KEY
	IN	.19	10.00	.75	.44	8.00	1.28	.875	.375	.750	12.75	.03	.250
	MM	5	254	19	11	203	32	22.23	9.53	19.05	324	.8	6.35

1. ALL ROUGH DIMENSIONS MAY VARY BY .25" DUE TO CASTING AND/OR FABRICATION VARIATIONS.
2. LARGEST MOTOR WIDTH.
3: CONDUIT OPENINGS MAY BE LOCATED IN STEPS OF 90 DEGREES. STANDARD AS SHOWN WITH CONDUIT OPENING DOWN.
4: TOLERANCES SHOWN ARE IN INCHES ONLY.

TOLERANCES	
FACE RUNOUT	.004 T.I.R.
PERMISSIBLE ECCENTRICITY OF MOUNTING RABBET	.004 T.I.R.
PERMISSIBLE SHAFT RUNOUT	.002 T.I.R.

09-2321/A

Nidec Motor Corporation
St. Louis, Missouri

INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION

US MOTORS

ISSUED BY
G. MARTINEZ
APPROVED BY
L. ARROYO

IHP_DP_NMCA (MAR-2011) SOLIDEDGE