


# Permanent Split Capacitor Condenser Fan 5.6" Diameter, Totally Enclosed, Air Over (TEAO)

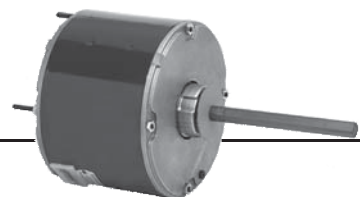


## APPLICATIONS:

Residential and commercial condensing unit fan motors to meet manufacturer's requirements.

## FEATURES:

- 140°F (60°C) Ambient Design
- Bearings have All Angle Thrust System
- Class B Insulation
- Designed for use with 370V Capacitors
- Extended Studs
- 36" Leads
- Hubless Lead End
- Drain Holes Both Ends
- Reversible Rotation
- Automatic Reset Thermal Overload Protector
- Continuous Duty

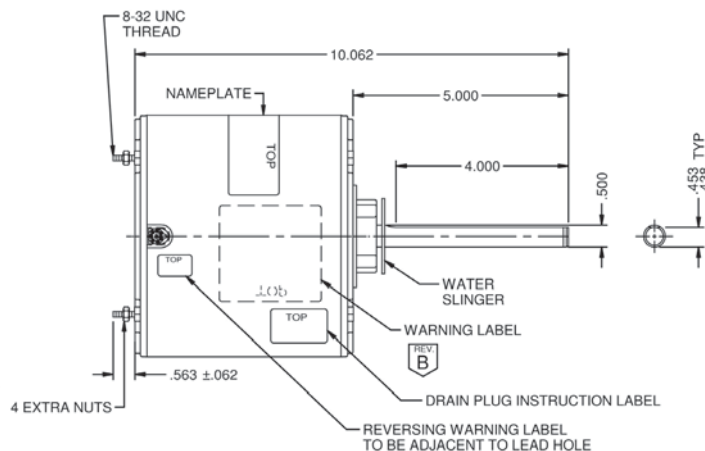

## Stud Mount, Without Capacitor, 60°C, All Angle Mount

| HP      | RPM   | Voltage | Catalog Number | Bearings | Cap. MFD | Amps | Shaft N | Shell XI | Total C | Rotation | Ship Wt. | Notes   | OEM |
|---------|-------|---------|----------------|----------|----------|------|---------|----------|---------|----------|----------|---------|-----|
| 1/12    | 1100  | 208-230 | 3401           | SAB      | 5.0      | 0.7  | 1.6     | 4.1      | 5.7     | CWLE     | 9        | H20     | CA  |
| 1/10    | 825   | 208-230 | 1871           | SAB      | 3.0      | 1.0  | 6.0     | 3.8      | 10.4    | -        | 10       |         |     |
|         | 1100  | 208-230 | 3402           | SAB      | 5.0      | 0.8  | 1.6     | 4.1      | 5.7     | -        | 9        |         | CA  |
| 1/8     | 825   | 208-230 | 1872           | SAB      | 5.0      | 0.8  | 6.0     | 4.1      | 10.6    | -        | 11       | 72      |     |
|         | 825   | 200-230 | 1902           | Ball     | 5        | .74  | 1.9     | 4.4      | 6.2     | CCWLE    | 10.7     |         | TR  |
|         | 825   | 208-230 | 5456           | SAB      | 5.0      | 1.2  | 3.8     | 4.1      | 7.8     | -        | 11       | 72      | RH  |
| 1/6     | 825   | 208-230 | 1873           | SAB      | 5.0      | 1.0  | 6.0     | 4.1      | 10.6    | -        | 12       | 72      |     |
|         | 825   | 208-230 | 5457           | SAB      | 7.5      | 1.2  | 3.8     | 4.6      | 8.3     | -        | 13       | 72      | RH  |
|         | 825/2 | 208-230 | 8673           | SAB      | 5.0      | 1.0  | 6.0     | 4.4      | 10.9    | -        | 14       |         |     |
|         | 1075  | 208-230 | 1859           | SAB      | 5.0      | 1.0  | 5.0     | 3.8      | 9.4     | -        | 11       |         |     |
| 1/5     | 1500  | 208-230 | 3405           | Ball     | 5.0      | 0.8  | 1.6     | 4.3      | 6.2     | -        | 9        | H20     | CA  |
|         | 825   | 200-230 | 1903           | Ball     | 7.5      | .93  | 2.3     | 5.1      | 7.3     | CCWLE    | 15.0     |         | TR  |
|         | 1075  | 208-230 | 5450           | SAB      | 3.0      | 1.3  | 3.7     | 3.8      | 7.5     | -        | 11       | 72, H16 | RH  |
|         | 1075  | 208-230 | 5454           | SAB      | 3.0      | 1.7  | 3.7     | 3.8      | 8.1     | -        | 11       | 72      | RH  |
| 1/4-1/8 | 825   | 208-230 | 1874           | SAB      | 5.0      | 2.0  | 6.0     | 4.3      | 10.9    | -        | 13       | 72      |     |
| 1/4     | 825   | 460     | 1880           | Ball     | 5.0      | 1.0  | 6.0     | 5.1      | 11.6    | -        | 14       |         |     |
|         | 825   | 575     | 1276           | Ball     | 5        | 0.7  | 5.0     | 4.5      | 9.9     | Rev.     | 10       |         |     |
|         | 850   | 208-230 | 1743           | SAB      | 5.0      | 1.5  | 2.8     | 4.6      | 7.3     | -        | 10       | H20     | YK  |
|         | 825/2 | 208-230 | 8674           | SAB      | 7.5      | 1.5  | 6.0     | 4.6      | 11.1    | -        | 15       |         |     |
|         | 1075  | 208-230 | 1860           | SAB      | 5.0      | 1.5  | 5.0     | 4.1      | 9.6     | -        | 12       |         |     |
|         | 1075  | 208-230 | 1876           | Ball     | 5.0      | 1.5  | 5.0     | 4.1      | 9.6     | -        | 11       |         |     |
|         | 1075  | 460     | 3736           | Ball     | 7.5      | 0.8  | 6.0     | 4.6      | 11.1    | -        | 12       |         |     |
|         | 1100  | 208-230 | 3404           | SAB      | 5.0      | 1.8  | 1.6     | 4.6      | 6.2     | -        | 12       | H20     | CA  |
|         | 1625  | 208-230 | 1890           | SAB      | 5.0      | 1.4  | 5.0     | 4.3      | 9.9     | -        | 12       |         |     |

CA = Carrier

IC = ICP

RH = Rheem

YK = York

TR = Trane

Note 72: Includes 4 Holes in Shell for Rheem Mount

Note H16: CCWLE rotation only

Note H20: CWLE rotation only

\*Uses 440V capacitor.

† All marks shown within this document are properties of their respective owners.

