



Permanent Split Capacitor Condenser Fan 5.6" Diameter, Open Dripproof, Air Over

APPLICATIONS:

To meet manufacturer's requirements for condenser cooling fans.

FEATURES:

- High Efficiency ECONOMIZER® Rated (except as noted)
- 60 Hertz
- Capacitor Mounting Holes In Frame Band
- Continuous Duty, Air Over
- Water Slinger
- Suitable For Use with 370V Capacitor
- Automatic Reset Thermal Overload Protector
- Bearings have All Angle Thrust System
- Green Ground Lead
- Reversible Rotation
- Class B Insulation
- Extended Studs are 8-32 UNC Thread unless otherwise noted
- 30" Leads
- Double Flats On Shaft
- Enclosed End Shield At Shaft End
- **Discount Symbol: DS-3HAC**

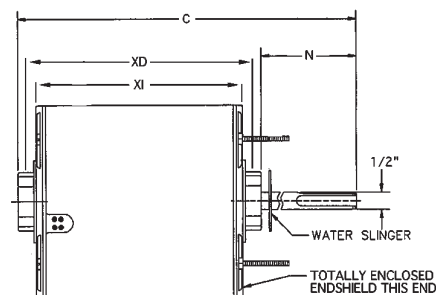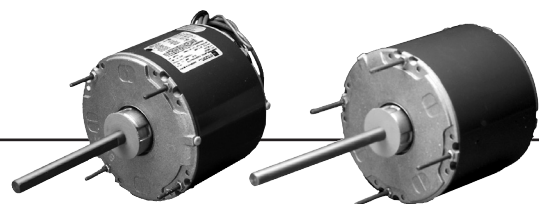

Stud Mount, Shaft Up or Horizontal, Without Capacitor

HP	RPM	Voltage	Catalog Number	List	Bearings	Cap. MFD	Amps	Shaft N	Base XD	Shell XI	Total C	Ship Wt. (lbs)	Notes	OEM
1/8	1550	230	1675	\$168	SAB	5.0	0.79	3.0		3.8	6.8	9		TR
1/4	825	230	8666	\$242	SAB	5.0	1.9	6.0	5.1	4.6	11.6	14		
	1075	208-230	3851	\$104	SAB	5.0	1.7	5.0	4.4	3.8	9.9	14	62	
1/4	1110	208-230	8230	\$126	SAB	5.0	1.6	3.3	-	3.8	7.1	10	63,72,H33,H42	
1/3	825	230	8667	\$253	SAB	7.5	2.0	6.0	5.6	5.1	12.1	16	63	
	1075	208-230	6880	\$113	SAB	5.0	2.5-2.2	5.0	4.9	4.3	9.4	12	62	
1/2	1075	208-230	3852	\$121	SAB	7.5	3.1	5.0	5.4	4.8	10.9	15	62	
	1075	230	1444	\$182	Ball	7.5	3.1	6.0	5.6	5.1	12.2	18		
3/4	1075	208-230	3097	\$148	SAB	10.0	4.7	5.0	6.6	6.1	12.1	20		
	1075	230	8665	\$204	Ball	12.5	4.4	6.0	5.9	5.3	12.4	23		
1	1075	208-230	1888	\$358	Ball	15.0	5.2	6.0	6.8	6.3	13.4	25	62	

TR = Trane®†

Note 62 Not an ECONOMIZER® Motor
 Note 63 Stud Extensions out Both Sides of Motor
 Note 72 Includes Q-4 holes in shell for Rheem®† Mount

Note H33 No Hub on Lead End
 Note H42 Shaft-end Ventilated, Lead-end Enclosed, Shaft-down Mounting Only

† All marks shown within this document are properties of their respective owners.



Permanent Split Capacitor, Condenser Fan 5.6" Diameter, Open Dripproof Air Over

APPLICATIONS:

For use on condenser cooling fans.

FEATURES:

- High Efficiency ECONOMIZER® Rated (except as noted)
- 20" or 30" Leads unless otherwise noted
- Double Flats On Shaft (ECONOMIZER® Models)
- Capacitor Mounting Holes In Frame Band
- Suitable for Use With 370V Capacitors
- Automatic Reset Thermal Overload Protector
- Bearings Have All Angle Thrust System
- Enclosed Endshield at Shaft End
- Continuous Duty, Air Over
- Class B Insulation
- Green Ground Lead
- Extended Studs
- 60 Hertz
- Reversible Rotation
- Water Slinger
- Discount Symbol: DS-3HAC


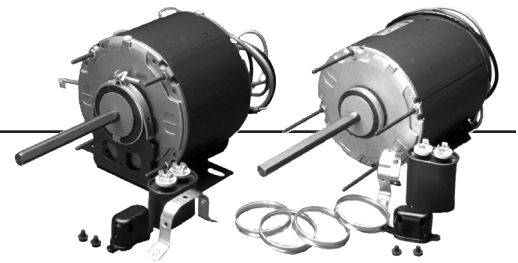


Figure A




Figure B

Resilient Base, Shaft Up or Horizontal With Capacitor

HP	RPM	Voltage	Catalog Number	List	Bearings	Cap. MFD	Amps	Shaft N	Base XD	Shell XI	Total C	Stud YM	Ship Wt. (lbs)	Notes	OEM
1/4	1075	230	3846	\$257	SAB	5.0	1.9	4.9	5.1	4.6	10.4	1	15	62	
1/3	1625	230	4811	\$259	SAB	5.0	1.8	4.9	5.1	4.6	10.7	1	16		
	1625	230	4961	\$360	Ball	5.0	1.8	4.9	5.1	4.6	10.7	1	17	62	
	1075	230	3847	\$269	SAB	7.5	2.2	4.9	5.5	4.9	10.9	1	16		
	1075	230	4960	\$295	Ball	7.5	2.2	4.9	5.4	4.8	10.9	1	16		
1/2	1075	230	3848	\$280	SAB	7.5	3.1	5.0	6.5	5.9	12.0	1	19		
	1075	230	7025	\$349	Ball	7.5	3.1	4.9	6.4	6.0	11.9	1	18		

Hub Ring Mount (2 1/4"), Shaft Up or Horizontal, Without Capacitor (unless otherwise noted)

HP	RPM	Voltage	Catalog Number	List	Bearings	Cap. MFD	Amps	Shaft N	Base XD	Shell XI	Total C	Stud YM	Ship Wt. (lbs)	Notes	OEM
1/5 / 1/6	1075	208-230	8537	\$144	SAB	5.0	1.4/1.8	3.31	4.1	3.56	7.4	-	10	62	RH
1/3	825	230	5345	\$267	Ball	5.0	3.0	6.0	6.4	6.4	12.9	1	19	64	
	825	208-230	7040	\$242	Ball	7.5	2.7	6.0	6.0	6.0	12.4	1	18		
1/2	825	208-230	7041	\$358	Ball	12.5	2.8	6.0	5.8	5.8	13.2	1	21		

RH = Rheem®

Note 62 Not an ECONOMIZER® Motor
Note 64 Capacitor Supplied Detached

† All marks shown within this document are properties of their respective owners.

