


Permanent Split Capacitor Condenser Fan 5.6" Diameter, Open Drip-Proof, Air Over

APPLICATIONS:

For use on condenser cooling fans.

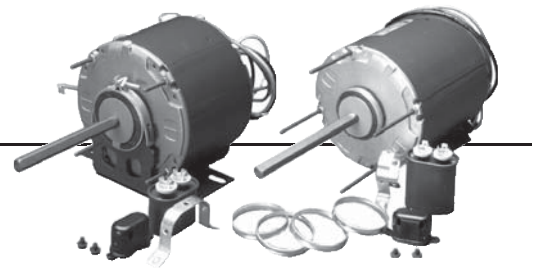

FEATURES:

- High Efficiency Economizer® Rated (except as noted)
- 20" or 30" Leads unless otherwise noted
- Double Flats on Shaft—Economizer® Models
- Capacitor Mounting Holes in Frame Band
- Designed for use with 370V Capacitors
- Automatic Reset Thermal Overload Protector
- Bearings have All Angle Thrust System
- Enclosed Endshield at Shaft End
- Continuous Duty, Air Over
- Class B Insulation
- Green Ground Lead
- Extended Studs
- 60 Hz
- Reversible Rotation
- Water Slinger




Figure A

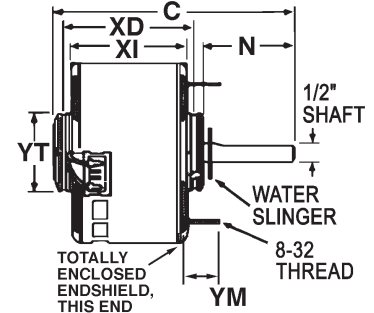


Figure B

Resilient Base, Shaft Up or Horizontal, With Capacitor (Figure A)

HP	RPM/ Spds.	Voltage	Catalog Number	Bearings	Cap. MFD	Amps	Shaft N	Base XD	Shell XI	Total C	Stud YM	Ship Wt.	Notes	OEM
1/4	1075	230	3846	SAB	5.0	1.9	4.9	5.1	4.6	10.4	1	15	62	
1/3	1625	230	4811	SAB	5.0	1.8	4.9	5.1	4.6	10.7	1	16		
	1625	230	4961	Ball	5.0	1.8	4.9	5.1	4.6	10.7	1	17	62	
	1075	230	3847	SAB	7.5	2.2	4.9	5.5	4.9	10.9	1	16		
	1075	230	4960	Ball	7.5	2.2	4.9	5.4	4.8	10.9	1	16		
1/2	1075	230	3848	SAB	7.5	3.1	5.0	6.5	5.9	12.0	1	19		
	1075	230	7025	Ball	7.5	3.1	4.9	6.4	6.0	11.9	1	18		

Hub Ring Mount (2 1/4"), Shaft Up or Horizontal, Without Capacitor (Figure B)

HP	RPM/ Spds.	Voltage	Catalog Number	Bearings	Cap. MFD	Amps	Shaft N	Base XD	Shell XI	Total C	Stud YM	Ship Wt.	Notes	OEM
1/8-1/5	1075	230	8537	SAB	5.0	0.8/1.4	3.31	4.1	3.56	7.4		10	62	RH
1/4	1625	208-230	1355	Ball	-	1.2	5.8	6.2	5.6	12.0	1	11		
1/3	825	230	5345	Ball	5.0	3.0	6.0	6.9	6.4	12.9	1	19	64	
	825	208-230	7040	Ball	7.5	2.7	6.0	6.4	6.0	12.4	1	18		
1/2	825	230	7041	Ball	12.5	2.8	6.0	6.7	5.8	13.2	1	21		

RH = Rheem

Note 62: Not an Economizer® model

Note 64: Capacitor Supplied Detached

† All marks shown within this document are properties of their respective owners.

