

Three Phase Commercial Belt-Drive Blower Motor Open Drip-Proof, Air Over Not Required




APPLICATIONS:

Designed to meet manufacturer's requirements for belt-drive blowers in commercial air conditioning applications where 3 phase power is required.

FEATURES:

- Automatic Reset Thermal Overload Protector
- Reversible Rotation
- Continuous Duty
- Double Contact Sealed Ball Bearings
- Dual Voltage
- Class B Insulation
- 104°F (40°C) Ambient

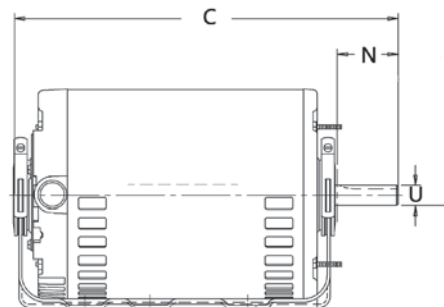

Rigid Base Mount

HP	RPM	Voltage	Catalog Number	Bearings	NEMA Frame	Amps	Shaft N	Shaft U	SF	Total C	Ship Wt.	Notes	OEM
1	1725	200-230/460	481468	Ball	56	3.4-3.4/1.7	1.9	.625	1.15	11.3	24	25	
	1725	208-230/460	1813	Ball	56	3.4/1.7	1.9	.625	1.15	11.9	24	VC	
1-1/2	1725	208-230/460	1814	Ball	56H	5.0/2.5	1.9	.625	1.15	12.4	27	VC, H12	
	1725	200-230/460	7913	Ball	56HZ	5.0/2.5	2.3	.875	1.15	12.4	39	H12	LE
	1725/1	575	1197	Ball	56HZ	2.0	2.3	-	-	13.3	36	H12	
2	1725	208-230/460	1815	Ball	56H	6.6/3.3	1.9	.625	1.15	12.4	29	VC, H12	
	1725	200-230/460	7914	Ball	56HZ	7.6-7.8/3.9	2.3	.875	1.15	12.4	45	H12	LE
	1725	208-230/460	8461	Ball	145T	6.3-6.2/3.1	2.3	.875	1.00	12.5	37	H18, H45, 25	
3	1725	200-230/460	7915V	Ball	56HZ	9.0-9.2/4.6	2.3	.875	1.15	13.3	45	H12	LE
	1725	575	1089	Ball	56	3.44	2.25	.875	1.15	13.2	32		
5	1760	208-230/460	D5PA2A	Ball	184T	13.8-12.6/6.3	2.9	1.125	1.15	15	68		LE
7.5	1760	208-230/460	D7PA2A	Ball	213T	20.5-18.5/9.2	3.5	1.375	1.15	15.96	90		LE



Resilient Mount

HP	RPM	Voltage	Catalog Number	Bearings	NEMA Frame	Amps	Shaft N	Shaft U	SF	Total C	Ship Wt.	Notes	OEM
1/2	1725	208-230/460	8488	Ball	56	2.0-1.9/0.95	1.9	.625	1.25	10.3	20		
3/4	1725	208-230/460	8489	Ball	56	2.9-2.9/1.5	1.9	.625	1.25	10.8	22		
1	1725	208-230/460	8498	Ball	56H	4.3/2.2	1.9	.625	1.25	11.3	26	H12	
1-1/2	1725	208-230/460	8490	Ball	56H	5.2-5.1/2.6	1.9	.625	1.15	12.8	32	H12	
	1725	208-230/460	8491	Ball	145T	5.0-4.6/2.4	2.3	.875	1.15	13.2	40		
2	1725	208-230/460	8493	Ball	56H	6.1-6.3/3.1	1.9	.625	1.15	12.8	41	H12	

Note 25: No Protector
 Note H12: Base Has Holes For 56 & 56H
 Note H18: Conduit Box

Note H45: Totally Enclosed, Air Over
 Note VC: Quick Voltage Change Device
 ~ 50 Hz

† All marks shown within this document are properties of their respective owners.

