

ProPress® Zero Lead Bronze Check Valve Model 2974ZL*

Description

- Zero Lead Bronze Body
- ProPress Ends
- Spring Check
- EPDM Seals
- 0.5 psi Cracking Pressure

Features

- Low Pressure Loss
- Silent Operation
- Stainless Steel Spring
- Smart Connect® feature

Ratings

- 400 WOG
- Max. Operating Pressure: 200 psi
- Temperature Range: 0°F - 200°F



Approvals

- Conforms to MSS SP-80
- NSF-61 Annex G

ZERO LEAD™



Pressure Drop

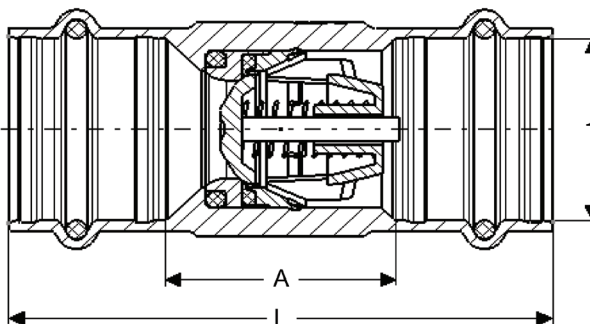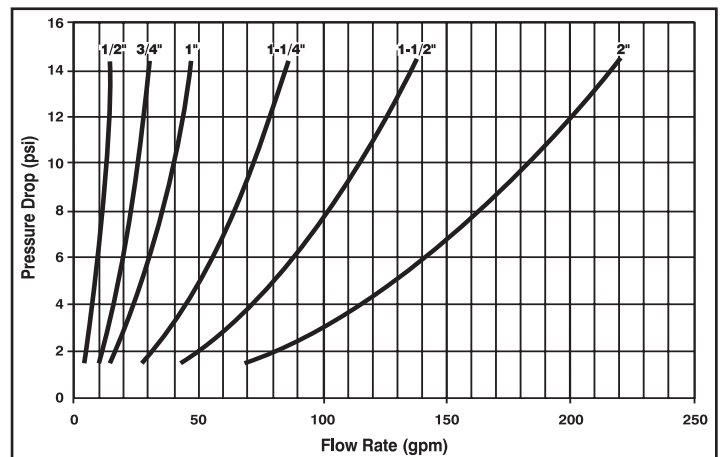

Part No	d	A (in)	L (in)	Wt (lbs)
79035	1/2"	0.87	2.52	0.17
79040	3/4"	1.14	2.95	0.28
79045	1"	1.34	3.15	0.42
79050	1 1/4"	1.69	3.74	0.60
79055	1 1/2"	2.09	4.92	0.96
79060	2"	2.56	5.71	1.87

*Zero Lead identifies Viega® products meeting the lead free requirements of NSF 61-G through testing under NSF/ANSI 372 (0.25% or less maximum weighted average lead content).

This document subject to updates. For the most current Viega technical literature please visit www.viega.us.
Click Services -> Click Electronic Literature Downloads -> Select Product Line -> Select Desired Document

Viega LLC, 100 N. Broadway, 6th Floor • Wichita, KS 67202 • Ph: 800-976-9819 • Fax: 316-425-7618