
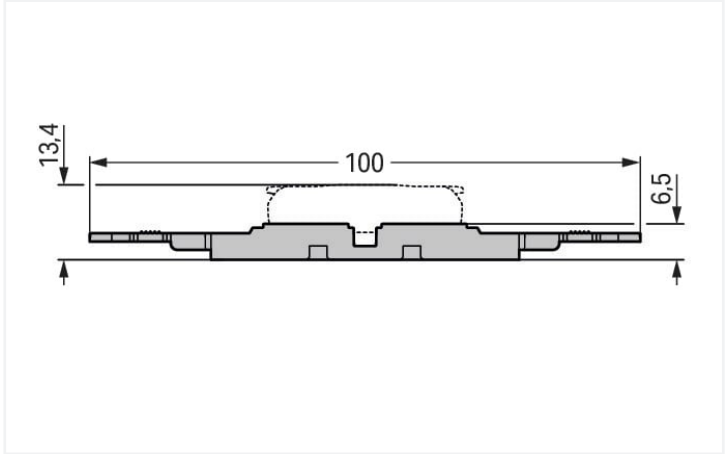


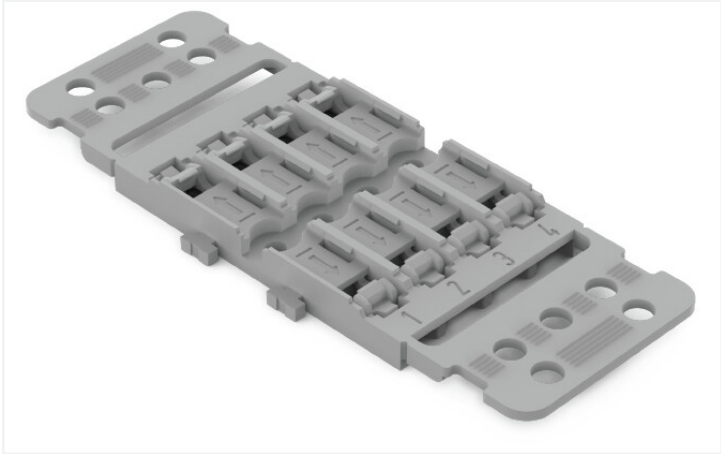

Color: ■ gray

Physical data	
Width	38.8 mm / 1.528 inches
Height from the surface	6.5 mm / 0.256 inches
Depth	100 mm / 3.937 inches
Material data	
Note (material data)	Information on material specifications can be found here
Color	gray
Fire load	0.24 MJ
Weight	8 g
Commercial data	
ETIM 8.0	EC002848
ETIM 7.0	EC002848
PU (SPU)	25 (5) pcs
Packaging type	Box
Country of origin	CN
GTIN	4066966119855
Customs tariff number	39269097900
Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 221-2504	

CAD/CAE-Data			
CAD data		CAE data	
2D/3D Models 221-2504		EPLAN Data Portal 221-2504	
		ZUKEN Portal 221-2504	

1 Compatible Products
1.1 Optional Accessories
1.1.1 Installation
1.1.1.1 Mounting accessories



[Item No.: 209-119](#)
Fixing screw; for 209-120 mounting carrier



[Item No.: 209-123](#)
Mounting foot with screw; can be screwed on terminal blocks with fixing flange; 6.4 mm wide; gray



[Item No.: 209-120](#)
Mounting foot; can be snapped on terminal blocks with snap-in mounting foot; for mounting on relay-modules; 6.4 mm wide; gray

1.1.2 Marking
1.1.2.1 Marking strip




[Item No.: 210-834](#)
Marking strips; on reel; 5 mm wide; plain; Self-adhesive; white

Installation Notes
Installation



Place the inline splicing connector on the carrier in front of the mounting position.



Push the connector to the center position until it snaps into place.




Mounting carrier without strain relief – snapped onto DIN-rail



Various combinations of 1- to 5-connector mounting carriers are possible via side-by-side latching mechanism.

Strain relief



3-pole mounting carrier with strain relief