





Data Sheet | Item Number: 221-612

COMPACT Splicing Connector; for all conductor types; max. 6 mm²; 2-conductor;
with levers; transparent housing; Surrounding air temperature: max 85°C (T85); 6,00
mm²; transparent

<https://www.wago.com/221-612>

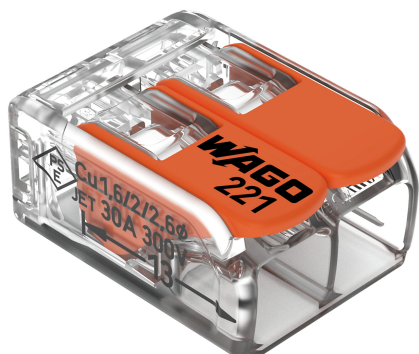

Color: ☐ transparent

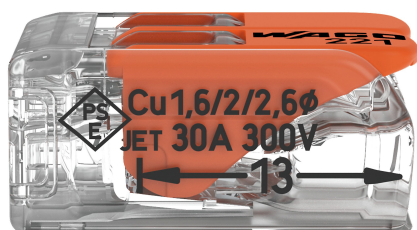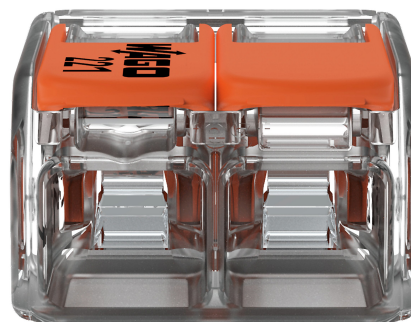

Dimensions in mm

Your benefits:

- Ease of use – pull the lever up, insert a conductor and push the lever back down
- Available as 2-, 3- and 5-wire connectors
- Easily terminate conductors from 0.5 to 6 mm²
- Connection of all conductor types
- Time savings for installers and device manufacturers
- Quickly install devices with higher power consumption
- Safely install long cable runs with larger conductor cross sections
- Mounting carrier for installation conforms to standards
- Custom carriers are possible

Notes	
Safety information 1	in grounded power lines

Electrical data			
Ratings per IEC/EN		Ratings per UL 1059	
Ratings per	EN 60664	Approvals per	UL 486C
Nominal voltage (II/2)	450 V	Rated voltage UL (Use Group C)	600 V
Rated surge voltage (II/2)	4 kV	Rated current UL (Use Group C)	30 A
Rated current	41 A		
Legend (ratings)	(II / 2) ≙ Overvoltage category II / Pollution degree 2		

Connection data			
Connection points	2	Connection 1	
Total number of potentials	1	Connection technology	CAGE CLAMP®
		Actuation type	Lever
		Connectable conductor materials	Copper
		Nominal cross-section	6 mm² / 10 AWG
		Solid conductor	0.5 ... 6 mm² / 20 ... 10 AWG
		Stranded conductor	0.5 ... 6 mm² / 20 ... 10 AWG
		Fine-stranded conductor	0.5 ... 6 mm² / 20 ... 10 AWG
		Strip length	12 ... 14 mm / 0.47 ... 0.55 inches
		Wiring direction	Side-entry wiring

Material Data	
Note (material data)	Information on material specifications can be found here
Color	transparent
Cover color	transparent
Insulation material	Polycarbonate (PC)
Flammability class per UL94	V2
Fire load	0.05 MJ
Actuator color	orange
Weight	3 g

Environmental requirements	
Ambient temperature (operation)	+85 °C
Continuous operating temperature	105 °C
Temperature marking per EN 60998	T85



Commercial data		
eCl@ss 10.0		27-14-11-04
eCl@ss 9.0		27-14-11-04
ETIM 8.0		EC000446
ETIM 7.0		EC000446
PU (SPU)		500 (50) pcs
Packaging type		Box
Country of origin		CH
GTIN		4055143704168
Customs tariff number		85369010000

Approvals / Certificates		
General approvals		
  		
Approval	Standard	Certificate Name
CB DEKRA Certification B.V.	IEC 60998	NL-81003
ENEC 05 DEKRA Certification B.V.	EN 60998	71-123784
UL_Listed_64KA UL International Germany GmbH	UL 467	E201573
UL UL International Germany GmbH	UL 486C	E69654
Approvals for marine applications		
  		
Approval	Standard	Certificate Name
ABS American Bureau of Ship- ping	EN 60998	18-HG1755093-PDA
DNV GL Det Norske Veritas, Ger- manischer Lloyd	EN 60998	TAE000015T
LR Lloyds Register	EN 60998	LR22207029TA

Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 221-612	

Documentation			
Bid Text			
221-612	19.02.2019	xml 3.47 KB	
221-612	23.01.2019	docx 15.62 KB	
ausschreiben.de 221-612			

CAD/CAE-Data



CAD data
2D/3D Models 221-612






CAE data
EPLAN Data Portal 221-612
ZUKEN Portal 221-612



Installation Notes

Conductor termination



Application

