

For Residential and Commercial Applications

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____

Representative _____

LEAD FREE*

Series LF26A, LF263A Small Pressure Regulators

Sizes: LF26A: 1/8" – 1/2"

LF263A: 1/4" – 1/2"

Series LF26A, LF263A Small Pressure Regulators are general purpose pressure regulators for water service. The LF26A, LF263A features Lead Free* construction to comply with Lead Free* installation requirements. These regulators are ideal for use in beverage dispensers, ice cube machines and other similar applications. Lead Free* small pressure regulators shall comply with state codes and standards, where applicable, requiring reduced lead content.

Features

- Rugged forged Lead Free* Brass body
- Tee handle adjustment
- Oversized orifice

Models

LF26A 2-way regulator

LF263A 3-way regulator

Materials

Body: Lead Free* Brass
 Spring Cage: Aluminum
 Disc: Buna-N stainless steel
 Diaphragm: Reinforced Buna-N

Pressure – Temperature

Temperature Range: 0°F – 140°F (-18°C – 60°C)

Maximum Working Pressure: 300psi (21 bar)

Reduced Pressure Range:

SUFFIX	RANGE		STD. SET AT	
	psi	bar	psi	bar
A	1 – 25	0.1 – 1.7	10	0.7
B	3 – 50	0.2 – 3.4	15	1.0
C	10 – 125	0.7 – 8.6	25	1.7
D	50 – 175	3.4 – 12.1	50	3.4


 LF26A
2-Way

 LF263A
3-Way

Options

- G Pressure gauge
 SS All stainless steel construction
 X Slotted adjusting screw

NOTICE


The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

NOTICE


Inquire with governing authorities for local installation requirements

*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

Capacity

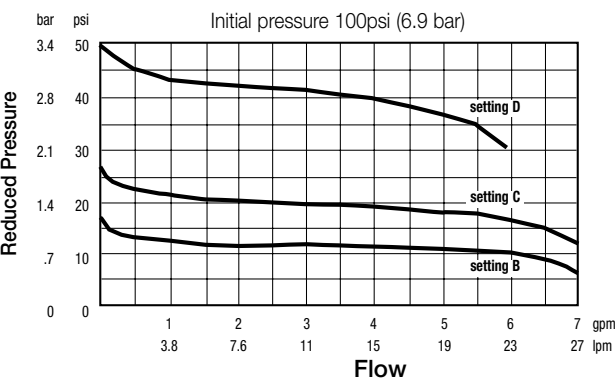

Approvals



Dimensions – Weights

MODEL	SIZE	DIMENSIONS				WEIGHT	
		A		C			
	<i>in.</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>lbs.</i>	<i>kgs</i>
LF26A	1⁄8	2 1⁄8	54	4 3⁄8	111	1	.45
LF26A/LF263A	1⁄4	2 1⁄8	54	4 3⁄8	111	1	.45
LF26A/LF263A	3⁄8	2 1⁄8	54	4 3⁄8	111	1	.45
LF26A/LF263A	1⁄2	2 1⁄8	54	4 3⁄8	111	1	.45

