

For Hydronic Heating Applications

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____

Representative _____

Series 2000

Two-Way Flow Checks

Sizes: $\frac{3}{4}$ "-3" (20-80mm)

Series 2000 Two-Way Flow Checks are designed to provide positive gravity shutoff when circulator is not running. These checks are easily opened for gravity circulation.

Models

2000-M5 – $\frac{3}{4}$ "-3" (20-80mm) horizontal and angle checks. Iron body construction. Sizes $\frac{3}{4}$ "-1 $\frac{1}{2}$ " (20-40mm) have female threaded connections. Sizes 2"-3" (50-80mm) have one flanged outlet x two female threaded connections. One connection can be used for the installation of an expansion tank when installed as an angle check.

2000S-M5 – $\frac{3}{4}$ "-1" (20-25mm) straight pattern. Bronze body construction, solder inlet and outlet connections.

Specifications

Flow checks shall be installed on forced hot water heating systems where indicated on the plans to provide positive gravity shutoff when circulator is not running. Checks shall be easily opened for gravity circulation. Threaded end connection checks shall have an iron body and solder end connection checks shall have a bronze body. Check shall be a Watts Regulator Company Series 2000.

Pressure – Temperature

Sizes $\frac{3}{4}$ "-1 $\frac{1}{4}$ " (20-32mm)

Maximum Working Pressure – 50psi (344.8 kPa)

Temperature Range 33°F - 250°F (5°C - 121°C)

Sizes 1 $\frac{1}{2}$ "-3" (40-80mm)

Maximum Working Pressure – 125psi (8.6 bars)

Temperature Range 33°F - 250°F (5°C - 121°C)

Materials

Model 2000-M5

Body: Iron

Seat: Bronze

Center Guide: Brass

Model 2000S-M5

Body: Bronze

Seat: Bronze

Center Guide: Brass



2000-M5
 $\frac{3}{4}$ "-1 $\frac{1}{2}$ "



2000-M5
2", 2 $\frac{1}{2}$ ", 3"




2000S-M5
 $\frac{3}{4}$ "-1"

WATTS®
REGULATOR

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

Dimensions-Weights

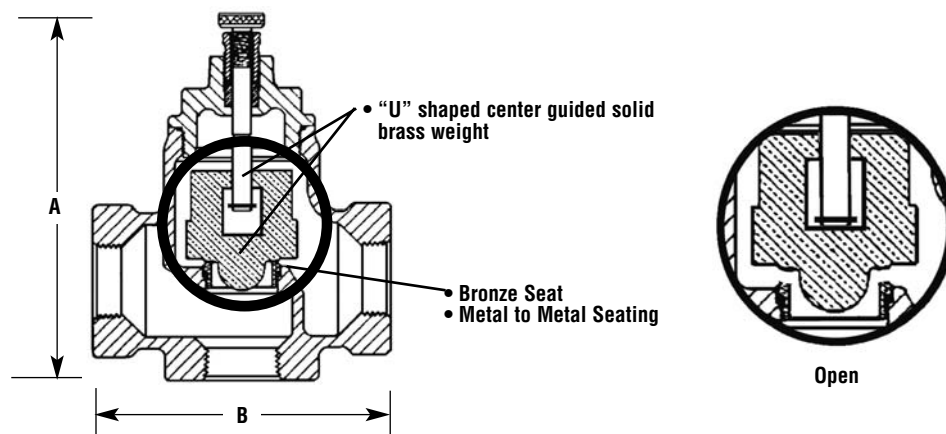

MODEL	SIZE (DN)		DIMENSIONS						WEIGHT	
	in.	mm	A		B		Max. Pressure		lbs.	kgs.
			in.	mm	in.	mm	psi	kPa/bars		
2000-M5	¾	20	5	127	4 1/8	105	50	345 kPa	3	1.36
2000-M5	1	25	5	127	4 1/8	105	50	345 kPa	3	1.36
2000-M5	1 ¼	32	5 5/8	143	4 ¾	121	50	345 kPa	4 ½	2.04
2000-M5	1 ½	40	7 ¼	184	5	127	125	8.61 bars	8	3.63
2000-M5	2	50	7 ½	191	6 7/8	175	125	8.61 bars	12	5.44
2000-M5	2 ½	65	9 5/8	245	8 ¾	213	125	8.61 bars	22	9.98
2000-M5	3	80	10	250	9	229	125	8.61 bars	24	10.9
2000S-M5	¾	20	3 5/8	92	3	76	50	345 kPa	1	.45
2000S-M5	1	25	3 7/8	98	3 ¾	95	50	345 kPa	2	.91

REPAIR KITS				
Model	Size		Ordering Code	
	in.	mm		
2000-M5	¾ and 1	20 and 25	0856765	
2000-M5	1 ¼	32	0856766	
2000S-M5	¾	20	0856767	
2000S-M5	1	25	0856768	



USA: 815 Chestnut St., No. Andover, MA 01845-6098; www.wattsreg.com

Canada: 5435 North Service Rd., Burlington, ONT. L7L 5H7; www.wattscda.com

© Watts Regulator Company, 2003

Printed in U.S.A.