




HY-725
Tag: _____

**Non-Freeze Wall Hydrant with
NB Box, Integral Vacuum Breaker**


SPECIFICATION: Watts Drainage HY-725 concealed non-freeze key operated wall hydrant with nickel bronze box and door, chrome plated hydrant face, integral vacuum breaker, 3/4"(19) hose connection, 3/4"(19) female x 1"(25) male pipe connection, all bronze head, seat casting and internal working parts, bronze wall casing, and loose key. Complies with ASSE 1019-2004, UPC/IAMPO Listed. Max. operating pressure 125 psi.

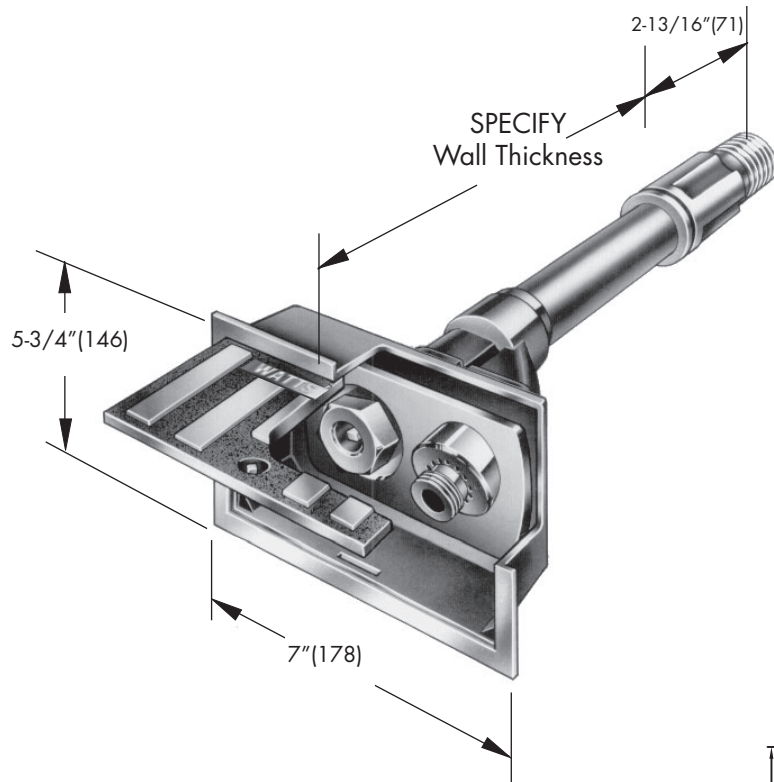

Recommended Wall Opening:
5-1/4" x 6-1/4" (133 x 158)

Wall Thickness (Select One)		
Suffix	Description	
-6	7-1/8"(181) Thick	☐
-8	8"(203) Thick	☐
-10	10"(254) Thick	☐
-12	12"(305) Thick	☐
-14	14"(356) Thick	☐
-16	16"(406) Thick	☐
-18	18"(457) Thick	☐
-20	20"(508) Thick	☐
-22	22"(559) Thick	☐
-24	24"(610) Thick	☐
Other	Specify _____	☐

Options (Select One or More)		
Suffix	Description	
-K	Cylinder Lock	☐
-.88	Wall Clamp	☐
-3	Stainless Steel Box	☐
-CIA	Complete Internal Assembly (Repair Kit)	☐
-R	Round Stainless Steel Box	☐
-US	Buy American Compliant	☐

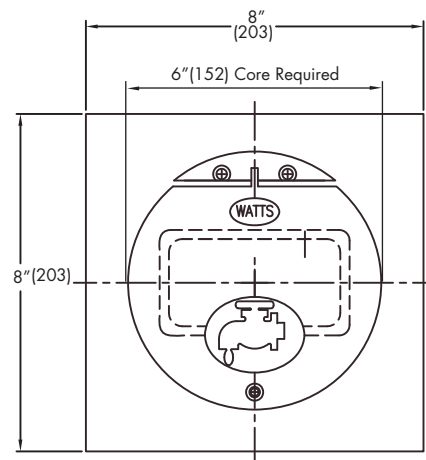

-R Round Box for Tilt-Up Construction

Job Name _____

Contractor _____

Job Location _____

Contractor's P.O. No. _____

Engineer _____

Representative _____

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

USA: Tel: (800) 338-2581 • Fax: (828) 248-3929 • Watts.com

Canada: Tel: (905) 332-4090 • Fax: (905) 332-7068 • Watts.ca

Latin America: Tel: (52) 81-1001-8600 • Fax: (52) 81-8000-7091 • Watts.com

ES-WD-HY-725-USA 1510



A Watts Water Technologies Company

© 2015 Watts