

Full Port Forged Brass Ball Valves

600 WOG / 150 WSP
(400 WOG / 125 WSP for 2½" - 4")
ISO 9001

5170 Series - CxC


TEMP °F	½" - 2" PSI	2½- 4" PSI
100	600	400
150	490	327
200	479	313
250	470	293
300	N/A	N/A
350	N/A	N/A
366	N/A	N/A



5170 Series - CxC

ITEM #	SIZE	CTN/CASE	A	B	C	D	C _v
W/ CHROME PLATED LEVER HANDLE							
51702	1/2	10/100	1/2	2 5/16	2 1/8	3 1/2	11.5
51703	3/4	10/60	3/4	2 7/8	2 1/4	3 3/4	27.0
51704	1	6/48	1	3 1/2	2 5/8	4 1/2	49.3
51705	1 1/4	4/32	1 1/4	4 1/4	3	4 1/2	114.0
51706	1 1/2	2/24	1 1/2	4 5/8	3 5/8	5 1/2	161.3
51707	2	2/16	2	5 3/8	4	5 1/2	248.6
51708	2 1/2	2/6	2 1/2	6 1/4	5	9	262.3
51709	3	1/3	3	7 1/4	5 1/2	9	418.2
51710	4	1/2	4	9 1/4	6	9 1/2	567.8
W/ 304 STAINLESS STEEL HANDLE							
51702SSL	1/2	10/100	1/2	2 5/16	2 1/8	3 1/2	11.5
51703SSL	3/4	10/60	3/4	2 7/8	2 1/4	3 3/4	27.0
51704SSL	1	6/48	1	3 1/2	2 5/8	4 1/2	49.3
51705SSL	1 1/4	4/32	1 1/4	4 1/4	3	4 1/2	114.0
51706SSL	1 1/2	2/24	1 1/2	4 5/8	3 5/8	5 1/2	161.3
51707SSL	2	2/16	2	5 3/8	4	5 1/2	248.6
W/ WING STYLE "T" HANDLE*							
51702T	1/2	10/100	1/2	2 5/16	2 1/8	1 3/4	11.5
51703T	3/4	10/60	3/4	2 7/8	2 1/4	1 3/4	27.0
51704T	1	6/48	1	3 1/2	2 5/8	1 3/4	49.3
W/ 304 STAINLESS STEEL WING STYLE "T" HANDLE							
51702SSW	1/2	10/100	1/2	2 5/16	2 1/8	1 3/4	11.5
51703SSW	3/4	10/60	3/4	2 7/8	2 1/4	1 3/4	27.5
51704SSW	1	6/48	1	3 1/2	2 5/8	1 3/4	49.3

NO.	DESCRIPTION	MATERIAL
1	BODY	BRASS
2	END CAP	BRASS
3	SEAT	PTFE
4	BALL	BRASS HCP
5	STEM	BRASS
6	STEM SEAL	PTFE
7	PACKING GLAND	BRASS
8	LEVER HANDLE	STEEL CP (5170) / STAINLESS STEEL (5170SSL)
9	HANDLE NUT	STEEL CP (5170) / STAINLESS STEEL (5170SSL)
10	HANDLE JACKET	VINYL
11	WING STYLE "T" HANDLE	STAINLESS STEEL (5170SSW) / STEEL CP (5170T)
12	HANDLE NUT	STAINLESS STEEL (5170SSW) / STEEL CP (5170T)

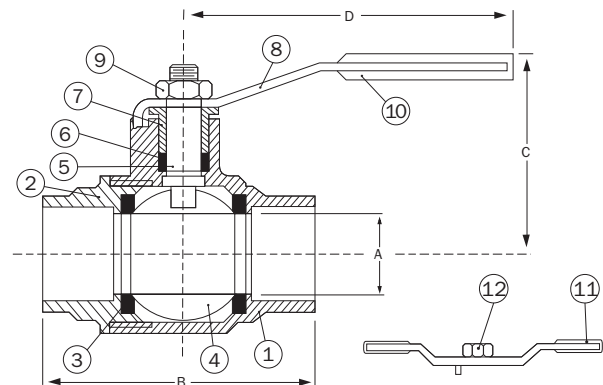

Specifications: Designed for residential, commercial or industrial use with water, oil or gas. This approved Webstone valve is actuated by a blowout proof stem and features an adjustable packing gland. Solder joint temperature ratings are per ASME B16.18 Annex A for 95-5 solder. Other solder materials have lower pressure/temperature limits. Do not silver braze or overheat valves when soldering.*5170T valves are not manufactured in an ISO facility.

THIS SPACE FOR DESIGNER / ENGINEER APPROVAL

Job/Customer _____	Date _____	Contractor _____
Model Specified _____	Qty _____	Approved By _____
Designer/Engineer _____	Date _____	Contractor's PO# _____
Submitted by _____	Date _____	Other _____