

# Full Port Forged Brass Ball Valves

w/ Cap, Strap & Reversible Handle

600 WOG / 150 WSP  
ISO 9001

## 4031 Series - FIP x Hose

## 5031 Series - SWT x Hose



TEMP °F	PSI
100	600
150	490
200	470
250	439
300	411
350	294
366	N/A



TEMP °F	PSI
100	600
150	485
200	395
250	210
300	N/A
350	N/A
366	N/A


### 4031 Series - IPS

ITEM #	SIZE	CTN/CASE	A	B	C	D	C <sub>v</sub>
40312	1/2" x 3/4"	10/60	9/16	2 3/8	1 7/8	3 1/2	11.5
40313	3/4" x 3/4"	10/60	11/16	2 9/16	1 7/8	4 1/16	27.0

### 5031 Series - CxC

ITEM #	SIZE	CTN/CASE	A	B	C	D	C <sub>v</sub>
50312	1/2" x 3/4"	10/100	1/2	2 1/2	1 7/8	3 9/16	11.5
50313	3/4" x 3/4"	10/60	3/4	2 9/16	2 1/8	4 5/16	27.1

NO.	DESCRIPTION	MATERIAL
1	BODY	BRASS
2	END CAP	BRASS
3	SEAT	PTFE
4	BALL	BRASS HCP
5	STEM	BRASS
6	STEM SEAL	PTFE
7	PACKING GLAND	BRASS
8	HANDLE	STEEL CP
9	HANDLE NUT	STEEL CP
10	HANDLE JACKET	VINYL
11	CAP & STRAP	BRASS W/ NBR HOSE WASHER

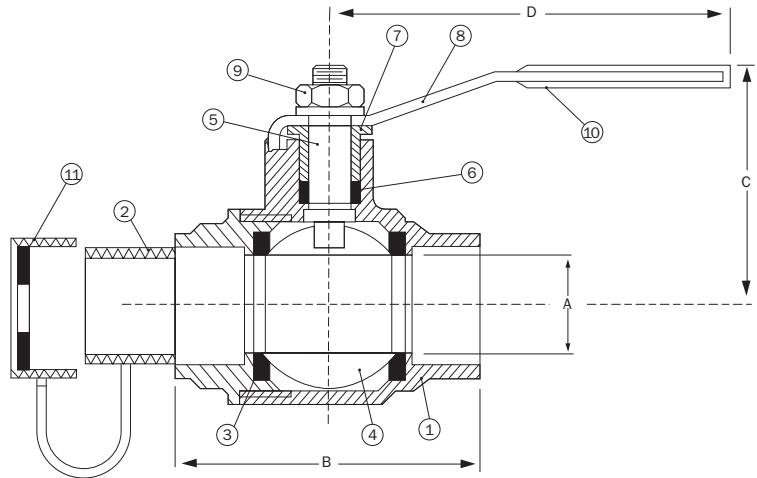

Specifications: Designed for residential, commercial or industrial use with water, oil or gas. This approved Webstone valve is actuated by a blowout proof stem and features an adjustable packing gland. Threaded ends comply with ANSI B1.20.7. Solder joint temperature ratings are per ASME B16.18 Annex A for 95-5 solder. Other solder materials have lower pressure/temperature limits. Do not silver braze or overheat valves when soldering. Hose ends comply with ANSI B1.20.7.

### THIS SPACE FOR DESIGNER / ENGINEER APPROVAL

Job/Customer _____	Date _____	Contractor _____
Model Specified _____	Qty _____	Approved By _____
Designer/Engineer _____	Date _____	Contractor's PO# _____
Submitted by _____	Date _____	Other _____