



THERMOSTATIC MIXING VALVES RIGHT TEMPERATURE RIGHT CONNECTION

THREE TEMPERATURE RANGES Provide versatility to accommodate different application requirements

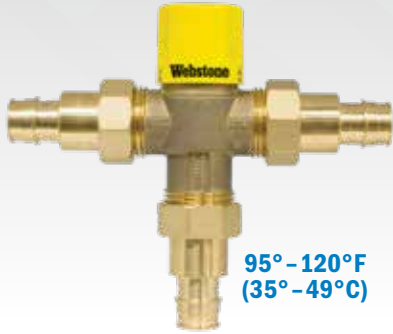

APPLICATION	WATER DISTRIBUTION SYSTEMS Certified to NSF/ANSI 61 & 372, Body (H-7000W) Certified to ASSE 1017, CSA B125.3				POINT OF USE		
	TEMP RANGE	95° - 120°F (35° - 49°C)	95° - 131°F (35° - 55°C)	95° - 131°F (35° - 55°C)	104° - 176°F (40° - 80°C)	SINGLE OR MULTI FIXTURE Certified to NSF/ANSI 61 & 372, ASSE 1070, ASSE 1017, CSA B125.3	SINGLE ONLY Certified to NSF/ANSI 61 & 372, ASSE 1070
F1807 PEX	7120W-CAN	7120W	7120W	7120W	-	-	-
F1960 PEX	7320W-CE-CAN	7320W-CE	7320W-CE	7320W-CE	-	-	-
PRESS	7820W-CAN	7820W	7820W	7820W	-	-	-
PUSH	7620W-CAN	7620W	7620W	-	-	-	-
FIP	7220W-CAN	7220W	7220W	7220W	-	-	-
MIP	7420W-CAN	7420W	7420W	7420W	7420W-CAN	7420W	-
SWT	7520W-CAN	7520W	7520W	7520W	7520W-CAN	7520W	-
COMPRESSION	-	-	-	-	-	-	7720W

EIGHT END CONNECTIONS Combine with a wide range of accessories for most installation needs

F1807 PEX

F1960 PEX

PRO-CONNECT PRESS

PRO-CONNECT PUSH

FIP

MIP

SWT

COMPRESSION



THERMOSTATIC MIXING VALVE W/ INTEGRAL CHECK VALVES
Forged Brass Valve w/ Dezincification Resistant Brass Fittings & G1 Union Connections - Outlet Temperature Range 95° - 120°F

LEAD-FREE BRASS

SIZE	ITEM #	CTN/CASE
ASTM F1807 PEX		150 PSI
1/2"	H-71202W-CAN*	1/10
3/4"	H-71203W-CAN*	1/10
ASTM F1960 PEX		150 PSI
1/2"	H-73202W-CE-CAN	1/10
3/4"	H-73203W-CE-CAN	1/10
Press		150 PSI
1/2"	H-78202W-CAN	1/10
3/4"	H-78203W-CAN	1/10
1"	H-78204W-CAN	1/10
Push		150 PSI
1/2"	H-76202W-CAN†	1/10
3/4"	H-76203W-CAN†	1/10
FIP		150 PSI
1/2"	H-72202W-CAN	1/10
3/4"	H-72203W-CAN	1/10
1"	H-72204W-CAN	1/10
MIP		150 PSI
1/2"	H-74202W-CAN	1/10
3/4"	H-74203W-CAN	1/10
1"	H-74204W-CAN	1/10
SWT		150 PSI
1/2"	H-75202W-CAN	1/10
3/4"	H-75203W-CAN	1/10
1"	H-75204W-CAN	1/10

*NEW ITEM NUMBER - FORMERLY H-7320W-CAN SERIES
†PUSH FITTINGS CERTIFIED TO ASSE 1061

THERMOSTATIC MIXING VALVE W/ INTEGRAL CHECK VALVES
Forged Brass Valve w/ Dezincification Resistant Brass Fittings, w/ Temperature Locking Handle & G1 Union Connections - Outlet Temperature Range 95° - 131°F

LEAD-FREE BRASS

SIZE	ITEM #	CTN/CASE
ASTM F1807 PEX		150 PSI
1/2"	H-71202W*	1/10
3/4"	H-71203W*	1/10
ASTM F1960 PEX		150 PSI
1/2"	H-73202W-CE	1/10
3/4"	H-73203W-CE	1/10
Press		150 PSI
1/2"	H-78202W	1/10
3/4"	H-78203W	1/10
1"	H-78204W	1/10
Push		150 PSI
1/2"	H-76202W†	1/10
3/4"	H-76203W†	1/10
FIP		150 PSI
1/2"	H-72202W	1/10
3/4"	H-72203W	1/10
1"	H-72204W	1/10
MIP		150 PSI
1/2"	H-74202W	1/10
3/4"	H-74203W	1/10
1"	H-74204W	1/10
SWT		150 PSI
1/2"	H-75202W	1/10
3/4"	H-75203W	1/10
1"	H-75204W	1/10

*NEW ITEM NUMBER - FORMERLY H-7320W SERIES
†PUSH FITTINGS CERTIFIED TO ASSE 1061

THERMOSTATIC MIXING VALVE W/ INTEGRAL CHECK VALVES
Forged Brass Valve w/ Temperature Locking Handle & G1 Union Connections - Outlet Temperature Range 104° - 176°F

LEAD-FREE BRASS

SIZE	ITEM #	CTN/CASE
ASTM F1807 PEX		150 PSI
1/2"	H-71272W	1/10
3/4"	H-71273W	1/10
ASTM F1960 PEX		150 PSI
1/2"	H-73272W	1/10
3/4"	H-73273W	1/10
Press		150 PSI
1/2"	H-78272W	1/10
3/4"	H-78273W	1/10
1"	H-78274W	1/10
FIP		150 PSI
1/2"	H-72272W	1/10
3/4"	H-72273W	1/10
1"	H-72274W	1/10
MIP		150 PSI
1/2"	H-74272W	1/10
3/4"	H-74273W	1/10
1"	H-74274W	1/10
SWT		150 PSI
1/2"	H-75272W	1/10
3/4"	H-75273W	1/10
1"	H-75274W	1/10

- Ultra-compact 2½" x 3¼" body is ideal for discrete under sink installations
- Cold water by-pass models include elbow and tee

CHROME PLATED FORGED DZR BRASS THERMOSTATIC MIXING VALVE
Outlet Temperature Range 95° - 120°F

LEAD-FREE BRASS

SIZE	ITEM #	CTN/CASE
Compression		150 PSI
3/8"	H-77201W	10/100
W/ 20-220°F TEMPERATURE GAUGE		
3/8"	H-77201W-TG	1/10
W/ COLD WATER BY-PASS FITTINGS		
3/8"	H-77211W	1/10
W/ COLD WATER BY-PASS FITTINGS & 20-220°F TEMPERATURE GAUGE		
3/8"	H-77211W-TG	1/10


Webstone
a brand of **NIBCO**

VALVE INNOVATION
GUARANTEED FOR LIFE
CONDITIONS APPLY. SEE WEBSTONEVALVES.COM FOR FULL DETAILS.
800-225-9529 • webstonevalves.com

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov
LEAD-FREE: Weighted average lead content < 0.25%


TMV APPLICATIONS

WATER DISTRIBUTION SYSTEMS

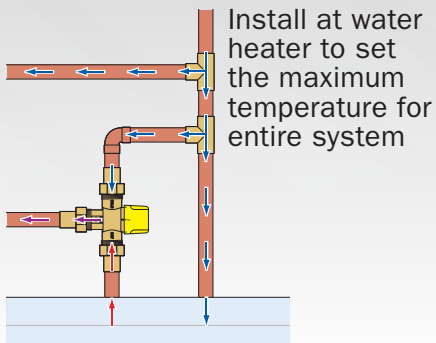



LOW TEMP HYDRONIC

Set a maximum temperature up to 131°F for radiant floor or other low temp heating application

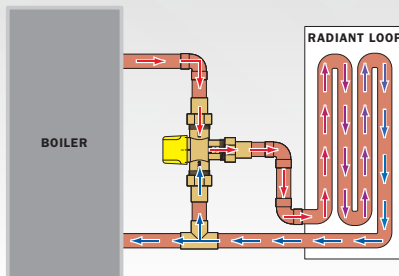


HIGH TEMP HYDRONIC

Set a maximum temperature up to 176°F for radiant floor, baseboard heat, radiators, or other high temp heating application

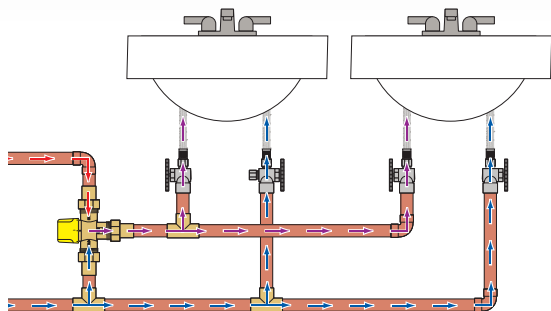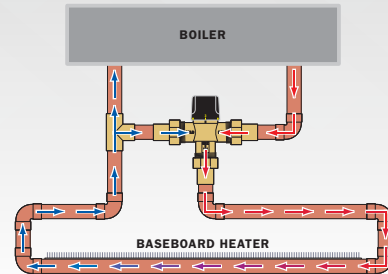

POINT OF USE - MULTI FIXTURE

Set the maximum temperature for a group of fixtures



POINT OF USE - SINGLE FIXTURE

Set the maximum temperature of each fixture individually

TMV ACCESSORIES



ISOLATION BALL VALVE

Full Port Forged Brass Valve

LEAD-FREE BRASS

Certified to NSF/ANSI 61 & 372

SIZE	ITEM #	CTN/CASE
G1 Union x G1 Thread		150 PSI
YELLOW HANDLE		
1"	H-7-G134WY	10/60
RED HANDLE W/ INTEGRAL CHECK VALVE		
1"	H-7-G234WR	10/60
BLUE HANDLE W/ INTEGRAL CHECK VALVE		
1"	H-7-G234WB	10/60



ANGLED ISOLATION BALL VALVE

Full Port Forged DZR Brass Valve

LEAD-FREE BRASS

Certified to NSF/ANSI 61 & 372

SIZE	ITEM #	CTN/CASE
G1 Union x G1 Thread		150 PSI
YELLOW HANDLE		
1"	H-7-G134WY-A	10/60
RED HANDLE W/ INTEGRAL CHECK VALVE		
1"	H-7-G234WR-A	10/60
BLUE HANDLE W/ INTEGRAL CHECK VALVE		
1"	H-7-G234WB-A	10/60



THE ISOLATOR W/ ROTATING FLANGE

Full Port Forged Brass Uni-Flange Ball Valve - w/ Detachable Rotating Flange, Adjustable Packing Gland, Nuts & Bolts

LEAD-FREE BRASS

Certified to NSF/ANSI 61 & 372

SIZE	ITEM#	HV ITEM#	CTN/CASE
G1 Union x Rotating Flange			600 CWP
1"	H-G1404W	H-G1404WHV	1/20
W/ MULTI-FUNCTION HI-FLOW HOSE DRAIN			
1"	H-G1414W	H-G1414WHV	1/20

HV ITEMS FIT HIGH VELOCITY & STANDARD SIZE PUMPS.

TEMPERATURE GAUGE

w/ Integrated Chrome Plated Forged DZR Brass Fitting - 1" Dial - Temperature Range 20 - 220° F

LEAD-FREE BRASS

Certified to NSF/ANSI 61 & 372

SIZE	ITEM #	CTN/CASE
Compression		150 PSI
3/8"	H-33000W	10/100



DUAL SCALE TEMPERATURE GAUGE

w/ Integrated Forged Brass Fitting - 1 1/2" Dial - Temperature Range 32° - 248° F

LEAD-FREE BRASS

Certified to NSF/ANSI 61 & 372

SIZE	ITEM #	CTN/CASE
G1 Union x G1 Thread		150 PSI
1"	H-32000W	10/100



G1 UNION ELBOW

Forged DZR Brass Fitting

LEAD-FREE BRASS

Certified to NSF/ANSI 61 & 372

SIZE	ITEM #	CTN/CASE
G1 Union x G1 Thread		150 PSI
1"	H-7-G144W-A	10/60



ISOLATION KITS

- Isolates TMV body for service
- Versatile combinations cover most TMV installations
- Easily re-arrange color-coded handles/check valves to valve bodies in accordance with system needs
- Compatible with G1 Union Connections

	ISOLATION BALL VALVE			ANGLED ISOLATION BALL VALVE			The ISOLATOR [®] UNI-FLANGE BALL VALVE	
	Yellow Handle	Red Handle w/ Integral Check Valve	Blue Handle w/ Integral Check Valve	Yellow Handle	Red Handle w/ Integral Check Valve	Blue Handle w/ Integral Check Valve	w/ Rotating Flange	w/ Rotating Flange & Multi-Function Drain
H-7-G234W-KITA								
H-7-G234W-A-KITA		✓	✓					
H-7-G234W-KITB	✓	✓	✓					
H-7-G234W-A-KITB	✓	✓	✓	✓	✓	✓		
H-7-G234W-KITD		✓	✓	✓	✓	✓		
H-G1404W-KITB		✓	✓				✓	
H-G1404W-A-KITB		✓	✓				✓	
H-G1414W-KITB		✓	✓					✓
H-G1414W-A-KITB		✓	✓					✓