

# F1960 & F1807 PEX PRODUCTS

NOW IN SIZES UP TO 2"



F1960 COLD EXPANSION

F1807 CRIMP OR CLAMP

**FULL FLOW FORGED DZR BRASS BALL VALVE**  
w/ Stainless Steel Wing Style "T" Handle  
& Adjustable Packing Gland

**LEAD-FREE BRASS**

Certified to NSF/ANSI 61 & 372  
NSF/ANSI 14

SIZE	ITEM#	CTN/CASE	CASE WT
<b>ASTM F1960 PEX</b> 400 PSI CWP Max/250°F Max			
1/2"	H-31702WSSW	10/80	27
3/4"	H-31703WSSW	10/60	30
1"	H-31704WSSW	6/36	33
1 1/4"	H-31705WSSW	5/25	33
1 1/2"	H-31706WSSW	5/25	49
2"	H-31707WSSW	2/12	38
<b>ASTM F1807 PEX</b> 400 PSI CWP Max/250°F Max			
1/2"	H-11702WSSW	10/80	23
3/4"	H-11703WSSW	10/60	26
1"	H-11704WSSW	6/36	26



**THE ISOLATOR W/ ROTATING FLANGE**

Full Port Forged DZR Brass Uni-Flange Ball Valve w/ Detachable Rotating Flange, Adjustable Packing Gland, Nuts & Bolts

**LEAD-FREE BRASS**

Certified to NSF/ANSI 61 & 372  
NSF/ANSI 14

SIZE	ITEM#	HV ITEM#	CTN/CASE	CASE WT
<b>ASTM F1960 PEX × Rotating Flange</b> 400 PSI CWP Max				
3/4"	H-31403W	H-31403WHV	1/20	27
1"	H-31404W	H-31404WHV	1/20	27
<b>ASTM F1807 PEX × Rotating Flange</b> 400 PSI CWP Max				
3/4"	H-11403W	H-11403WHV	1/20	27
1"	H-11404W	H-11404WHV	1/20	29
<b>W/ MULTI-FUNCTION HI-FLOW HOSE DRAIN</b>				
<b>ASTM F1960 PEX × Rotating Flange</b> 400 PSI CWP Max				
3/4"	H-31413W	H-31413WHV	1/20	27
1"	H-31414W	H-31414WHV	1/20	27
<b>ASTM F1807 PEX × Rotating Flange</b> 400 PSI CWP Max				
3/4"	H-11413W	H-11413WHV	1/20	27
1"	H-11414W	H-11414WHV	1/20	27

HV ITEMS FIT HIGH VELOCITY & STANDARD SIZE PUMPS.

**The ISOLATOR**  
UNI-FLANGE BALL VALVE





**PRO-PAL BALL DRAIN**

Full Port Forged DZR Brass Ball Valve w/ Hi-Flow Hose Drain, Reversible Handle & Adjustable Packing Glands

**LEAD-FREE BRASS**

Certified to NSF/ANSI 61 & 372 NSF/ANSI 14

SIZE	ITEM#	CTN/CASE	CASE WT
<b>ASTM F1960 PEX</b> 400 PSI CWP Max/200°F Max			
1/2"	H-30612W	4/40	35
3/4"	H-30613W	4/32	37
1"	H-30614W	2/20	32
1 1/4"	H-30615W	2/16	40
1 1/2"	H-30616W	1/8	28
2"	H-30617W	1/6	33
<b>ASTM F1807 PEX</b> 400 PSI CWP Max/200°F Max			
1/2"	H-10612W	4/40	34
3/4"	H-10613W	4/32	35
1"	H-10614W	2/20	31
1 1/4"	H-10615W	2/16	37
1 1/2"	H-10616W	1/8	26
2"	H-10617W	1/6	30

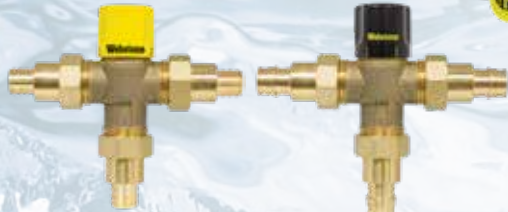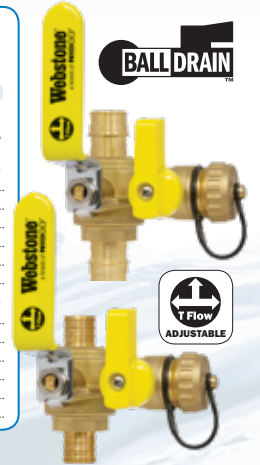


**THERMOSTATIC MIXING VALVE W/ INTEGRAL CHECK VALVES**

Forged Brass Valve w/ DZR Brass Fittings, Temperature Locking Handle\* & G1 Union Connections

See page 4 for application & certification information

SIZE	ITEM#	CTN/CASE	CASE WT
<b>OUTLET TEMPERATURE RANGE 95°- 120°F</b>			
<b>ASTM F1960 PEX</b> 150 PSI/185°F Max			
1/2"	H-73202W-CE-CAN	1/10	18
3/4"	H-73203W-CE-CAN	1/10	18
<b>ASTM F1807 PEX</b> 150 PSI/185°F Max			
1/2"	H-71202W-CAN	1/10	18
3/4"	H-71203W-CAN	1/10	18
<b>OUTLET TEMPERATURE RANGE 95°- 131°F</b>			
<b>ASTM F1960 PEX</b> 150 PSI/185°F Max			
1/2"	H-73202W-CE	1/10	18
3/4"	H-73203W-CE	1/10	18
<b>ASTM F1807 PEX</b> 150 PSI/185°F Max			
1/2"	H-71202W	1/10	18
3/4"	H-71203W	1/10	18
<b>OUTLET TEMPERATURE RANGE 104°- 176°F</b>			
<b>ASTM F1960 PEX</b> 150 PSI/203°F Max			
1/2"	H-73272W	1/10	18
3/4"	H-73273W	1/10	18
<b>ASTM F1807 PEX</b> 150 PSI/203°F Max			
1/2"	H-71272W	1/10	18
3/4"	H-71273W	1/10	18

\*TEMPERATURE LOCKING HANDLE NOT AVAILABLE ON -CAN ITEMS

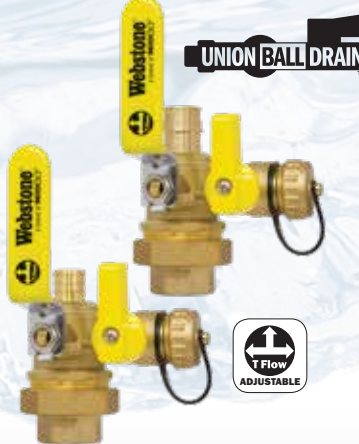

**PRO-PAL UNION BALL DRAIN**

Full Port Forged DZR Brass Ball Valve w/ Single Union End, Hi-Flow Hose Drain, Reversible Handle & Adjustable Packing Glands

**LEAD-FREE BRASS**

Certified to NSF/ANSI 61 & 372 NSF/ANSI 14

SIZE	ITEM#	CTN/CASE	CASE WT
<b>FIP Union × ASTM F1960 PEX</b> 250 PSI CWP Max/200°F Max			
1/2"	H-30432W	4/16	22
3/4"	H-30433W	4/16	27
1"	H-30434W	2/16	36
1 1/4"	H-30435W	2/8	27
1 1/2"	H-30436W	1/8	39
2"	H-30437W	1/4	29
<b>FIP Union × ASTM F1807 PEX</b> 250 PSI CWP Max/200°F Max			
1/2"	H-10432W	4/16	22
3/4"	H-10433W	4/16	27
1"	H-10434W	2/16	35
1 1/4"	H-10435W	2/8	26
1 1/2"	H-10436W	1/8	38
2"	H-10437W	1/4	28

**PRO-PAL UNION BALL**

Full Port Forged DZR Brass Ball Valve w/ Single Union End & Adjustable Packing Gland

**LEAD-FREE BRASS**

Certified to NSF/ANSI 61 & 372 NSF/ANSI 14

SIZE	ITEM#	CTN/CASE	CASE WT
<b>FIP Union × ASTM F1960 PEX</b> 250 PSI CWP Max/200°F Max			
1/2"	H-30422W	5/40	33
3/4"	H-30423W	4/32	40
1"	H-30424W	4/20	36
<b>FIP Union × ASTM F1807 PEX</b> 250 PSI CWP Max/200°F Max			
1/2"	H-10422W	5/40	33
3/4"	H-10423W	4/32	40
1"	H-10424W	4/20	36



**FULL FLOW FORGED NICKEL-PLATED BRASS SILCOCK**

1/4 Turn Action w/ Stainless Steel Lever Handle

**LEAD-FREE BRASS**

SIZE	ITEM#	CTN/CASE	CASE WT
<b>ASTM F1960 PEX Flange × MIP Hose</b> 125 PSI CWP MAX			
1/2"	H-33202WSSL	12/72	58



**CHROME-PLATED EXTRUDED BRASS MINI BALL VALVE**

Hex Body

**STANDARD BRASS**

SIZE	ITEM#	CTN/CASE	CASE WT
<b>ASTM F1807 PEX</b> 110 PSI CWP Max NON-SHOCK			
1/2"	H-40782	30/300	61

