


THERMOSTATIC MIXING VALVES

RIGHT TEMPERATURE RIGHT CONNECTION


THREE TEMPERATURE RANGES

Provide versatility to accommodate different application requirements

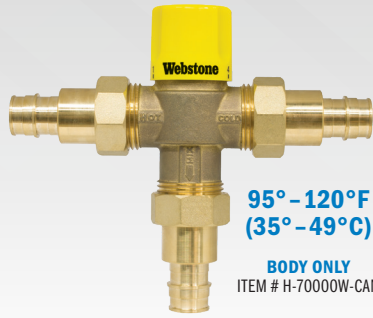


95° - 120°F
(35° - 49°C)

BODY ONLY
ITEM # H-70000W-CAN



95° - 131°F
(35° - 55°C)


BODY ONLY
ITEM # H-70000W

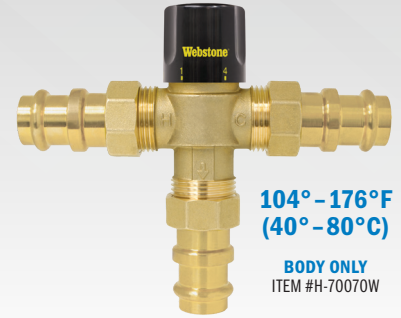

104° - 176°F
(40° - 80°C)

BODY ONLY
ITEM #H-70070W

APPLICATION	WATER DISTRIBUTION SYSTEMS		LOW TEMP HYDRONIC	HIGH TEMP HYDRONIC	POINT OF USE		
	Certified to NSF/ANSI 61 & 372 ASSE 1017 CSA B125.3 (ASSE & CSA for body H-70000W)				Certified to NSF/ANSI 61 & 372 ASSE 1017, 1070 CSA B125.3		SINGLE ONLY
TEMP RANGE	95° - 120°F (35° - 49°C)	95° - 131°F (35° - 55°C)	95° - 131°F (35° - 55°C)	104° - 176°F (40° - 80°C)	95° - 120°F (35° - 49°C)	95° - 131°F (35° - 55°C)	95° - 120°F (35° - 49°C)
F1807 PEX	7120W-CAN	7120W	7120W	7127W	-	-	-
F1960 PEX	7320W-CE-CAN	7320W-CE	7320W-CE	7327W	-	-	-
PRESS	7820W-CAN	7820W	7820W	7827W	-	-	-
PUSH	7620W-CAN	7620W	7620W	-	-	-	-
FIP	7220W-CAN	7220W	7220W	7227W	-	-	-
MIP	7420W-CAN	7420W	7420W	7427W	7420W-CAN	7420W	-
SWT	7520W-CAN	7520W	7520W	7527W	7520W-CAN	7520W	-
COMPRESSION	-	-	-	-	-	-	7720W

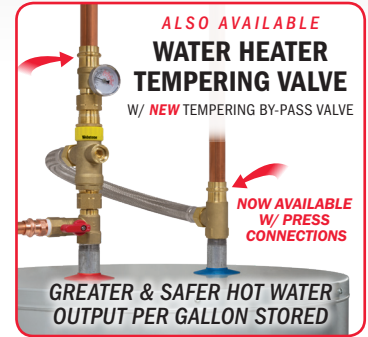

EIGHT END CONNECTIONS Combine with a wide range of accessories for most installation needs

F1807 PEX



FITTING ONLY
1/2" H-7-1102W WP
3/4" H-7-1103W WP
W/ CHECK
1/2" H-7-1202W WP
3/4" H-7-1203W WP

F1960 PEX



FITTING ONLY
1/2" H-7-3102W WP
3/4" H-7-3103W WP
W/ CHECK
1/2" H-7-3202W WP
3/4" H-7-3203W WP

PRO-CONNECT PRESS



FITTING ONLY
1/2" H-7-8102W WP
3/4" H-7-8103W WP
1" H-7-8104W WP
W/ CHECK
1/2" H-7-8202W WP
3/4" H-7-8203W WP
1" H-7-8204W WP

PRO-CONNECT PUSH



FITTING ONLY
1/2" H-7-6102W WP
3/4" H-7-6103W WP
W/ CHECK
1/2" H-7-6202W WP
3/4" H-7-6203W WP

FIP



FITTING ONLY
1/2" H-7-2102W WP
3/4" H-7-2103W WP
1" H-7-2104W WP
W/ CHECK
1/2" H-7-2202W WP
3/4" H-7-2203W WP
1" H-7-2204W WP

MIP



FITTING ONLY
1/2" H-7-4102W WP
3/4" H-7-4103W WP
1" H-7-4104W WP
W/ CHECK
1/2" H-7-4202W WP
3/4" H-7-4203W WP
1" H-7-4204W WP

SWT



FITTING ONLY
1/2" H-7-5102W WP
3/4" H-7-5103W WP
1" H-7-5104W WP
W/ CHECK
1/2" H-7-5202W WP
3/4" H-7-5203W WP
1" H-7-5204W WP

COMPRESSION



THERMOSTATIC MIXING VALVE W/ INTEGRAL CHECK VALVES

Forged Brass Valve w/ DZR Brass Fittings & G1 Union Connections - Outlet Temperature Range 95° - 120°F

LEAD-FREE BRASS

SIZE	ITEM #	CTN/CASE
ASTM F1807 PEX		
1/2"	H-71202W-CAN*	1/10
3/4"	H-71203W-CAN*	1/10
ASTM F1960 PEX		
1/2"	H-73202W-CE-CAN	1/10
3/4"	H-73203W-CE-CAN	1/10
Press		
1/2"	H-78202W-CAN	1/10
3/4"	H-78203W-CAN	1/10
1"	H-78204W-CAN	1/10
Push		
1/2"	H-76202W-CAN†	1/10
3/4"	H-76203W-CAN†	1/10
FIP		
1/2"	H-72202W-CAN	1/10
3/4"	H-72203W-CAN	1/10
1"	H-72204W-CAN	1/10
MIP		
1/2"	H-74202W-CAN	1/10
3/4"	H-74203W-CAN	1/10
1"	H-74204W-CAN	1/10
SWT		
1/2"	H-75202W-CAN	1/10
3/4"	H-75203W-CAN	1/10
1"	H-75204W-CAN	1/10

*NEW ITEM NUMBER - FORMERLY H-7320W-CAN SERIES
†PUSH FITTINGS CERTIFIED TO ASSE 1061

THERMOSTATIC MIXING VALVE W/ INTEGRAL CHECK VALVES

Forged Brass Valve w/ DZR Brass Fittings, w/ Temperature Locking Handle & G1 Union Connections - Outlet Temperature Range 95° - 131°F

LEAD-FREE BRASS

SIZE	ITEM #	CTN/CASE
CASE WT		
ASTM F1807 PEX		
1/2"	H-71202W*	1/10
3/4"	H-71203W*	1/10
ASTM F1960 PEX		
1/2"	H-73202W-CE	1/10
3/4"	H-73203W-CE	1/10
Press		
1/2"	H-78202W	1/10
3/4"	H-78203W	1/10
1"	H-78204W	1/10
Push		
1/2"	H-76202W*	1/10
3/4"	H-76203W*	1/10
FIP		
1/2"	H-72202W	1/10
3/4"	H-72203W	1/10
1"	H-72204W	1/10
MIP		
1/2"	H-74202W	1/10
3/4"	H-74203W	1/10
1"	H-74204W	1/10
SWT		
1/2"	H-75202W	1/10
3/4"	H-75203W	1/10
1"	H-75204W	1/10

*NEW ITEM NUMBER - FORMERLY H-7320W SERIES
†PUSH FITTINGS CERTIFIED TO ASSE 1061

THERMOSTATIC MIXING VALVE W/ INTEGRAL CHECK VALVES

Forged Brass Valve w/ Temperature Locking Handle & G1 Union Connections - Outlet Temperature Range 104° - 176°F

LEAD-FREE BRASS

SIZE	ITEM #	CTN/CASE
ASTM F1807 PEX		
1/2"	H-71272W	1/10
3/4"	H-71273W	1/10
ASTM F1960 PEX		
1/2"	H-73272W	1/10
3/4"	H-73273W	1/10
Press		
1/2"	H-78272W	1/10
3/4"	H-78273W	1/10
1"	H-78274W	1/10
FIP		
1/2"	H-72272W	1/10
3/4"	H-72273W	1/10
1"	H-72274W	1/10
MIP		
1/2"	H-74272W	1/10
3/4"	H-74273W	1/10
1"	H-74274W	1/10
SWT		
1/2"	H-75272W	1/10
3/4"	H-75273W	1/10
1"	H-75274W	1/10

- Ultra-compact 2½" x 3¼" body is ideal for discrete under sink installations
- Cold water by-pass models include elbow and tee
- Optional temperature gauge available

CHROME PLATED FORGED DZR BRASS THERMOSTATIC MIXING VALVE

Outlet Temperature Range 95° - 120°F

SIZE	ITEM #	CTN/CASE
Compression		
3/8"	H-77201W	1/100
W/ 20-220°F TEMPERATURE GAUGE		
3/8"	H-77201W-TG	1/10
W/ COLD WATER BY-PASS FITTINGS		
3/8"	H-77211W	1/10
W/ COLD WATER BY-PASS FITTINGS & 20-220°F TEMPERATURE GAUGE		
3/8"	H-77211W-TG	1/10

Webstone
a brand of **NIBCO**

VALVE INNOVATION GUARANTEED FOR LIFE


CONDITIONS APPLY. SEE WEBSTONEVALVES.COM FOR FULL DETAILS.
800-225-9529 • webstonevalves.com

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

LEAD-FREE: Weighted average lead content ≤ 0.25%


TMV APPLICATIONS

WATER DISTRIBUTION SYSTEMS

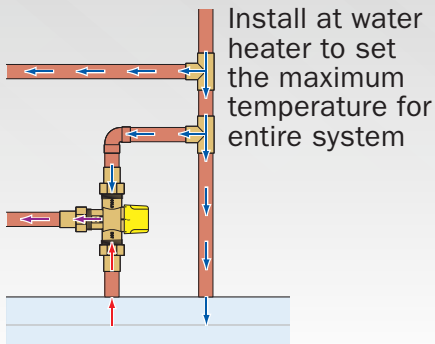



LOW TEMP HYDRONIC

Set a maximum temperature up to 131°F for radiant floor or other low temp heating application

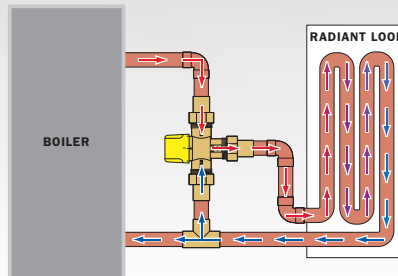


HIGH TEMP HYDRONIC

Set a maximum temperature up to 176°F for radiant floor, baseboard heat, radiators, or other high temp heating application

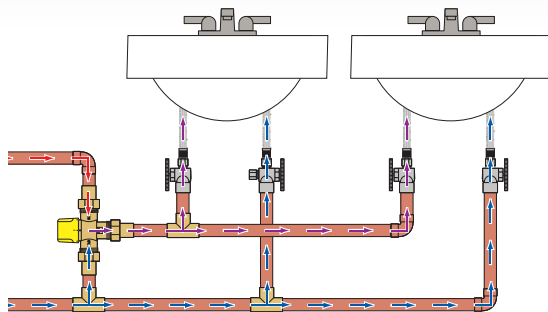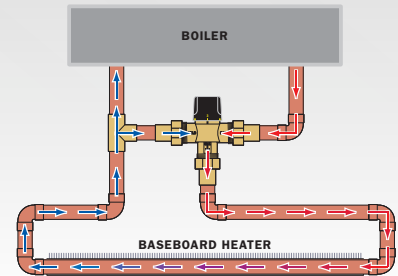

POINT OF USE - MULTI FIXTURE

Set the maximum temperature for a group of fixtures

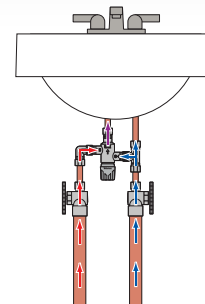

POINT OF USE - SINGLE FIXTURE

Set the maximum temperature of each fixture individually

TMV ACCESSORIES



ISOLATION BALL VALVE
Full Port Forged DZR Brass Valve

LEAD-FREE BRASS
Certified to NSF/ANSI 61 & 372

SIZE	ITEM #	CTN/CASE
G1 Union x G1 Thread		150 PSI CWP
REVERSIBLE YELLOW HANDLE		
1"	H-7-G134WY	10/60
REVERSIBLE RED HANDLE W/ INTEGRAL CHECK VALVE		
1"	H-7-G234WR	10/60
REVERSIBLE BLUE HANDLE W/ INTEGRAL CHECK VALVE		
1"	H-7-G234WB	10/60



ANGLED ISOLATION BALL VALVE
Full Port Forged DZR Brass Valve

LEAD-FREE BRASS
Certified to NSF/ANSI 61 & 372

SIZE	ITEM #	CTN/CASE
G1 Union x G1 Thread		150 PSI CWP
REVERSIBLE YELLOW HANDLE		
1"	H-7-G134WY-A	10/60
REVERSIBLE RED HANDLE W/ INTEGRAL CHECK VALVE		
1"	H-7-G234WR-A	10/60
REVERSIBLE BLUE HANDLE W/ INTEGRAL CHECK VALVE		
1"	H-7-G234WB-A	10/60



THE ISOLATOR W/ ROTATING FLANGE
Full Port Forged DZR Brass Uni-Flange Ball Valve - w/ Detachable Rotating Flange, Adjustable Packing Ring, Nuts & Bolts

LEAD-FREE BRASS
Certified to NSF/ANSI 61 & 372

SIZE	ITEM#	HV ITEM#	CTN/CASE
G1 Union x Rotating Flange			600 CWP
1"	H-G1404W	H-G1404WHV	1/20
W/ MULTI-FUNCTION HI-FLOW HOSE DRAIN			
1"	H-G1414W	H-G1414WHV	1/20

HV ITEMS FIT HIGH VELOCITY & STANDARD SIZE PUMPS.

DUAL SCALE TEMPERATURE GAUGE
w/ Integrated Chrome Plated Forged DZR Brass Fitting - 1" Dial - Temperature Range 20 - 220° F -



LEAD-FREE BRASS
Certified to NSF/ANSI 61 & 372

SIZE	ITEM #	CTN/CASE
Compression		150 PSI
3/8"	H-33000W	10/100



DUAL SCALE TEMPERATURE GAUGE
w/ Integrated Forged Brass Fitting - 1 1/2" Dial - Temperature Range 32° - 248° F -

LEAD-FREE BRASS
Certified to NSF/ANSI 61 & 372

SIZE	ITEM #	CTN/CASE
G1 Union x G1 Thread		10/100
1"	H-32000W	

G1 UNION ELBOW
Forged DZR Brass Fitting



LEAD-FREE BRASS
Certified to NSF/ANSI 61 & 372

SIZE	ITEM #	CTN/CASE
G1 Union x G1 Thread		150 PSI CWP
1"	H-7-G144W-A	10/60

ISOLATION KITS

- Isolates TMV body for service
- Versatile combinations cover most TMV installations
- Easily re-arrange color-coded handles/check valves to valve bodies in accordance with system needs
- Compatible with G1 Union Connections

	ISOLATION BALL VALVE			ANGLED ISOLATION BALL VALVE			The ISOLATOR [®] (UNI-FLANGE BALL VALVE)	
	Reversible Yellow Handle	Reversible Red Handle w/ Integral Check Valve	Reversible Blue Handle w/ Integral Check Valve	Reversible Yellow Handle	Reversible Red Handle w/ Integral Check Valve	Reversible Blue Handle w/ Integral Check Valve	w/ Rotating Flange	w/ Rotating Flange & Multi-Function Drain
H-7-G234W-KITA		✓	✓					
H-7-G234W-A-KITA					✓	✓		
H-7-G234W-KITB	✓	✓	✓					
H-7-G234W-A-KITB	✓				✓	✓		
H-7-G234W-KITD				✓				
H-G1404W-KITB		✓	✓				✓	
H-G1404W-A-KITB					✓	✓	✓	
H-G1414W-KITB		✓	✓					✓
H-G1414W-A-KITB					✓	✓		✓