



## PURGE & FILL™

- Simultaneously drain, flush & refill any hydronic, solar, or closed loop system
- T-pattern flow path quickly and easily prevents the flow between the two hose connections
- As fluid is introduced into the system, the existing fluid or air is diverted out of the system through the remaining hose connection
- Reversible handle for added versatility

**THE OLD WAY**


**THE WEBSTONE WAY**

REPLACES 7 COMPONENTS   SAVES 54 MINUTES   ELIMINATES 6 LEAK PATHS

**PURGE & FILL**  
Full Port Forged Brass Ball Valve w/ (2) Hi-Flow Hose Drains, Reversible Handle & Adjustable Packing Glands

SIZE	ITEM#	STANDARD BRASS	
		CTN/CASE	CASE WT
<b>FIP</b> 600 PSI CWP Max			
3/4"	H-48613	1/12	20
1"	H-48614	1/12	26
1 1/4"	H-48615	1/12	38
1 1/2"	H-48616	1/12	49
<b>SWT</b> 600 PSI CWP Max			
3/4"	H-58613	1/12	23
1"	H-58614	1/12	26
1 1/4"	H-58615	1/12	38
1 1/2"	H-58616	1/12	51
<b>Press</b> 250 PSI CWP Max/250°F Max			
3/4"	H-88613	1/12	20
1"	H-88614	1/12	27
1 1/4"	H-88615	1/12	40
1 1/2"	H-88616	1/6	27

## Simultaneously Drain, Flush & Fill

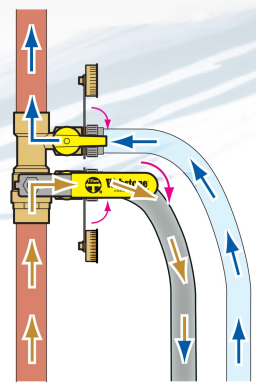

## EXPANSION TANK PRO SERVICE VALVE™

- The 3-way ball controls flow between the expansion tank and the system
- Easily install, isolate, drain & replace any expansion tank
- Quickly connect entire system to the cold water feed
- MIP model for direct connection to air separator or tee
- FIP model allows for distance between tank and system

**THE OLD WAY**

**THE WEBSTONE WAY**

REPLACES 7 COMPONENTS   SAVES 54 MINUTES   ELIMINATES 6 LEAK PATHS

**HANDLE OPERATION**

Normal Operation   System Isolation & Tank Draining

**EXPANSION TANK PRO SERVICE VALVE**  
Full Port Forged Brass Ball Valve w/ Hi-Flow Hose Drain

SIZE	ITEM#	STANDARD BRASS	
		CTN/CASE	CASE WT
<b>MIP/SWT × FIP × Hose</b> 600 PSI CWP Max/250°F Max			
1/2"	H-41672	1/30	29
<b>FIP × Hose</b> 600 PSI CWP Max			
1/2"	H-44672	1/30	31

Ideal for use with Horizontal Air Separator  
**SEE PAGE 21**