


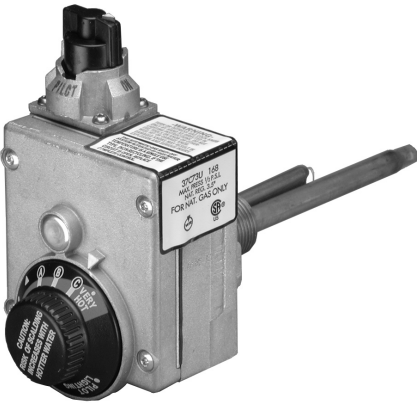

37C73U-168

GAS WATER HEATER CONTROLS

For Replacement of Standard Gas Water Heater Controls With
Built-In E.C.O. (Energy Cut Off)

FEATURES

- Automatic shut-off of main and pilot gas in the event of pilot failure.
- Pilot gas cock with safe lighting feature and filter.
- Temperature adjustment.
- Manifold pressure tap.
- Built-In E.C.O. (Energy Cut Off) non-cycling high limit.

SPECIFICATIONS

Inlet Size	1/2" NPT
Outlet Size	1/2" inverted flare
Outlet Adapter Fittings (furnished with controls noted below)	1/2" inverted flare x 3/8" NPT reducer adapter. 1/2" x 1/2" inverted flare outlet extension adapter (F26-0021)
Mounting	3/4" NPT, 1 1/4" shank length, 4 1/2" bulb insertion length
Pilot Connection	1/4" compression fitting
Agency	A.G.A. certified

For use with Natural Gas (Right Hand Threads on Outlet)

Model Number	Pressure Regulation		Temperature Range	Shank Length
	Main Burner	Pilot		
37C73U-168 ①	3.5" W.C. (A.O. Smith Style)	Fixed	70 to 160°F (21 to 71°C)	1 1/4"

① Outlet adapter fittings included.

For use with LP Gas (Left Hand Threads)

Model Number	Pressure Regulation		Temperature Range	Shank Length
	Main Burner	Pilot		
37C72U-185 ②	10.0" W.C.	Fixed	70 to 160°F (21 to 71°C)	1 1/4"

② Includes Left Hand outlet extension fittings: 1/2" LH x 1/2" LH inverted flare (F26-0160) and 1/2" LH x 3/8" LH inverted flare (F26-0161)