


Ambient Temp: -40°F to 122°F (-40°C to 50°C)
Process Temperature: -40°F to 400°F (-40°C to 200°C)
Case: Black ,ABS plastic
Lens: Glass
Dial: Aluminum
Tube: Glass, tinted red kerosene fill
Thermowell:Lead Free Brass
Accuracy: ±2% of full scale
Enclosure Rating: IP50

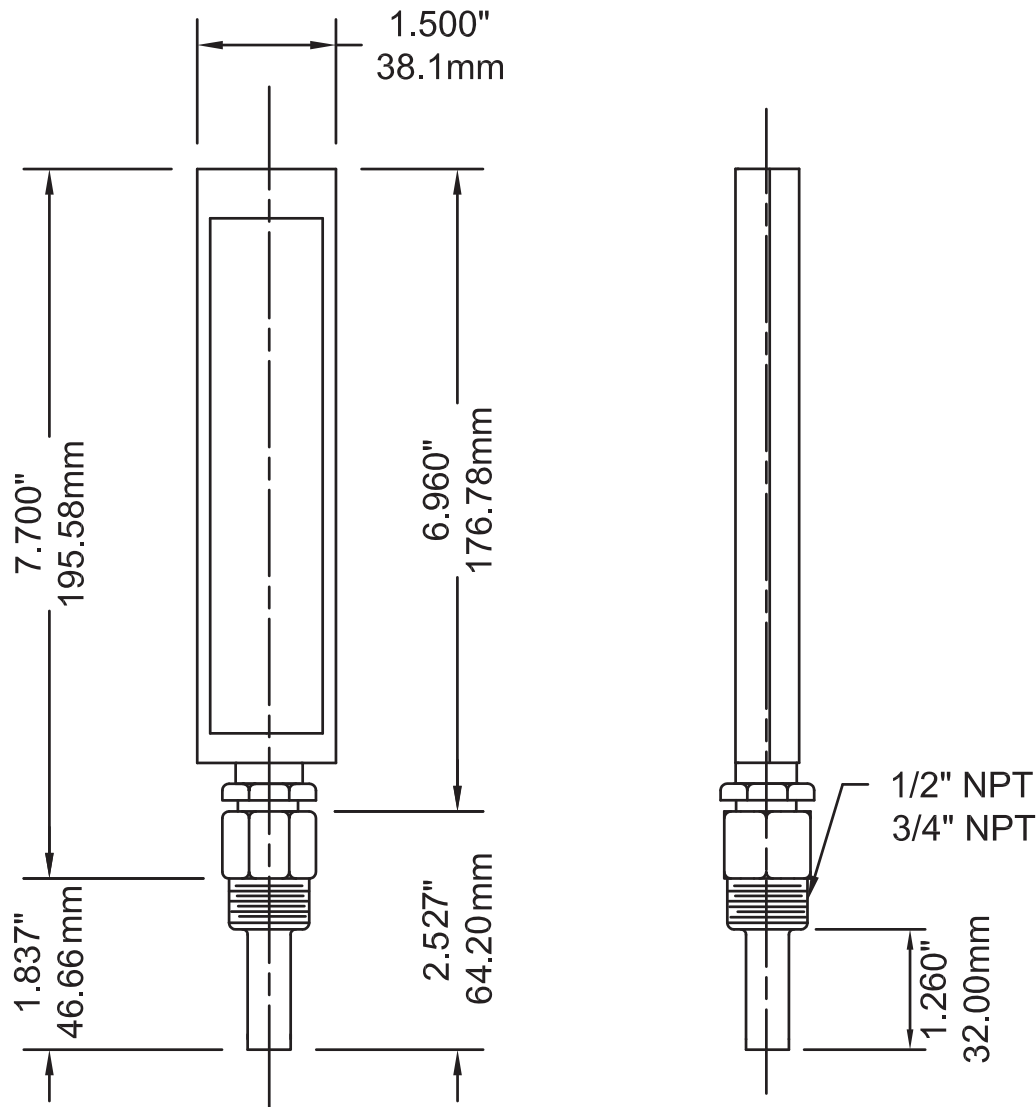

DRAWN BY: ROBIN LUGTU

ENG. APPROVAL: DR

ALL DIMENSIONS IN INCHES/MM

TOLERANCES
(unless otherwise stated)

Fractional:	$\frac{1}{64}$ " 0.4mm
Decimal:	0.06" 1.5mm

REVISION DATE: #3, Apr. 02, 2015

TITLE:

INDUSTRIAL 5AS, BOTTOM CONNECTION

DRAWING NO:TAS-LF-B-020-B-2N