

Process Temperature: -50°F to 320°F (-45°C to 160°C) (switchable, 6s response)

Ambient Temperature: 14°F to 150°F (-10°C to 65°C)


Case: High Impact ABS Plastic

Lens: Polycarbonate

Lux Rating: 16 LUX

Accuracy: 1.0% of full scale

Enclosure: IP60

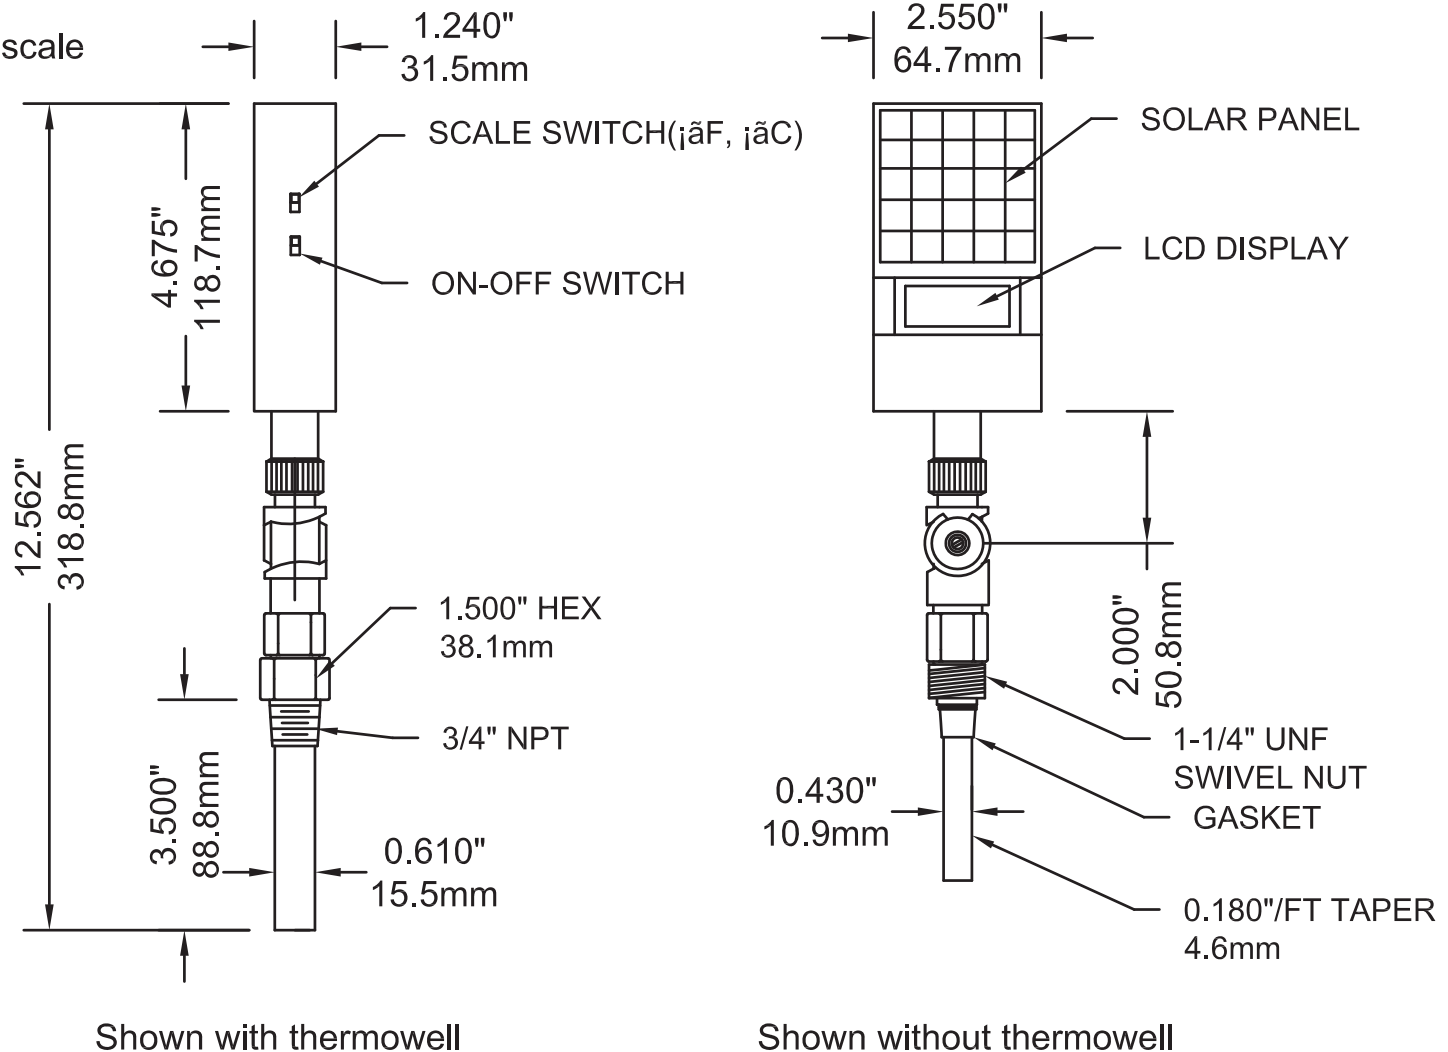

DRAWN BY: PHOEBE MA

ENG. APPROVAL:

ALL DIMENSIONS IN INCHES/MM

TOLERANCES
(unless otherwise stated)

Fractional: $\frac{1}{64}$ " 0.4mm

Decimal: 0.06" 1.5mm

REVISION DATE: Jan. 08, 2009

TITLE:

INDUSTRIAL 9IT SOLAR DIGITAL WITH 3.5"
STEM

DRAWING NO: TSD9ITSD