


# intamix

**TANK MAXIMIZER**  
THERMOSTATIC MIXING VALVE

ZMIX

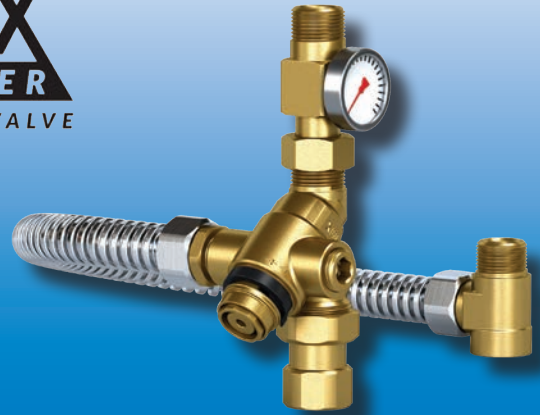

The Zilmet Intamix Maximizer is installed on a water heater and will allow the water heater to safely operate at a higher set point.

This delivers:

1. More usable hot water so your 50 gallon water heater acts like an 80 gallon water heater
2. Higher temperatures to kill water-borne bacteria such as Legionella

#### Product Features

- Meets two different ASSE standards
  - o ASSE1070 with factory preset of 120F
  - o ASSE1017 with adjustment for hot water distribution systems
- Temperature gauge and stainless steel hose
- Internal non-return valve with stainless steel mesh screen to help prevent debris from entering valves inner components

#### Product Benefits

- Tank connection union allows valve orientation towards work direction
- Two recirculation loop ports for ultimate flexibility in installation
- Temperature locking hex for tamper resistance
- Angled body for convenient accessibility during maintenance

#### technical specifications

temperature range	95° F – 140° F
factory set temperature	120° F
minimum flow rate	1.2 GPM
max inlet temperature	195° F
max inlet pressure	150 psi

**Model number: ZMIX**

**Zilmet Intamix Tank Maximizer Thermostatic Mixing**

**Valve List Price: \$425.95**



ASSE 1070 ASME A112.1070 & CSA B125.70  
ASSE 1017 & CSA B125.3

from Zilmet



INFO@ZILMETUSA.COM | ZILMETUSA.COM