

quality . service
innovation . integrity

Model 314



Features

The "High Capacity Water-Mover" utility pump is designed for use in numerous applications. The pump is extremely useful for removing water from water heaters, power washing applications, adding propylene glycol anti-freeze to radiant heating lines, and other water transfer applications. Each pump is built using non-corrodible materials, permanently lubricated ball bearings, and a carbon ceramic shaft seal, ensuring a long service life. Additionally, each pump comes equipped with a 3/4" NPT brass, lead-free garden hose adapter, a suction screen, and an extra set of brushes.

Specifications

Motor Characteristics

Motor	1/2 HP
Voltage	115 V
Phase	1 Ph
Hertz	60 Hz

Pump Characteristics

Operation	Nonautomatic
Discharge Size	3/4" NPT or standard garden hose
Cord Length	20' (6 m) standard
Cord Type	Grounded plug
Max Head	110' (33.5 m)
Max Flow Rate	1400 GPH (5300 LPH)
Max Operating Temp	104 °F (40 °C)
Cooling	Air

Materials Characteristics

Pump Housing	Cast iron
Mechanical Seals	Carbon and ceramic
Impeller	Engineered thermoplastic




PUMP COMPANY

Zoeller Family of Water Solutions™

FM2127_Ea

Updated 0816

Model 314

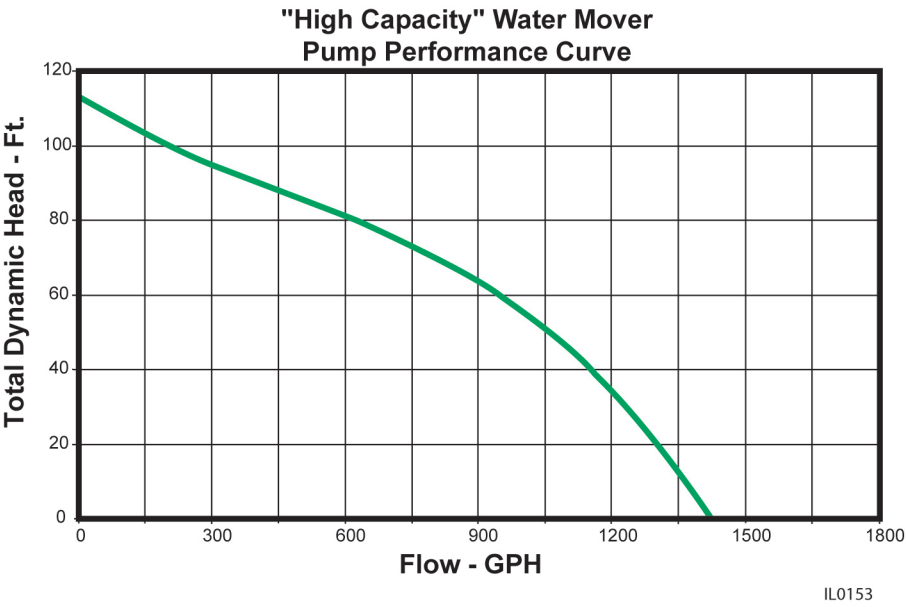

Model

Model Number	Seal	Mode	Volts	Phase	HP	CSA/UL	Hz	Lbs	Kg
314	Single	Non	115	1	1/2	Y/N	60	17	8

Your Peace of Mind is Our Top Priority®
3649 Cane Run Rd | Louisville, KY 40211 USA
+1 502-778-2731 | 1-800-928-7867 | Fax: +1 502-774-3624
www.zoeller.com

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies. Copyright Zoeller Company. All rights reserved.