



Round Adjustable Floor Drain w/ Nickel Bronze or Polished Bronze Top

Dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

PRODUCT DESCRIPTION:

(Dura-Coated Cast Iron, ABS, or PVC) drain body with plugged 1/2 [13] trap primer connection, (cast iron or ABS) threaded adjustable adaptor, and round (polished bronze, polished nickel bronze or chrome-plated bronze) secured, light-duty top with easy snap-on assembly. Materials to be selected as required for application.

Top Size and Material - (Pick ONE)

___ LC-FR05CP	5 [127] Chrome-Plated Bronze Top	29/32 [23] Min. 2-9/16 [65] Max. Adjustment
___ LC-FR05PB	5 [127] Polished Bronze Top	29/32 [23] Min. 2-9/16 [65] Max. Adjustment
___ LC-FR05NI	5 [127] Polished Nickel Bronze Top	29/32 [23] Min. 2-9/16 [65] Max. Adjustment
___ LC-FR06NI	6 [152] Polished Nickel Bronze Top	29/32 [23] Min. 2-9/16 [65] Max. Adjustment
___ LC-FR07NI	7 [178] Polished Nickel Bronze Top	31/32 [25] Min. 2-9/16 [65] Max. Adjustment
___ LC-FR08NI	8 [203] Polished Nickel Bronze Top	1-1/32 [26] Min. 2-11/16 [69] Max. Adjustment
___ LC-FR10NI	10 [254] Polished Nickel Bronze Top	1-3/16 [30] Min. 2-27/32 [72] Max. Adjustment

Threaded Shank Material - (Pick ONE)

___ LC-CS	Cast Iron Adaptor	4 [102] NPSM Threads
___ LC-PS	ABS Adaptor	4 [102] NPSM Threads

Drain Body Material / Outlet Size / Outlet Type - (Pick ONE)


___ LC-C2N	D.C.C.I.	4 [102] Body Ht.	2 [51] No-Hub Outlet
___ LC-C3N	D.C.C.I.	4 [102] Body Ht.	3 [76] No-Hub Outlet
___ LC-C4N	D.C.C.I.	4 [102] Body Ht.	4 [102] No-Hub Outlet
___ LC-C2P	D.C.C.I.	4-5/64 [104] Body Ht.	2 [51] Push-On Outlet
___ LC-C3P	D.C.C.I.	4-3/64 [102] Body Ht.	3 [76] Push-On Outlet
___ LC-C4P	D.C.C.I.	4-1/64 [102] Body Ht.	4 [102] Push-On Outlet
___ LC-A2S	ABS	3-5/64 [78] Body Ht.	2 [51] Solvent Weld Outlet
___ LC-A3S	ABS	3-51/64 [96] Body Ht.	3 [76] Solvent Weld Outlet
___ LC-A4S	ABS	4-1/64 [102] Body Ht.	4 [102] Solvent Weld Outlet
___ LC-P2S	PVC	3-5/64 [78] Body Ht.	2 [51] Solvent Weld Outlet
___ LC-P3S	PVC	3-51/64 [96] Body Ht.	3 [76] Solvent Weld Outlet
___ LC-P4S	PVC	4-1/64 [102] Body Ht.	4 [102] Solvent Weld Outlet

(Check/specify appropriate drain options)

Suffixes

- ___ LC-CC Cast Iron Membrane Clamp Collar
___ LC-RC Pre-Pour ABS Rough-in Cover
(For 5 [127] and 6 [152] Top Sizes Only)
___ LC-VP Vandal-Proof Secured Top

Top Size	Top Open Area Sq. In. [cm ²]
5 [127]	7 [45]
6 [152]	9 [58]
7 [178]	13 [84]
8 [203]	19 [123]
10 [254]	23 [148]

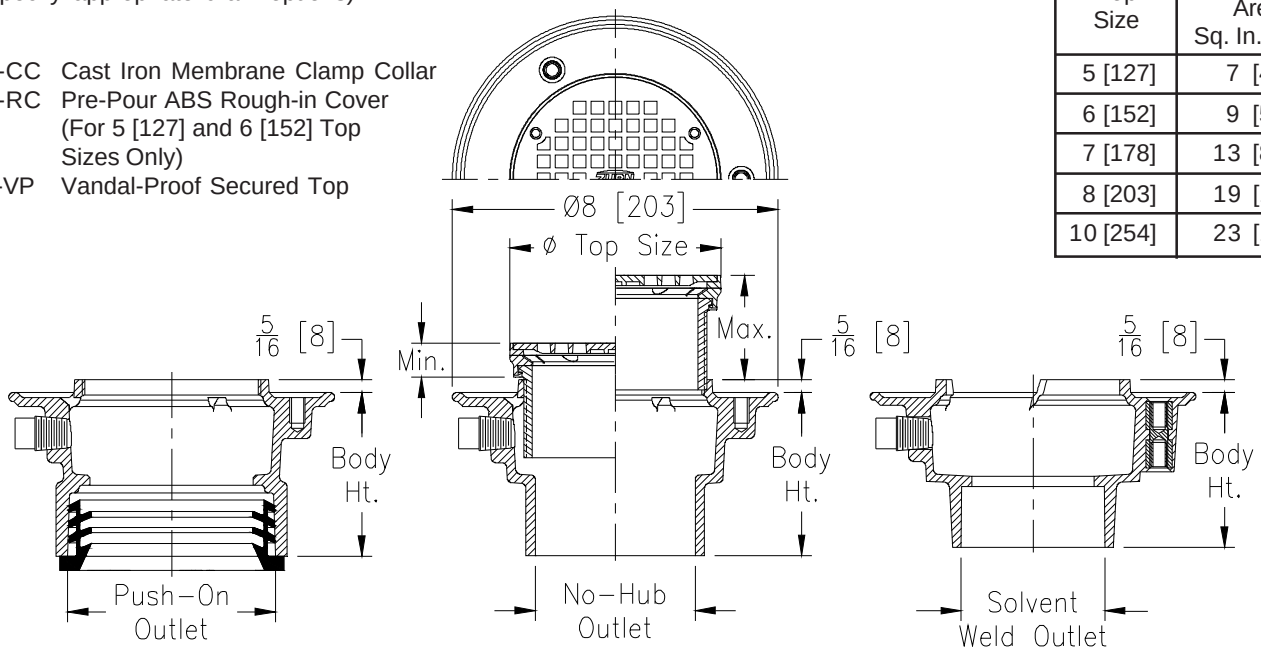

* Regularly furnished unless otherwise specified.



Round Adjustable Floor Drain w/ Stainless Steel Top

Dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

PRODUCT DESCRIPTION:

(Dura-Coated Cast Iron, ABS, or PVC) drain body with plugged 1/2 [13] trap primer connection, (cast iron or ABS) threaded adjustable adaptor, and round stainless steel secured, light-duty top with easy snap-on assembly. Materials to be selected as required for application.

Top Size and Material - (Pick ONE)

___ LC-FR05SS	5 [127]	Stainless Steel Top	29/32 [23] Min. 2-9/16 [65] Max. Adjustment
___ LC-FR06SS	6 [152]	Stainless Steel Top	29/32 [23] Min. 2-9/16 [65] Max. Adjustment
___ LC-FR07SS	7 [178]	Stainless Steel Top	31/32 [25] Min. 2-9/16 [65] Max. Adjustment
___ LC-FR08SS	8 [203]	Stainless Steel Top	1-1/32 [26] Min. 2-11/16 [51] Max. Adjustment
___ LC-FR10SS	10 [254]	Stainless Steel Top	1-3/16 [30] Min. 2-27/32 [72] Max. Adjustment

Threaded Shank Material - (Pick ONE)

___ LC-CS	Cast Iron Adaptor	4 [102] NPSM Threads
___ LC-PS	ABS Adaptor	4 [102] NPSM Threads

Drain Body Material / Outlet Size / Outlet Type - (Pick ONE)


___ LC-C2N	D.C.C.I.	4 [102] Body Ht.	2 [51] No-Hub Outlet
___ LC-C3N	D.C.C.I.	4 [102] Body Ht.	3 [76] No-Hub Outlet
___ LC-C4N	D.C.C.I.	4 [102] Body Ht.	4 [102] No-Hub Outlet
___ LC-C2P	D.C.C.I.	4-5/64 [104] Body Ht.	2 [51] Push-On Outlet
___ LC-C3P	D.C.C.I.	4-3/64 [102] Body Ht.	3 [76] Push-On Outlet
___ LC-C4P	D.C.C.I.	4-1/64 [102] Body Ht.	4 [102] Push-On Outlet
___ LC-A2S	ABS	3-5/64 [78] Body Ht.	2 [51] Solvent Weld Outlet
___ LC-A3S	ABS	3-51/64 [96] Body Ht.	3 [76] Solvent Weld Outlet
___ LC-A4S	ABS	4-1/64 [102] Body Ht.	4 [102] Solvent Weld Outlet
___ LC-P2S	PVC	3-5/64 [78] Body Ht.	2 [51] Solvent Weld Outlet
___ LC-P3S	PVC	3-51/64 [96] Body Ht.	3 [76] Solvent Weld Outlet
___ LC-P4S	PVC	4-1/64 [102] Body Ht.	4 [102] Solvent Weld Outlet

(Check/specify appropriate drain options)

Suffixes

___ LC-CC	Cast Iron Membrane Clamp Collar
___ LC-RC	Pre-Pour ABS Rough-in Cover (For 5 [127] and 6 [152] Top Sizes Only)
___ LC-VP	Vandal-Proof Secured Top

Top Size	Top Open Area Sq. In. [cm ²]
5 [127]	7 [45]
6 [152]	10 [65]
7 [178]	15 [97]
8 [203]	20 [129]
10 [254]	26 [168]

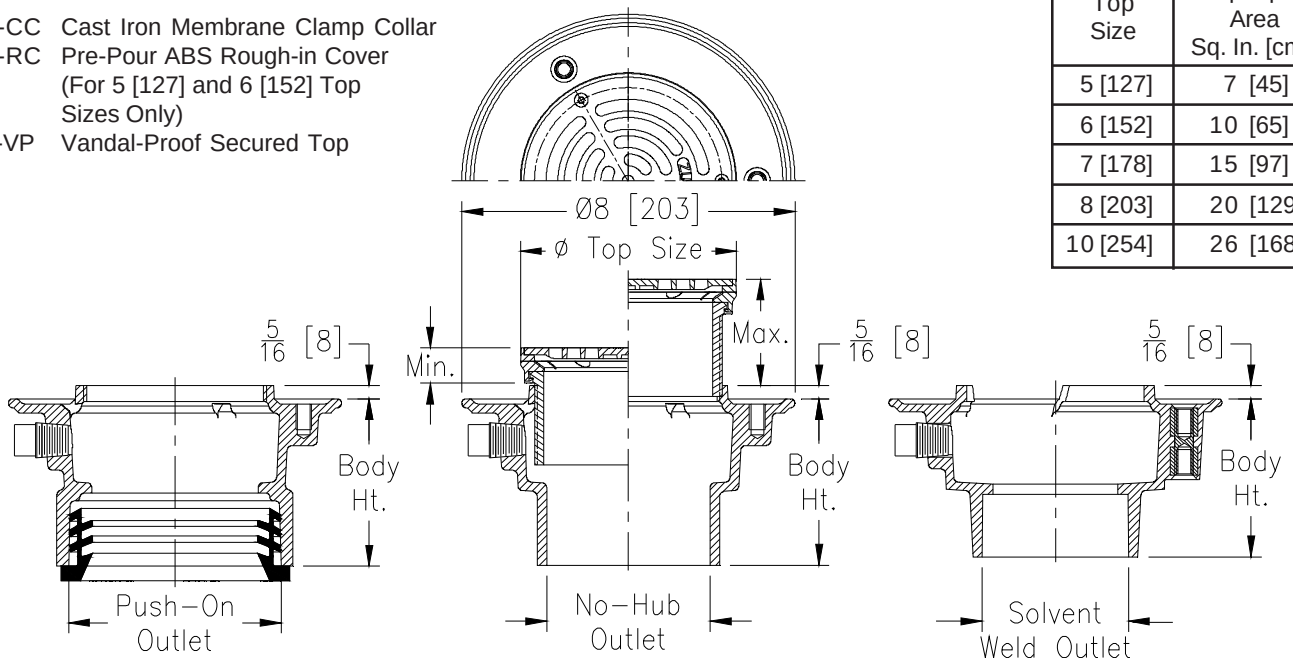

* Regularly furnished unless otherwise specified.



Round Adjustable Floor Drain w/ Ductile Iron Top

Dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

PRODUCT DESCRIPTION:

(Dura-Coated Cast Iron, ABS, or PVC) drain body with plugged 1/2 [13] trap primer connection, (cast iron or ABS) threaded adjustable adaptor, and round ductile iron secured, heavy-duty top with easy snap-on assembly. Materials to be selected as required for application.

Top Size and Material - (Pick ONE)

- ___ LC-FR05DI 5 [127] Ductile Iron Top 1 [25] Min. 2-21/32 [67] Max. Adjustment
___ LC-FR08DI 8 [203] Ductile Iron Top 1-1/8 [29] Min. 2-25/32 [71] Max. Adjustment

Threaded Shank Material - (Pick ONE)

- ___ LC-CS Cast Iron Adaptor 4 [102] NPSM Threads
___ LC-PS ABS Adaptor 4 [102] NPSM Threads

Drain Body Material / Outlet Size / Outlet Type - (Pick ONE)


- ___ LC-C2N D.C.C.I. 4 [102] Body Ht. 2 [51] No-Hub Outlet
___ LC-C3N D.C.C.I. 4 [102] Body Ht. 3 [76] No-Hub Outlet
___ LC-C4N D.C.C.I. 4 [102] Body Ht. 4 [102] No-Hub Outlet
___ LC-C2P D.C.C.I. 4-5/64 [104] Body Ht. 2 [51] Push-On Outlet
___ LC-C3P D.C.C.I. 4-3/64 [102] Body Ht. 3 [76] Push-On Outlet
___ LC-C4P D.C.C.I. 4-1/64 [102] Body Ht. 4 [102] Push-On Outlet
___ LC-A2S ABS 3-5/64 [78] Body Ht. 2 [51] Solvent Weld Outlet
___ LC-A3S ABS 3-51/64 [96] Body Ht. 3 [76] Solvent Weld Outlet
___ LC-A4S ABS 4-1/64 [102] Body Ht. 4 [102] Solvent Weld Outlet
___ LC-P2S PVC 3-5/64 [78] Body Ht. 2 [51] Solvent Weld Outlet
___ LC-P3S PVC 3-51/64 [96] Body Ht. 3 [76] Solvent Weld Outlet
___ LC-P4S PVC 4-1/64 [102] Body Ht. 4 [102] Solvent Weld Outlet

(Check/specify appropriate drain options)

Suffixes

- ___ LC-CC Cast Iron Membrane Clamp Collar
___ LC-RC Pre-Pour ABS Rough-in Cover
(For 5 [127] Top Size Only)
___ LC-VP Vandal-Proof Secured Top

Top Size	Top Open Area Sq. In. [cm ²]
5 [127]	5 [32]
8 [203]	18 [116]

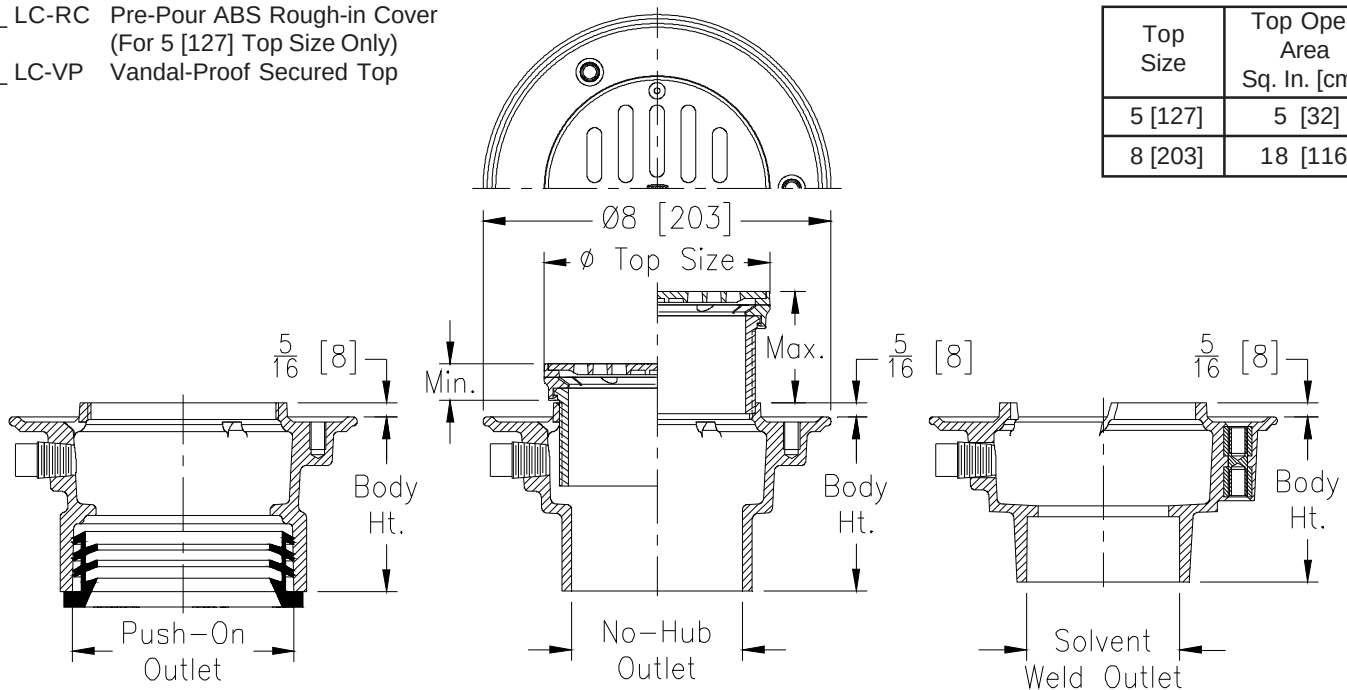

* Regularly furnished unless otherwise specified.



Square Adjustable Floor Drain w/ Nickel Bronze or Polished Bronze Top

Dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

PRODUCT DESCRIPTION:

(Dura-Coated Cast Iron, ABS, or PVC) drain body with plugged 1/2 [13] trap primer connection, (cast iron or ABS) threaded adjustable adaptor, and square (polished bronze, polished nickel bronze or chrome-plated bronze) secured, light-duty top with easy snap-on assembly. Materials to be selected as required for application.

Top Size and Material - (Pick ONE)

___ LC-FS05CP	5 x 5 [127 x 127]	Chrome-Plated Bronze Top	31/21 [25]	Min. 2-5/8 [67]	Max. Adjustment
___ LC-FS05PB	5 x 5 [127 x 127]	Polished Bronze Top	31/21 [25]	Min. 2-5/8 [67]	Max. Adjustment
___ LC-FS05NI	5 x 5 [127 x 127]	Polished Nickel Bronze Top	31/21 [25]	Min. 2-5/8 [67]	Max. Adjustment
___ LC-FS06NI	6 x 6 [152 x 152]	Polished Nickel Bronze Top	31/21 [25]	Min. 2-5/8 [67]	Max. Adjustment
___ LC-FS08NI	8 x 8 [203 x 203]	Polished Nickel Bronze Top	1-1/16 [27]	Min. 2-23/32 [69]	Max. Adjustment

Threaded Shank Material - (Pick ONE)

___ LC-CS	Cast Iron Adaptor	4 [102]	NPSM Threads
___ LC-PS	ABS Adaptor	4 [102]	NPSM Threads


Drain Body Material / Outlet Size / Outlet Type - (Pick ONE)

___ LC-C2N	D.C.C.I.	4 [102]	Body Ht.	2 [51]	No-Hub Outlet
___ LC-C3N	D.C.C.I.	4 [102]	Body Ht.	3 [76]	No-Hub Outlet
___ LC-C4N	D.C.C.I.	4 [102]	Body Ht.	4 [102]	No-Hub Outlet
___ LC-C2P	D.C.C.I.	4-5/64	[104] Body Ht.	2 [51]	Push-On Outlet
___ LC-C3P	D.C.C.I.	4-3/64	[102] Body Ht.	3 [76]	Push-On Outlet
___ LC-C4P	D.C.C.I.	4-1/64	[102] Body Ht.	4 [102]	Push-On Outlet
___ LC-A2S	ABS	3-5/64	[78] Body Ht.	2 [51]	Solvent Weld Outlet
___ LC-A3S	ABS	3-51/64	[96] Body Ht.	3 [76]	Solvent Weld Outlet
___ LC-A4S	ABS	4-1/64	[102] Body Ht.	4 [102]	Solvent Weld Outlet
___ LC-P2S	PVC	3-5/64	[78] Body Ht.	2 [51]	Solvent Weld Outlet
___ LC-P3S	PVC	3-51/64	[96] Body Ht.	3 [76]	Solvent Weld Outlet
___ LC-P4S	PVC	4-1/64	[102] Body Ht.	4 [102]	Solvent Weld Outlet

(Check/specify appropriate drain options)

Suffixes

___ LC-CC	Cast Iron Membrane Clamp Collar
___ LC-RC	Pre-Pour ABS Rough-in Cover (For 5 [127] and 6 [152] Top Sizes Only)
___ LC-VP	Vandal-Proof Secured Top

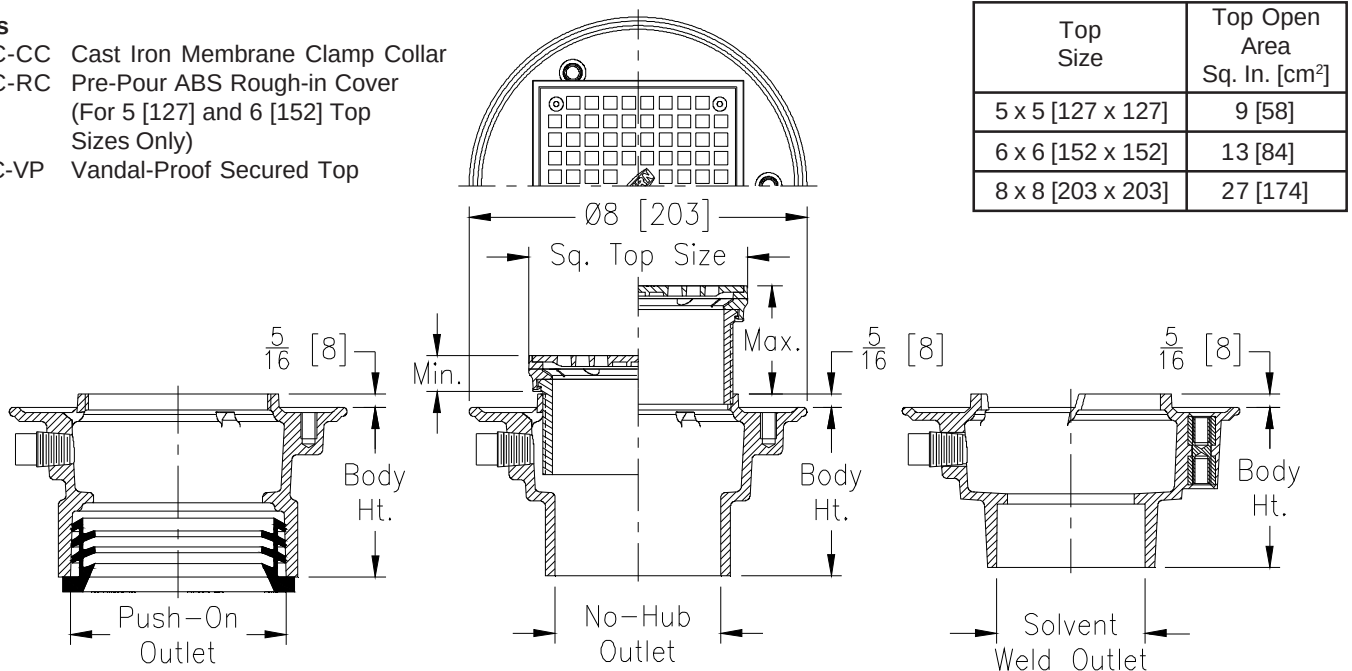

* Regularly furnished unless otherwise specified.



Square Adjustable Floor Drain w/ Stainless Steel Top

Dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

PRODUCT DESCRIPTION:

(Dura-Coated Cast Iron, ABS, or PVC) drain body with plugged 1/2 [13] trap primer connection, (cast iron or ABS) threaded adjustable adaptor, and square stainless steel secured, light-duty top with easy snap-on assembly. Materials to be selected as required for application.

Top Size and Material - (Pick ONE)

___ LC-FS05SS	5 x 5 [127 x 127]	Stainless Steel Top		31/21 [25]	Min. 2-5/8 [67]	Max. Adjustment
___ LC-FS06SS	6 x 6 [152 x 152]	Stainless Steel Top		31/21 [25]	Min. 2-5/8 [67]	Max. Adjustment
___ LC-FS08SS	8 x 8 [203 x 203]	Stainless Steel Top		1-1/16 [27]	Min. 2-23/32 [69]	Max. Adjustment

Threaded Shank Material - (Pick ONE)

___ LC-CS	Cast Iron Adaptor		4 [102]	NPSM Threads
___ LC-PS	ABS Adaptor		4 [102]	NPSM Threads


Drain Body Material / Outlet Size / Outlet Type - (Pick ONE)

___ LC-C2N	D.C.C.I.		4 [102]	Body Ht.		2 [51]	No-Hub Outlet
___ LC-C3N	D.C.C.I.		4 [102]	Body Ht.		3 [76]	No-Hub Outlet
___ LC-C4N	D.C.C.I.		4 [102]	Body Ht.		4 [102]	No-Hub Outlet
___ LC-C2P	D.C.C.I.		4-5/64	[104] Body Ht.		2 [51]	Push-On Outlet
___ LC-C3P	D.C.C.I.		4-3/64	[102] Body Ht.		3 [76]	Push-On Outlet
___ LC-C4P	D.C.C.I.		4-1/64	[102] Body Ht.		4 [102]	Push-On Outlet
___ LC-A2S	ABS		3-5/64	[78] Body Ht.		2 [51]	Solvent Weld Outlet
___ LC-A3S	ABS		3-51/64	[96] Body Ht.		3 [76]	Solvent Weld Outlet
___ LC-A4S	ABS		4-1/64	[102] Body Ht.		4 [102]	Solvent Weld Outlet
___ LC-P2S	PVC		3-5/64	[78] Body Ht.		2 [51]	Solvent Weld Outlet
___ LC-P3S	PVC		3-51/64	[96] Body Ht.		3 [76]	Solvent Weld Outlet
___ LC-P4S	PVC		4-1/64	[102] Body Ht.		4 [102]	Solvent Weld Outlet

(Check/specify appropriate drain options)

Suffixes

___ LC-CC	Cast Iron Membrane Clamp Collar
___ LC-RC	Pre-Pour ABS Rough-in Cover (For 5 [127] and 6 [152] Top Sizes Only)
___ LC-VP	Vandal-Proof Secured Top

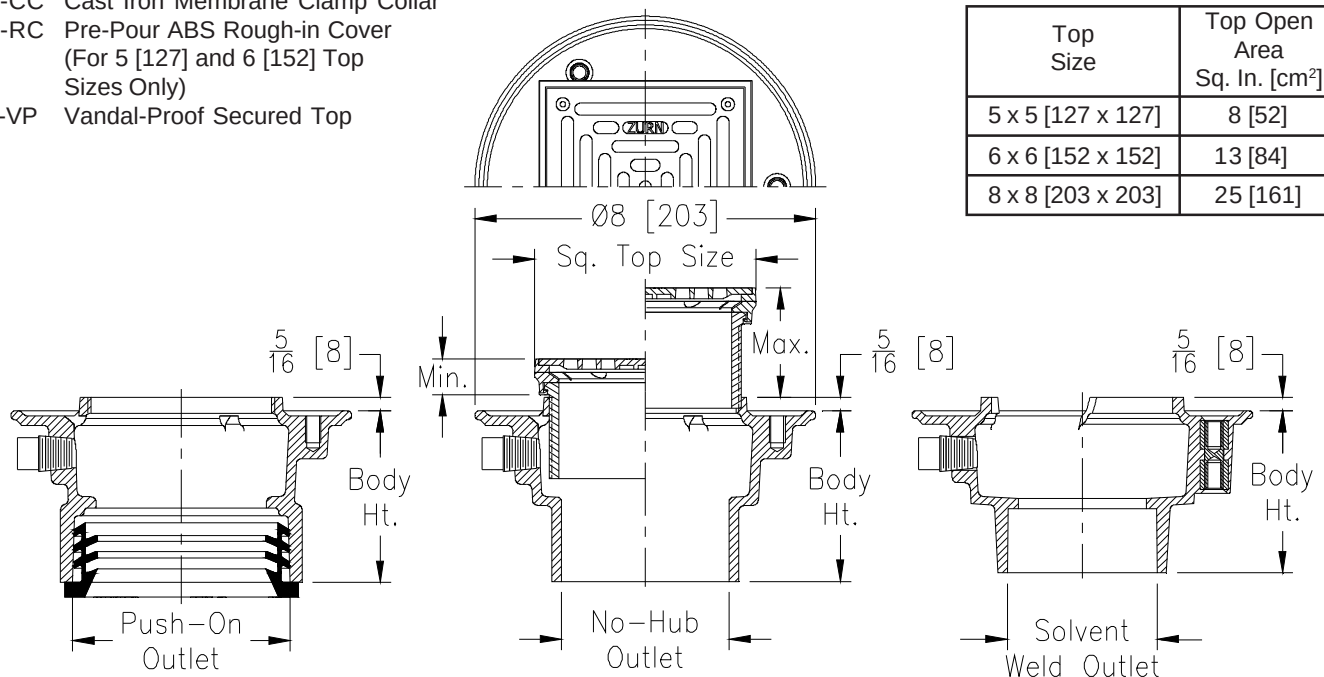

Top Size	Top Open Area Sq. In. [cm²]
5 x 5 [127 x 127]	8 [52]
6 x 6 [152 x 152]	13 [84]
8 x 8 [203 x 203]	25 [161]

* Regularly furnished unless otherwise specified.



Roof Drain w/ Dome and Gravel Guard

Dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

PRODUCT DESCRIPTION:

(Dura-Coated Cast Iron, ABS, or PVC) drain body, cast iron gravel guard, and (cast iron or polypropylene) dome. Material to be selected as required for application.

Dome and Gravel Guard - (Pick ONE)

- ☐ LC-RD08CI 8 [203] Cast Iron Dome and Gravel Guard
☐ LC-RD08PL 8 [203] Poly-Dome and Gravel Guard


Drain Body Material / Outlet Size / Outlet Type - (Pick ONE)

☐ LC-C2N D.C.C.I.	4	[102] Body Ht.	2	[51] No-Hub Outlet
☐ LC-C3N D.C.C.I.	4	[102] Body Ht.	3	[76] No-Hub Outlet
☐ LC-C4N D.C.C.I.	4	[102] Body Ht.	4	[102] No-Hub Outlet
☐ LC-C2P D.C.C.I.	4-5/64	[104] Body Ht.	2	[51] Push-On Outlet
☐ LC-C3P D.C.C.I.	4-3/64	[102] Body Ht.	3	[76] Push-On Outlet
☐ LC-C4P D.C.C.I.	4-1/64	[102] Body Ht.	4	[102] Push-On Outlet
☐ LC-A2S ABS	3-5/64	[78] Body Ht.	2	[51] Solvent Weld Outlet
☐ LC-A3S ABS	3-51/64	[96] Body Ht.	3	[76] Solvent Weld Outlet
☐ LC-A4S ABS	4-1/64	[102] Body Ht.	4	[102] Solvent Weld Outlet
☐ LC-P2S PVC	3-5/64	[78] Body Ht.	2	[51] Solvent Weld Outlet
☐ LC-P3S PVC	3-51/64	[96] Body Ht.	3	[76] Solvent Weld Outlet
☐ LC-P4S PVC	4-1/64	[102] Body Ht.	4	[102] Solvent Weld Outlet

(Check/specify appropriate drain options)

Suffixes

- ☐ LC-C Roof Drain Underdeck Clamp
☐ LC-RS Roof Sump Receiver

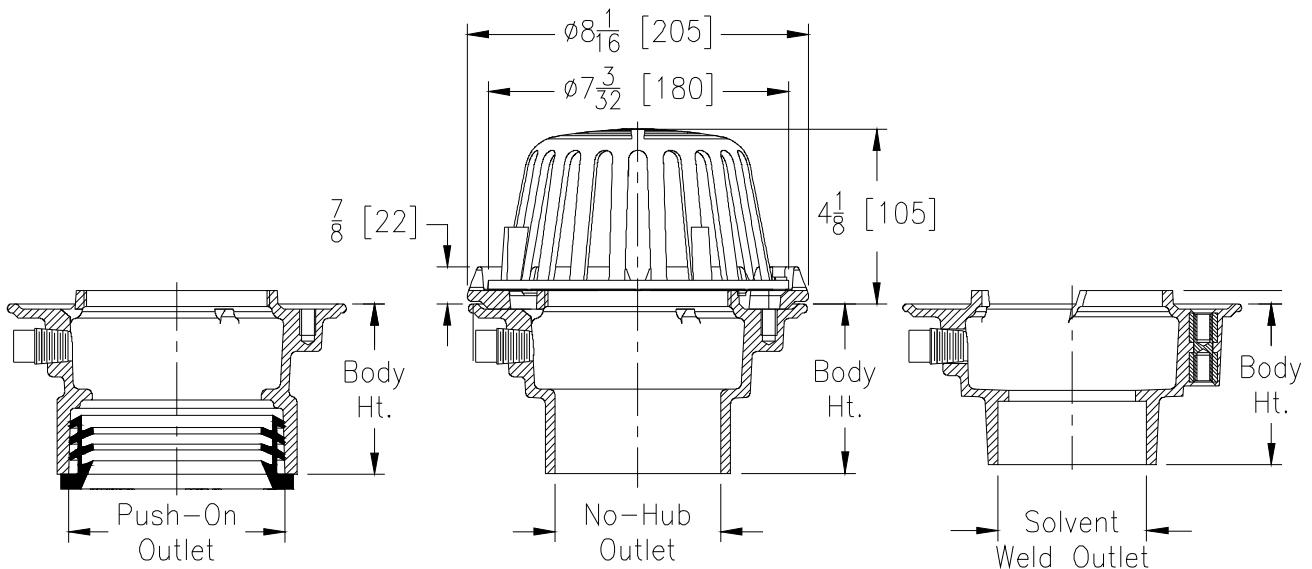

* Regularly furnished unless otherwise specified.



Round Adjustable Floor Cleanout w/ Nickel Bronze or Stainless Steel Top

Dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

PRODUCT DESCRIPTION:

(Dura-Coated Cast Iron, ABS, or PVC) cleanout body, gasketed removable ABS cleanout plug, (cast iron or ABS) threaded adjustable adaptor, and round (nickel bronze or stainless steel) secured, light-duty scoriated top with easy snap-on assembly. Materials to be selected as required for application.

Top Size and Material - (Pick ONE)

☐ LC-CR05NI	5 [127]	Polished Nickel Bronze Top	29/32 [23] Min. 2-9/16 [65] Max. Adjustment
☐ LC-CR06NI	6 [152]	Polished Nickel Bronze Top	29/32 [23] Min. 2-9/16 [65] Max. Adjustment
☐ LC-CR05SS	5 [127]	Stainless Steel Top	29/32 [23] Min. 2-9/16 [65] Max. Adjustment
☐ LC-CR06SS	6 [152]	Stainless Steel Top	29/32 [23] Min. 2-9/16 [65] Max. Adjustment

Threaded Shank Material - (Pick ONE)

☐ LC-CS	Cast Iron Adaptor	4 [102] NPSM Threads
☐ LC-PS	ABS Adaptor	4 [102] NPSM Threads

Drain Body Material / Outlet Size / Outlet Type - (Pick ONE)

☐ LC-C2N	D.C.C.I.	4 [102] Body Ht.	2 [51] No-Hub Outlet
☐ LC-C3N	D.C.C.I.	4 [102] Body Ht.	3 [76] No-Hub Outlet
☐ LC-C4N	D.C.C.I.	4 [102] Body Ht.	4 [102] No-Hub Outlet
☐ LC-C2P	D.C.C.I.	4-5/64 [104] Body Ht.	2 [51] Push-On Outlet
☐ LC-C3P	D.C.C.I.	4-3/64 [102] Body Ht.	3 [76] Push-On Outlet
☐ LC-C4P	D.C.C.I.	4-1/64 [102] Body Ht.	4 [102] Push-On Outlet
☐ LC-A2S	ABS	3-5/64 [78] Body Ht.	2 [51] Solvent Weld Outlet
☐ LC-A3S	ABS	3-51/64 [96] Body Ht.	3 [76] Solvent Weld Outlet
☐ LC-A4S	ABS	4-1/64 [102] Body Ht.	4 [102] Solvent Weld Outlet
☐ LC-P2S	PVC	3-5/64 [78] Body Ht.	2 [51] Solvent Weld Outlet
☐ LC-P3S	PVC	3-51/64 [96] Body Ht.	3 [76] Solvent Weld Outlet
☐ LC-P4S	PVC	4-1/64 [102] Body Ht.	4 [102] Solvent Weld Outlet


Plug Size - (Pick ONE) - Must match outlet size

☐ LC-2P	2 [51] Cleanout Plug
☐ LC-3P	3 [76] Cleanout Plug
☐ LC-4P	4 [102] Cleanout Plug

(Check/specify appropriate drain options)

Suffixes

☐ LC-CC	Cast Iron Membrane Clamp Collar
☐ LC-RC	Pre-Pour ABS Rough-in Cover
☐ LC-VP	Vandal-Proof Secured Top

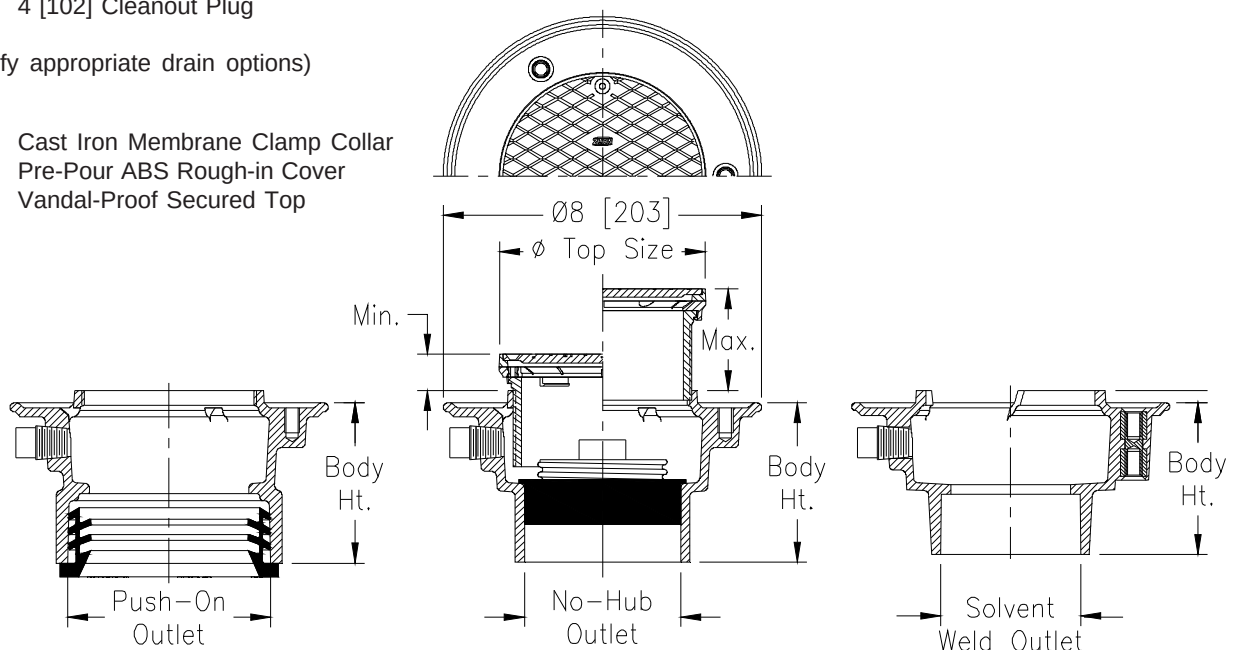

* Regularly furnished unless otherwise specified.



Round Adjustable Floor Cleanout w/ Ductile Iron Top

Dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

PRODUCT DESCRIPTION:

(Dura-Coated Cast Iron, ABS, or PVC) cleanout body, gasketed removable ABS cleanout plug, (cast iron or ABS) threaded adjustable adaptor, and round ductile iron secured, heavy-duty scoriated top with easy snap-on assembly. Materials to be selected as required for application.

Top Size and Material - (Pick ONE)

☐ LC-CR05DI 5 [127] Ductile Iron Top 1 [25] Min. 2-21/32 [67] Max. Adjustment

Threaded Shank Material - (Pick ONE)

☐ LC-CS Cast Iron Adaptor 4 [102] NPSM Threads

☐ LC-PS ABS Adaptor 4 [102] NPSM Threads

Drain Body Material / Outlet Size / Outlet Type - (Pick ONE)

☐ LC-C2N D.C.C.I. 4 [102] Body Ht. 2 [51] No-Hub Outlet

☐ LC-C3N D.C.C.I. 4 [102] Body Ht. 3 [76] No-Hub Outlet

☐ LC-C4N D.C.C.I. 4 [102] Body Ht. 4 [102] No-Hub Outlet

☐ LC-C2P D.C.C.I. 4-5/64 [104] Body Ht. 2 [51] Push-On Outlet

☐ LC-C3P D.C.C.I. 4-3/64 [102] Body Ht. 3 [76] Push-On Outlet

☐ LC-C4P D.C.C.I. 4-1/64 [102] Body Ht. 4 [102] Push-On Outlet

☐ LC-A2S ABS 3-5/64 [78] Body Ht. 2 [51] Solvent Weld Outlet

☐ LC-A3S ABS 3-51/64 [96] Body Ht. 3 [76] Solvent Weld Outlet

☐ LC-A4S ABS 4-1/64 [102] Body Ht. 4 [102] Solvent Weld Outlet

☐ LC-P2S PVC 3-5/64 [78] Body Ht. 2 [51] Solvent Weld Outlet

☐ LC-P3S PVC 3-51/64 [96] Body Ht. 3 [76] Solvent Weld Outlet

☐ LC-P4S PVC 4-1/64 [102] Body Ht. 4 [102] Solvent Weld Outlet

Plug Size - (Pick ONE) - Must match outlet size

☐ LC-2P 2 [51] Cleanout Plug

☐ LC-3P 3 [76] Cleanout Plug

☐ LC-4P 4 [102] Cleanout Plug


(Check/specify appropriate drain options)

Suffixes

☐ LC-CC Cast Iron Membrane Clamp Collar

☐ LC-RC Pre-Pour ABS Rough-in Cover

☐ LC-VP Vandal-Proof Secured Top

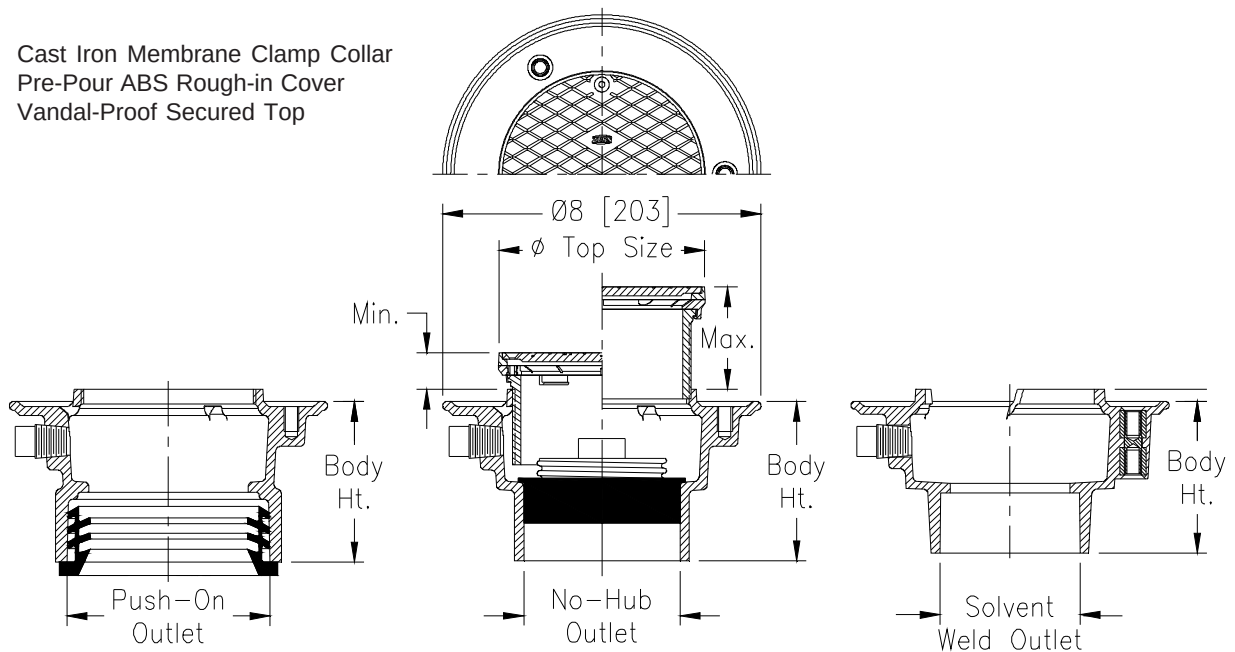

* Regularly furnished unless otherwise specified.



Square Adjustable Floor Cleanout w/ Nickel Bronze or Stainless Steel Top

Dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

PRODUCT DESCRIPTION:

(Dura-Coated Cast Iron, ABS, or PVC) cleanout body, gasketed removable ABS cleanout plug, (cast iron or ABS) threaded adjustable adaptor, and square (polished nickel bronze or stainless steel) secured, light-duty scoriated top with easy snap-on assembly. Materials to be selected as required for application.

Top Size and Material - (Pick ONE)

☐ LC-CS05NI	5 x 5 [127 x 127]	Polished Nickel Bronze Top	31/32 [25] Min. 2-5/8 [67] Max. Adjustment
☐ LC-CS06NI	6 x 6 [152 x 152]	Polished Nickel Bronze Top	31/32 [25] Min. 2-5/8 [67] Max. Adjustment
☐ LC-CS05SS	5 x 5 [127 x 127]	Stainless Steel Top	31/32 [25] Min. 2-5/8 [67] Max. Adjustment
☐ LC-CS06SS	6 x 6 [152 x 152]	Stainless Steel Top	31/32 [25] Min. 2-5/8 [67] Max. Adjustment

Threaded Shank Material - (Pick ONE)

☐ LC-CS	Cast Iron Adaptor	4 [102] NPSM Threads
☐ LC-PS	ABS Adaptor	4 [102] NPSM Threads

Drain Body Material / Outlet Size / Outlet Type - (Pick ONE)

☐ LC-C2N	D.C.C.I.	4 [102] Body Ht.	2 [51] No-Hub Outlet
☐ LC-C3N	D.C.C.I.	4 [102] Body Ht.	3 [76] No-Hub Outlet
☐ LC-C4N	D.C.C.I.	4 [102] Body Ht.	4 [102] No-Hub Outlet
☐ LC-C2P	D.C.C.I.	4-5/64 [104] Body Ht.	2 [51] Push-On Outlet
☐ LC-C3P	D.C.C.I.	4-3/64 [102] Body Ht.	3 [76] Push-On Outlet
☐ LC-C4P	D.C.C.I.	4-1/64 [102] Body Ht.	4 [102] Push-On Outlet
☐ LC-A2S	ABS	3-5/64 [78] Body Ht.	2 [51] Solvent Weld Outlet
☐ LC-A3S	ABS	3-51/64 [96] Body Ht.	3 [76] Solvent Weld Outlet
☐ LC-A4S	ABS	4-1/64 [102] Body Ht.	4 [102] Solvent Weld Outlet
☐ LC-P2S	PVC	3-5/64 [78] Body Ht.	2 [51] Solvent Weld Outlet
☐ LC-P3S	PVC	3-51/64 [96] Body Ht.	3 [76] Solvent Weld Outlet
☐ LC-P4S	PVC	4-1/64 [102] Body Ht.	4 [102] Solvent Weld Outlet


Plug Size - (Pick ONE) - Must match outlet size

☐ LC-2P	2 [51] Cleanout Plug
☐ LC-3P	3 [76] Cleanout Plug
☐ LC-4P	4 [102] Cleanout Plug

(Check/specify appropriate drain options)

Suffixes

☐ LC-CC	Cast Iron Membrane Clamp Collar
☐ LC-RC	Pre-Pour ABS Rough-in Cover
☐ LC-VP	Vandal-Proof Secured Top

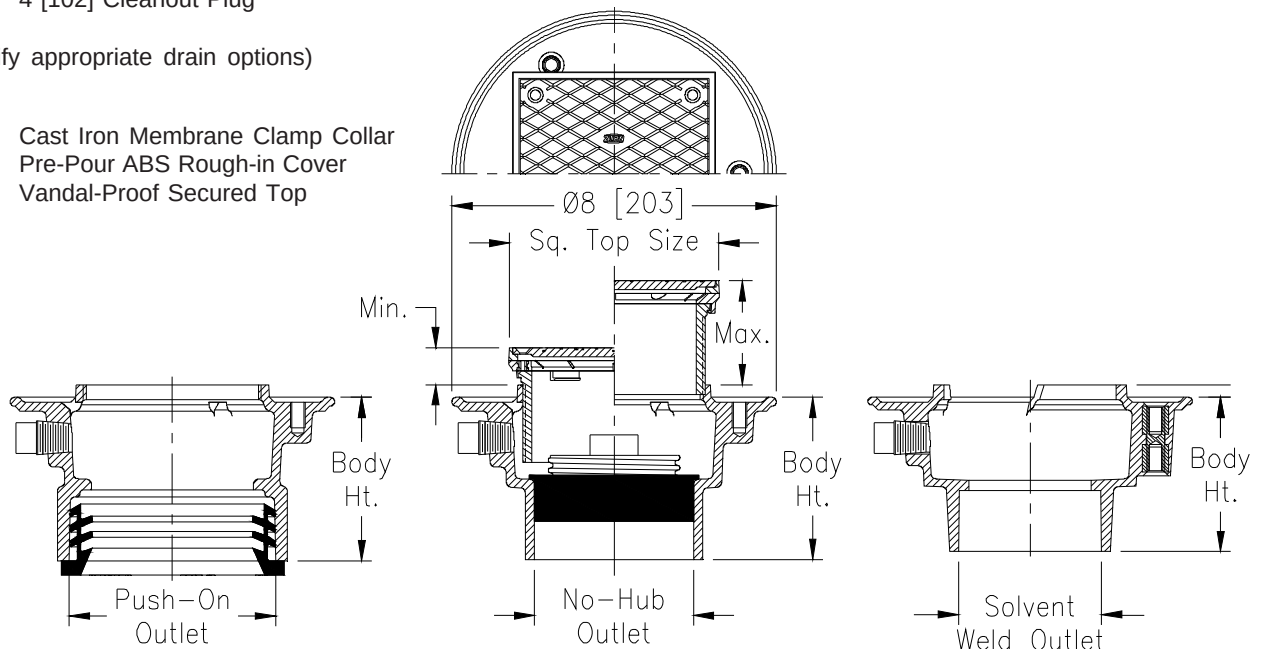

* Regularly furnished unless otherwise specified.