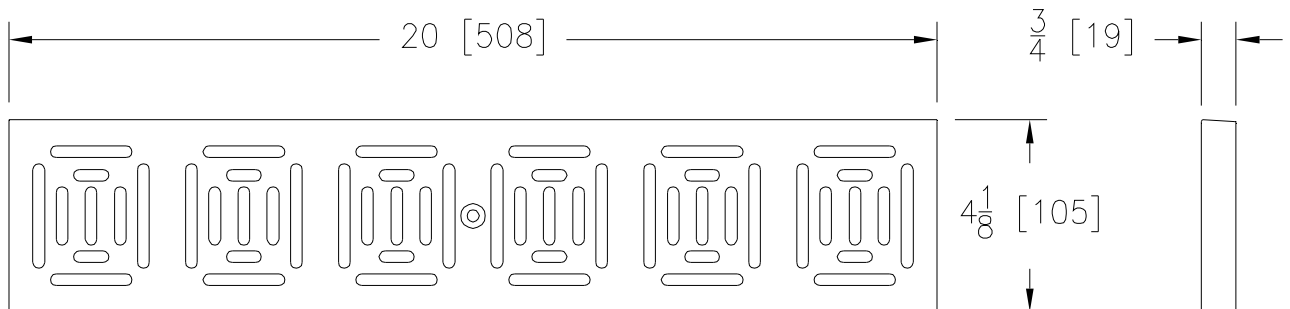


**P4-BZ****4-1/8 [103.5] WIDE BRONZE DECORATIVE GRATE****SPECIFICATION SHEET****TAG _____**

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

Please Check ✓	Item No.	Part Number	Item I.D.
	1	64304	P4-BZ

**GRATE ENGINEERING SPECIFICATION: ZURN P4-BZ**

20" [1016mm] X 4-1/8" [105mm] Bronze Decorative Grate weighing 4.5 lbs. per linear foot [6.7 kg/m]. The grate has an open area of 11.5 square inches per linear foot [243.4 cm²/m] DIN Rating of Class A, ANSI rating of Light-Duty.

BZ - Bronze Decorative Grate	
Material:	Bronze
DIN Rating:	Class A
Weight:	4.5 lbs/ft. [6.7 kg/m]
Open Area:	11.5 in ² /ft. [243.4 cm ² /m]
ANSI Rating:	Light-Duty
Application:	Decorative Heel-Proof
Slot Width/Hole Size:	0.25" [6.4mm]
ADA:	No
H-20:	No
FAA:	No


* Regularly furnished unless otherwise specified.

Page 1 of 8

**P4-CG****4-1/8 [103.5] WIDE CAST IRON SLOTTED GRATE****SPECIFICATION SHEET****TAG _____**

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

Please Check ✓	Item No.	Part Number	Item I.D.
	2	66402	P4-CG

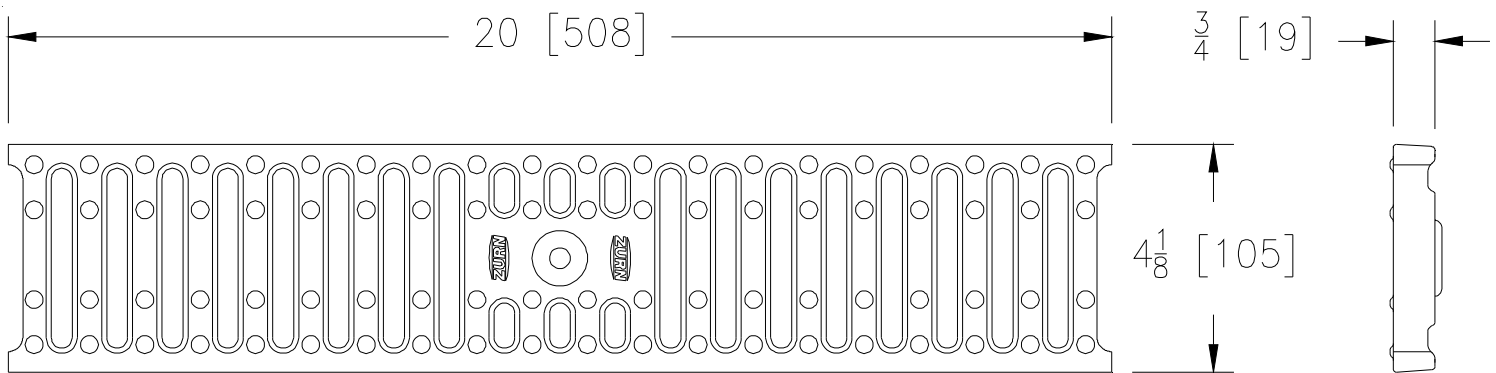**GRATE ENGINEERING SPECIFICATION: ZURN P4-CG**

40" [1016mm] X 4-1/8" [105mm] Cast Iron Slotted Grate weighing 5.2 lbs. per linear foot [7.7 kg/m]. The grate has an open area of 12.2 square inches per linear foot [258.2 cm²/m] DIN Rating of Class B, ANSI rating of Medium-Duty.

CG - Cast Iron Slotted Grate	
Material:	Cast Iron
DIN Rating:	Class B
Weight:	5.2 lbs/ft. [7.7 kg/m]
Open Area:	12.2 in ² /ft. [258.2 cm ² /m]
ANSI Rating:	Medium-Duty
Application:	Light Vehicle Traffic
Slot Width/Hole Size:	0.375" [9.5mm]
ADA:	No
H-20:	No
FAA:	No

* Regularly furnished unless otherwise specified.

Page 2 of 8



P4-FG


4-1/8 [103.5] WIDE FABRICATED GALVANIZED STEEL
SLOTTED GRATE

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

Please Check ✓	Item No.	Part Number	Item I.D.
	3	62294	P4-FG

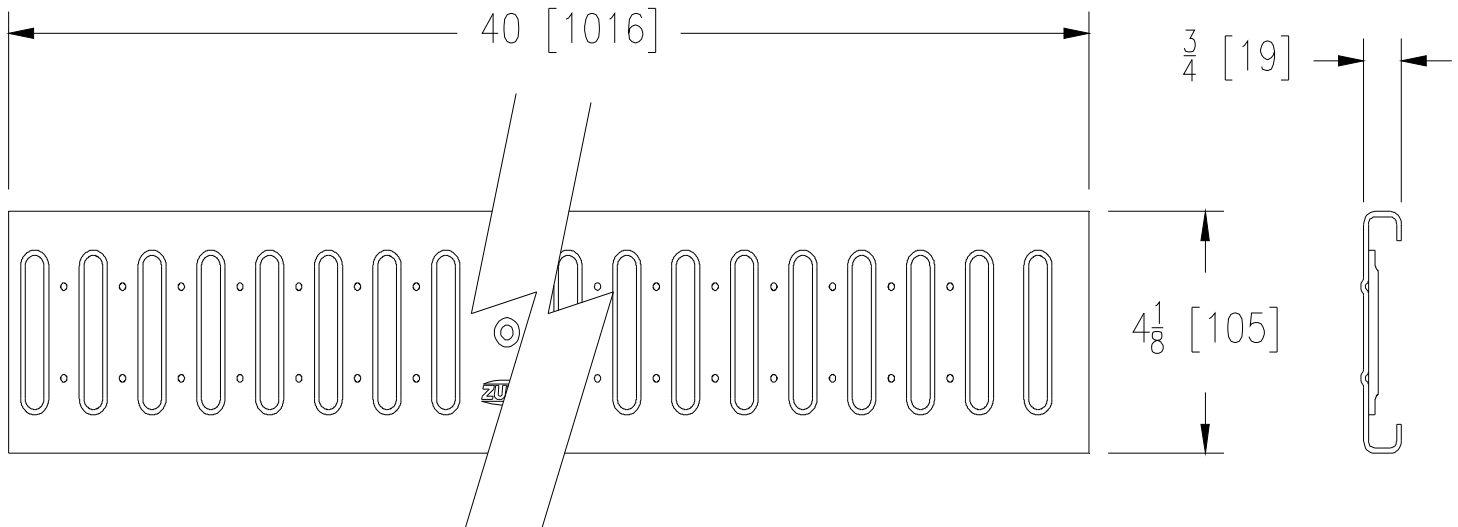

GRATE ENGINEERING SPECIFICATION: ZURN P4-FG

40" [1016mm] X 4-1/8" [105mm] Fabricated Galvanizes Slotted Grate weighing 1.8 lbs. per linear foot [2.7 kg/m]. The grate has an open area of 10.2 square inches per linear foot [215.9 cm²/m] DIN Rating of Class A, ANSI rating of Light-Duty.

FG - Fabricated Galvanized Steel Slotted Grate	
Material:	Galvanized Steel
DIN Rating:	Class A
Weight:	1.8 lbs/ft. [2.7 kg/m]
Open Area:	10.2 in ² /ft. [215.9 cm ² /m]
ANSI Rating:	Light-Duty
Application:	Pedestrian
Slot Width/Hole Size:	0.375" [9.5mm]
ADA:	No
H-20:	No
FAA:	No

* Regularly furnished unless otherwise specified.

Page 3 of 8



P4-FS


4-1/8 [103.5] WIDE FABRICATED STAINLESS STEEL
SLOTTED GRATE

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

Please Check ✓	Item No.	Part Number	Item I.D.
	4	62294	P4-FS

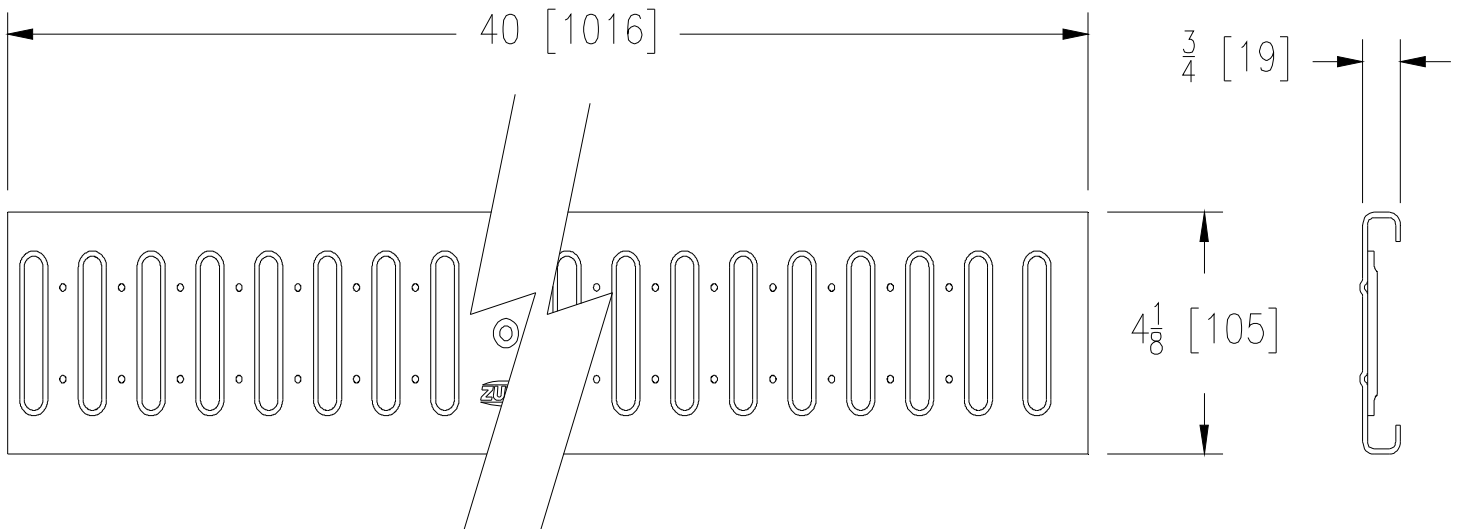

GRATE ENGINEERING SPECIFICATION: ZURN P4-FS

40" [1016mm] X 4-1/8" [105mm] Fabricated Stainless Steel Slotted Grate weighing 1.8 lbs. per linear foot [2.7 kg/m]. The grate has an open area of 10.2 square inches per linear foot [215.9 cm²/m] DIN Rating of Class A, ANSI rating of Light-Duty.

FS - Fabricated Stainless Steel Slotted Grate	
Material:	Stainless Steel
DIN Rating:	Class A
Weight:	1.8 lbs/ft. [2.7 kg/m]
Open Area:	10.2 in ² /ft. [215.9 cm ² /m]
ANSI Rating:	Light-Duty
Application:	Pedestrian, Food/Bev. Process
Slot Width/Hole Size:	0.375" [9.5mm]
ADA:	No
H-20:	No
FAA:	No

* Regularly furnished unless otherwise specified.

Page 4 of 8



P4-HPP


4-1/8 [103.5] WIDE HEEL-PROOF SLOTTED GRATE

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

Please Check ✓	Item No.	Part Number	Item I.D.
	5	64109	P4-HPP

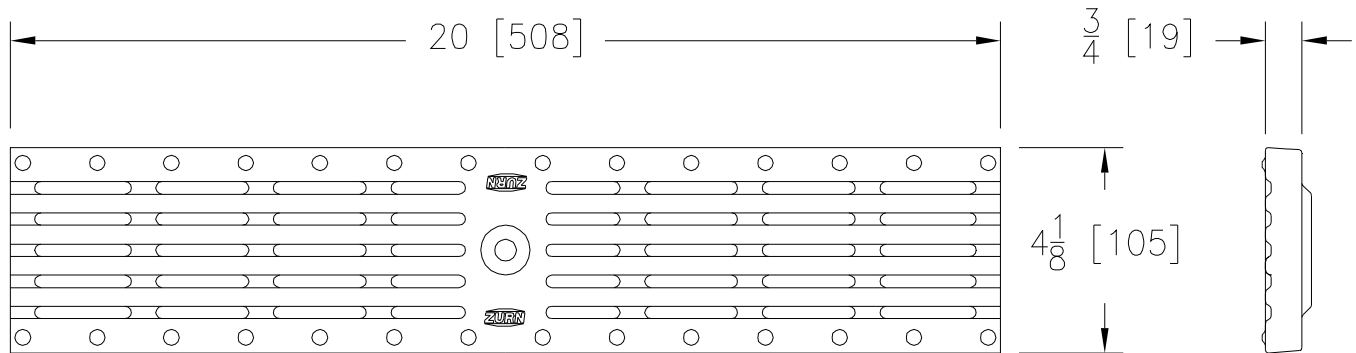

GRATE ENGINEERING SPECIFICATION: ZURN P4-HPP

20" [508mm] X 4-1/8" [105mm] High Density Polyethylene (HDPE) Heel-Proof Grate weighing 0.78 lbs. per linear foot [1.2 kg/m]. The grate has an open area of 10.3 square inches per linear foot [218 cm²/m] DIN Rating of Class A, ANSI rating of Light-Duty, ADA compliant.

HPP - Heel-Proof Slotted Grate	
Material:	HDPE
DIN Rating:	Class A
Weight:	0.78 lbs/ft. [1.2 kg/m]
Open Area:	10.3 in ² /ft. 218 cm ² /m]
ANSI Rating:	Light-Duty
Application:	Pedestrian, Chem., Swimming Pool
Slot Width/Hole Size:	0.25" [6.4mm]
ADA:	Yes
H-20:	No
FAA:	No

* Regularly furnished unless otherwise specified.

Page 5 of 8



P4-PG


4-1/8 [103.5] WIDE PERFORATED GALVANIZED STEEL
GRATE

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

Please Check	Item No.	Part Number	Item I.D.
✓	6	62295	P4-PG

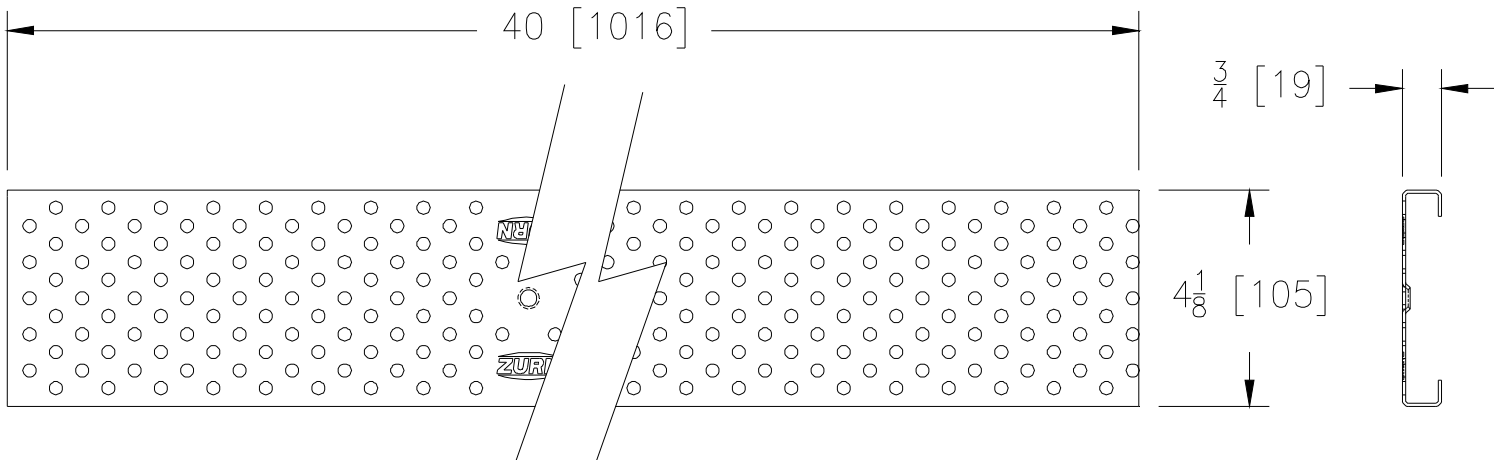

GRATE ENGINEERING SPECIFICATION: ZURN P4-PG

40" [1016mm] X 4-1/8" [105mm] Galvanized Steel Perforated Grate weighing 1.2 lbs. per linear foot [1.8 kg/m]. The grate has an open area of 5.9 square inches per linear foot [124.9 cm²/m] DIN Rating of Class A, ANSI rating of Light-Duty, ADA compliant.

PG - Perforated Galvanized Steel Grate	
Material:	Galvanized Steel
DIN Rating:	Class A
Weight:	1.2 lbs/ft. [1.8 kg/m]
Open Area:	5.9 in ² /ft. [124.9 cm ² /m]
ANSI Rating:	Light-Duty
Application:	Heel-Proof, Pedestrian Traffic
Slot Width/Hole Size:	0.25" [6.4mm]
ADA:	Yes
H-20:	No
FAA:	No

* Regularly furnished unless otherwise specified.

Page 6 of 8



P4-PS


4-1/8 [103.5] WIDE PERFORATED STAINLESS STEEL GRATE

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

Please Check ✓	Item No.	Part Number	Item I.D.
	7	62295	P4-PS

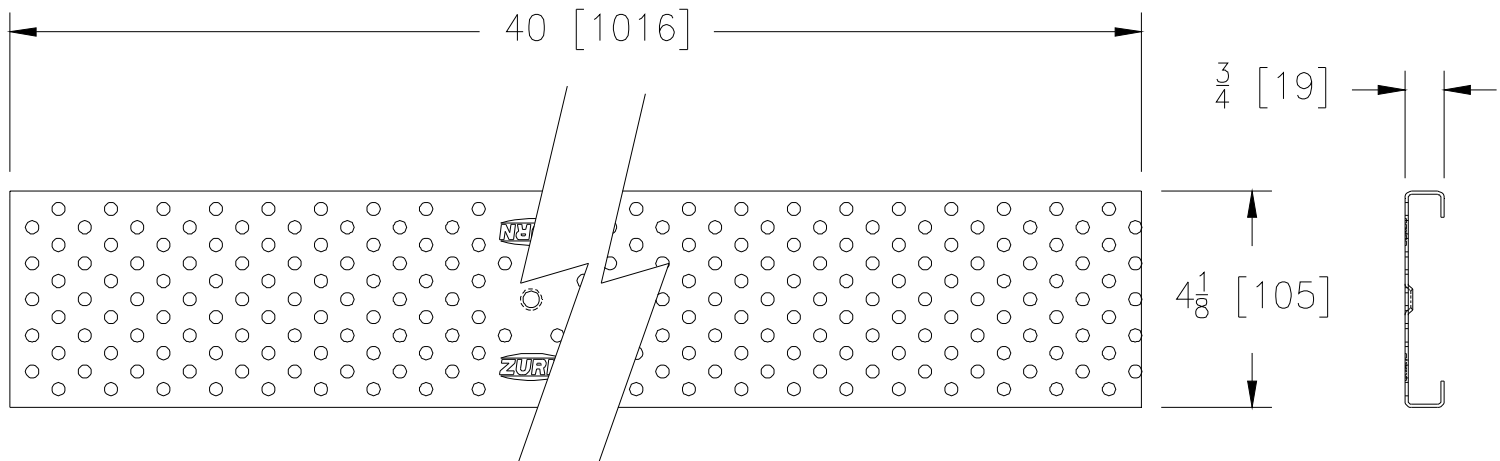

GRATE ENGINEERING SPECIFICATION: ZURN P4-PS

40" [1016mm] x 4-1/8" [105mm] Stainless Steel Perforated Grate weighing 1.2 lbs. per linear foot [1.8kg/m]. The grate has an open area of 5.9 square inches per liner foot [124.9 cm²/m], DIN rating of Class A, ANSI rating Light-Duty, ADA compliant.

PS - Perforated Stainless Steel Grate	
Material:	Stainless Steel
DIN Rating:	Class A
Weight:	1.2 lbs./ft. [1.8 kg/m]
Open Area:	5.9 in ² /ft. [124.9 cm ² /m]
ANSI Rating:	Light-Duty
Application:	Heel-Proof, Food/Bev. Process
Slot Width/Hole Size:	0.25" [6.4mm]
ADA:	Yes
H-20:	No
FAA:	No

* Regularly furnished unless otherwise specified.

Page 7 of 8



P4-SC


4-1/8 [103.5] WIDE S.S. SOLID COVER

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

Please Check ✓	Item No.	Part Number	Item I.D.
	8	314389	P4-SC

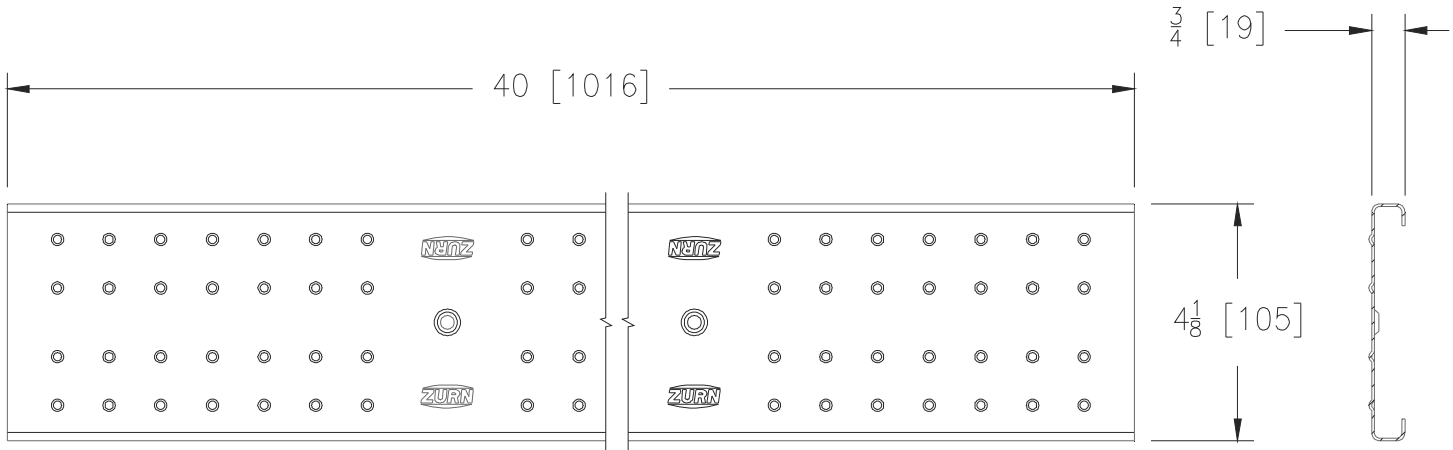

SC GRATE ENGINEERING SPECIFICATION: ZURN P4-SC

40" [1016mm] X 4-1/8" [105mm] Stainless steel fabricated solid cover weighing 1.74 lbs per linear foot [2.6 kg/m]. Grate conforms to DIN rating A, ANSI Rating of Light-Duty, ADA Compliant and ASTM specification A240 Type 304 (316 by request).

SC - S.S. Solid Cover	
Material:	Type 304 Stainless Steel
DIN Rating:	Class A
Weight:	1.74 lbs/ft. [2.6 kg/m]
Open Area:	N/A
ANSI Rating:	Light-Duty
Application:	Heel-Proof Pedestrian
Slot Width/Hole Size:	N/A
ADA:	Yes
H-20:	No
FAA:	No

* Regularly furnished unless otherwise specified.

Page 8 of 8