



Z6913-XL

AquaSense Battery Powered Faucet

Engineering Specification

ADA compliant, battery powered, chrome plated sensor faucet for retrofit and new construction.

- Flow Rate
1.5 gpm Vandal Resistant Aerator
- Occupant Detection
Infrared convergence-type proximity sensor
Thirty Second Time out feature
- Spout module
Chrome Plated Cast Brass
- Also Includes
In-line filter
4 "AA" batteries
Inlet for a 1/2"[13] ball riser
Single supply hose



Shown with -CP4 option

Flow Control Options: Slim Flow Outlets

- ☐ -FS 0.5 gpm/1.9 Lpm Vandal-Resistant Non-Aerated
- ☐ -JS 1.5 gpm/ 5.7 Lpm Vandal-Resistant Laminar Flow
- ☐ -LS 1.0 gpm/ 3.8 Lpm Vandal-Resistant Aerated
- ☐ -MS 0.35 gpm/1.3 Lpm Vandal-Resistant Non-Aerated

***NOTE:** Old style flow outlets also available.

Power Supply Choices (Sold Separately)

- ☐ -ACA 6 VDC Plug-In Power Converter
- ☐ -HW6 Hardwired Power Converter

Optional Power Supply Accessories

- ☐ -CWB Connector Wire for Hardwire Install
- ☐ -MJ Mini Junction Box

NOTE: For Hardwire applications furnish P6000-HW6 power converter. Order P6000-HW6 power converter separately.
The P6000-HW6 and P6000-MJ will power up to 8 sensor faucets.

The information contained in this document is subject to change without notice.
Please contact Zurn for most up to date information.

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION
5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330
Phone: 1-800-997-3876 ♦ Fax: 919-775-3541
www.zurn.com
In Canada: ZURN INDUSTRIES LIMITED
3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2
Phone: 905-405-8272 Fax: 905-405-1292

AquaSense® is a registered trademark of Zurn Industries, LLC.

Accessories

- ☐ -ADM Above Deck Mixer
- ☐ -ADM-1 Above Deck Mixer w/4" Cover Plate
- ☐ -ADM-2 Above Deck Mixer w/8" Cover Plate
- ☐ -CG CareGuard Aerator
- ☐ -CP4 Cover Plate 4"[102] Centers
- ☐ -CP8 Cover Plate 8"[203] Centers
- ☐ -DSA Drug Screening Applications
- ☐ -H4 Wrist Blade handle for ADM
- ☐ -MT Mixing Tee
- ☐ -MV Temperature Mixing Valve
- ☐ -SH Supply Hoses for Mixing Valve
- ☐ -TMV Thermostatic Mixing Valve for Multiple Faucets
- ☐ -TMV-1 Thermostatic Mixing Valve for Single Faucets
- ☐ -_____ Other

Careguard currently only available with -E, 1.5 Vandal Resistant Laminar Aerator.


Zurn Lead Compliant products (-XL) are manufactured to comply with state laws and local codes that mandate lead content levels less than one quarter of one percent (0.25%) total lead content by weighted average.

Architectural/Engineering Approval



TYPICAL Z6913

AquaSense Battery Powered Faucet

NOTE: Recommended through hole diameter to properly mount the spout/shank is 1-1/8" to 1-1/4".

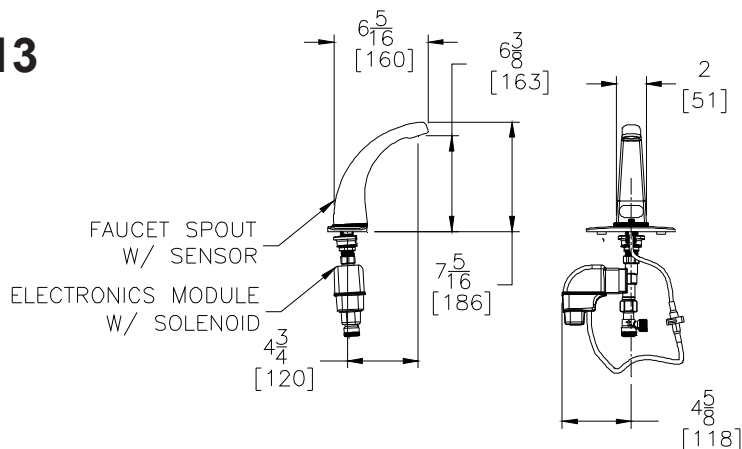


Optional Mixing Valves



P6900-MV
Temperature Mixing Valve

TYPICAL Z6913-ACA

AquaSense Plug-In Powered Faucet

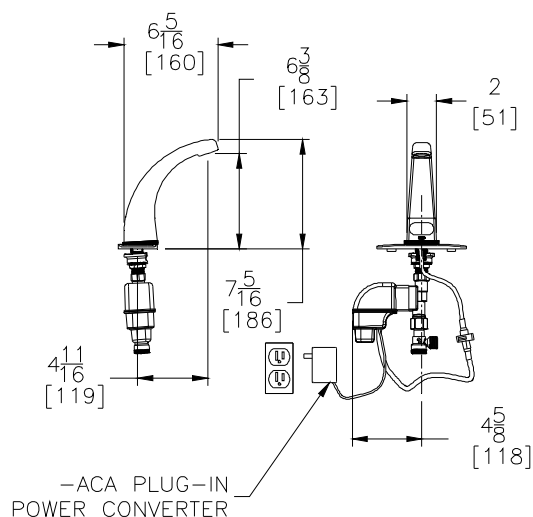

TYPICAL Z6913-CWB

AquaSense Hardwire Powered Faucet

Optional:

* Optional -MJ mini junction box for connecting up to 8 faucets

NOTE: MUST USE EITHER ZURN P6000-HW6 HARDWIRE POWER CONVERTER OR ZURN P6000-ACA PLUG-IN POWER CONVERTER TO ENSURE PROPER OPERATION. USING A POWER CONVERTER OTHER THAN ZURN MAY RESULT IN OPERATION MALFUNCTION OR UNIT FAILURE.

