



# Z6915-XL

## AquaSense Battery Powered Faucet

TAG \_\_\_\_\_

### Architectural/Engineering Specification:

Zurn AquaSense® faucets are ideal for high-use applications where durability and hands-free operation are necessary. ADA compliant, battery powered, polished chrome-plated cast brass sensor faucet with infrared proximity sensor for retrofit and new construction. Unit is furnished with a standard 1.5 GPM aerator, and mounting hardware.

Zurn Lead Free products (-XL) is the line of durable, high quality brass faucets and fixtures that are designed and manufactured to comply with Section 1417 of the Safe Drinking Water Act (SDWA) which mandates the weighted average lead content of no more than 0.25% of the wetted surface.

### Product Features:

- Infrared convergence-type proximity sensor
- 30 second time out feature
- Chrome-plated Cast Brass Body
- In-line filter
- 4 "AA" batteries
- Inlet for a 1/2" ball riser

### Suffix Options:

- DSA Drug Screening Applications
- H4 Wrist Blade handle for ADM
- MV Temperature Mixing Valve
- SH Supply Hoses for Mixing Valve
- TMV-1 Thermostatic Mixing Valve for Single Faucets

### Compliance and Certification:

- Low-Lead Compliant
- ADA Compliant



XL LEAD FREE



ADA DESIGNED



WaterSense  
Meets EPA Criteria  
Certified by  
NAPM PLT



### Aerator Options:

|     | Flowrate<br>GPM [L.p.M] | Vandal<br>Resistant | WaterSense*<br>Labeled | Outlet Type |
|-----|-------------------------|---------------------|------------------------|-------------|
| -ES | 1.5[5.7]                | ✓                   | ✓                      | Spray       |
| -FS | 0.5[1.9]                | ✓                   |                        | Spray       |
| -JS | 1.5[5.7]                | ✓                   | ✓                      | Laminar     |
| -K  | 1.0[3.8]                | ✓                   | ✓                      | Laminar     |
| -LS | 1.0[3.8]                | ✓                   |                        | Aerator     |
| -MS | 0.35[1.3]               | ✓                   |                        | Spray       |
| -N  | 0.5[1.9]                | ✓                   |                        | Laminar     |

### Power Supply Choices (Sold Separately):

- ACA 6 VDC Plug-In Power Converter
- HW6 Hardwired Power Converter

### Optional Power Supply Accessories:

- CWB Connector Wire for Plug-In Power Converter
- MJ Mini Junction Box

\*This device is WaterSense labeled when used with the appropriate flow rate and certified for residential and private restrooms.

**NOTE: For Hardwire applications furnish P6000-HW6 power converter. Order P6000-HW6 power converter separately.**

**The P6000-HW6 and P6000-MJ will power up to 8 sensor faucets.**

Architectural/Engineering Approval

The information contained in this document is subject to change without notice.  
Please contact Zurn for most up to date information.



# Z6915-XL


AquaSense Battery Powered Faucet

TAG \_\_\_\_\_


## TYPICAL Z6915-XL

AquaSense Battery  
Powered Faucet


NOTE: Recommended  
through hole diameter  
to properly mount the  
spout/shank is 1-1/8"  
to 1-1/4".

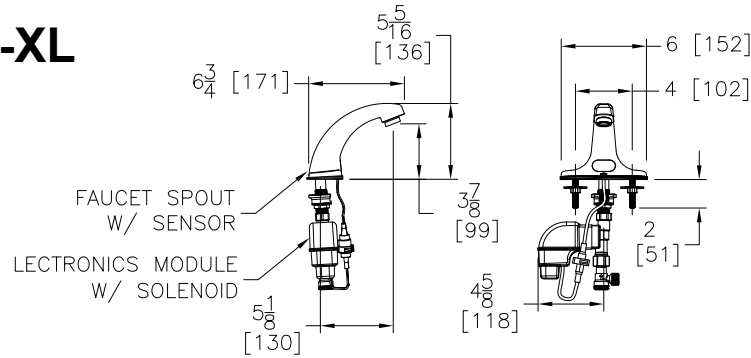

### Optional Mixing Valves




P6900-MT  
Mixing Tee



P6900-MV  
Temperature Mixing Valve

## TYPICAL Z6915-XL-ACA

AquaSense Plug-In  
Powered Faucet

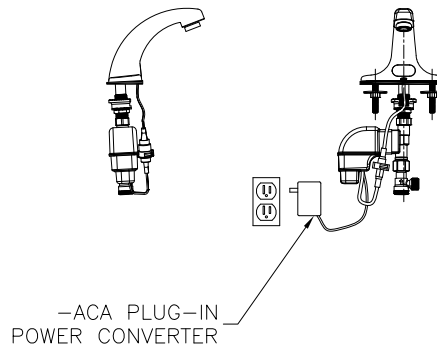

## TYPICAL Z6915-XL-CWB

AquaSense Hardwire  
Powered Faucet

Optional:

\* Optional -MJ mini junction box  
for connecting up to 8 faucets

NOTE: MUST USE EITHER ZURN  
P6000-HW6 HARDWIRE POWER  
CONVERTER OR ZURN P6000-ACA  
PLUG-IN POWER CONVERTER TO  
ENSURE PROPER OPERATION. USING  
A POWER CONVERTER OTHER THAN  
ZURN MAY RESULT IN OPERATION  
MALFUNCTION OR UNIT FAILURE.

