



Z6920-XL

AquaSense Battery Powered Faucet

TAG _____

Architectural/Engineering Specification:

Zurn AquaSense® faucets are ideal for high-use applications where durability and hands-free operation are necessary. ADA compliant, battery powered, polished chrome-plated cast brass sensor faucet with infrared proximity sensor for retrofit and new construction. Unit is furnished with a standard 1.5 GPM aerator, and mounting hardware.

Zurn Lead Free products (-XL) is the line of durable, high quality brass faucets and fixtures that are designed and manufactured to comply with Section 1417 of the Safe Drinking Water Act (SDWA) which mandates the weighted average lead content of no more than 0.25% of the wetted surface.

Standard Product Features:

- Infrared convergence-type proximity sensor
- 30 second time out feature
- Chrome-plated Cast Brass Body
- In-line filter
- 4 "AA" batteries
- Inlet for a 1/2" ball riser

Suffix Options:

- ADM Above Deck Mixer
- ADM-1 Above Deck Mixer w/4" Cover Plate
- ADM-2 Above Deck Mixer w/8" Cover Plate
- CP4 Cover Plate 4"[102] Centers
- CP8 Cover Plate 8"[203] Centers
- DSA Drug Screening Applications
- FC Flow Control in base of Spout
- GA 3-1/2" Goosneck Spout
- GC 8" Goosneck Spout
- H4 Wrist Blade handle for ADM
- IA3 Inlet Adaptor (3/8"[10] compression)
- MV Temperature Mixing Valve
- SH Supply Hoses for Mixing Valve
- TMV-1 Thermostatic Mixing Valve for Single Faucets

Compliance and Certification:

- Low-Lead Compliant
- ADA Compliant



XL LEAD FREE

ADA DESIGNED

WaterSense
Meets EPA Criteria
Certified by
IAPMO RWT



Aerator Options:

	Flowrate GPM [LpM]	Vandal Resistant	WaterSense* Labeled	Outlet Type
-E	1.5[5.7]	✓	✓	Aerator
-F	0.5[1.9]	✓		Spray
-J	1.5[5.7]	✓	✓	Laminar
-K	1.0[3.8]	✓	✓	Laminar
-L	1.0[3.8]	✓		Aerator
-M	0.35[1.3]	✓		Spray
-N	0.5[1.9]	✓		Laminar

*This device is WaterSense labeled when used with the appropriate flow rate and certified for residential and private restrooms.

Power Supply Choices (Sold Separately):

- ACA 6 VDC Plug-In Power Converter
- HW6 Hardwired Power Converter

Optional Power Supply Accessories:

- CWB Connector Wire for Plug-In Power Converter
- MJ Mini Junction Box

NOTE: For Hardwire applications furnish P6000-HW6 power converter. Order P6000-HW6 power converter separately.

The P6000-HW6 and P6000-MJ will power up to 8 sensor faucets.

Architectural/Engineering Approval

The information contained in this document is subject to change without notice.
Please contact Zurn for most up to date information.



Z6920-XL


AquaSense Battery Powered Faucet

TAG _____


TYPICAL Z6920-XL

AquaSense Battery
Powered Faucet


NOTE: Recommended
through hole diameter
to properly mount the
spout/shank is 1-1/8"
to 1-1/4".

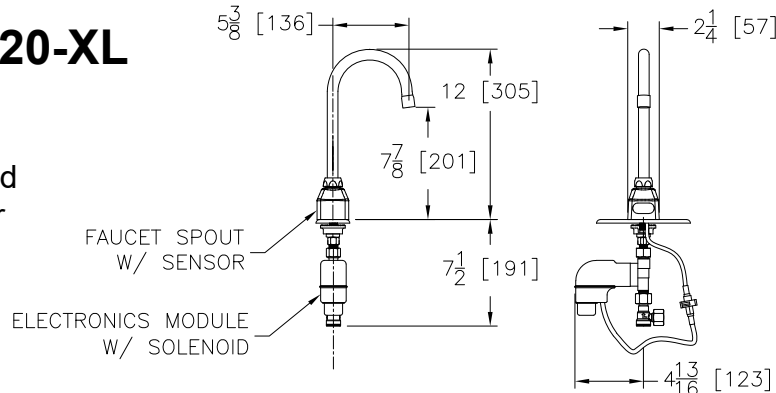

Optional Mixing Valves




P6900-MT
Mixing Tee



P6900-MV
Temperature Mixing Valve

TYPICAL Z6920-XL-ACA

AquaSense Plug-In
Powered Faucet

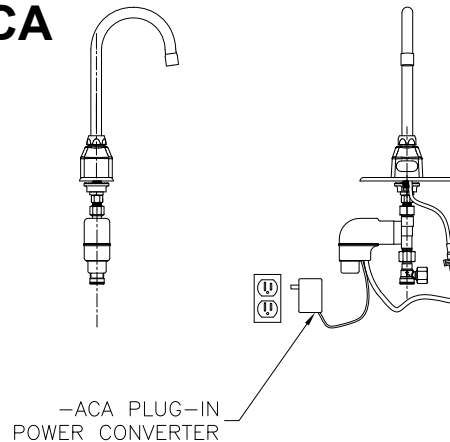

TYPICAL Z6920-XL-CWB

AquaSense Hardwire
Powered Faucet

Optional:

* Optional -MJ mini junction box
for connecting up to 8 faucets

NOTE: MUST USE EITHER ZURN
P6000-HW6 HARDWIRE POWER
CONVERTER OR ZURN P6000-ACA
PLUG-IN POWER CONVERTER TO
ENSURE PROPER OPERATION. USING
A POWER CONVERTER OTHER THAN
ZURN MAY RESULT IN OPERATION
MALFUNCTION OR UNIT FAILURE.

