



# Z826B1-XL

Laboratory Faucet - Double

TAG \_\_\_\_\_


### Architectural/Engineering Specification:

Polished chrome-plated double laboratory faucet with integral shank, quarter turn ceramic disc cartridges and a 5-3/8" centerline rigid or swing gooseneck spout. Unit is furnished with a standard 2.2 GPM aerator, vandal-resistant color-coded handles, mounting hardware and stainless steel flex connexion hoses.

Zurn Lead Free products (-XL) is the line of durable, high quality brass faucets and fixtures that are designed and manufactured to comply with Section 1417 of the Safe Drinking Water Act (SDWA) which mandates the weighted average lead content of no more than 0.25% of the wetted surface.

### Product Features:

- Heavy-duty Quarter Turn Ceramic Disc Cartridge
- Chrome-plated Cast Brass Body With Integral Shank
- Vandal-resistant Color-Coded Metal Handles
- Stainless Steel Flex Connection Hoses

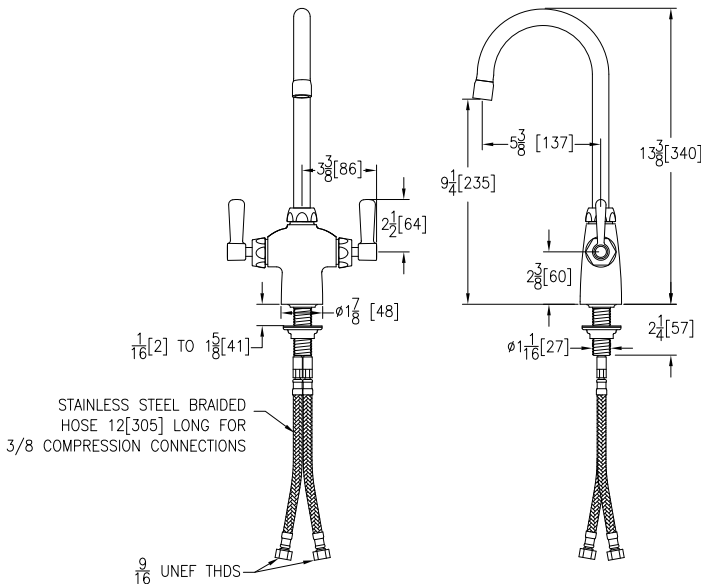

Rough-in/Overview dimensions

### Compliance and Certification:

- Low-Lead Compliant
- ADA Compliant



XL LEAD FREE



ADA DESIGNED

### Aerator Options:

	Flow rate GPM [LpM]	Vandal Resistant	Pressure Compression	Outlet Type
-2F	2.2[8.3]	✓	✓	Aerator
-3F	0.5[1.9]	✓	✓	Spray
-4F	2.2[8.3]	✓	✓	Laminar
-16F	1.0[3.8]	✓	✓	Spray
-17F	1.5[5.7]	✓	✓	Aerator
-18F	1.5[5.7]	✓	✓	Laminar
-22F	1.0[3.8]	✓		Laminar
-25F	1.0[3.8]	✓	✓	Spray
-28F	1.0[3.8]	✓		Laminar

### Suffix Options:

- AR Anti-Rotation Pins
- CST Copper Supply Tubes
- FC 2.0 GPM [7.6L] Laminar Flow Control in Base of Spout
- G 1-1/4" [32mm] Grid Strainer Drain
- MY Mixing Yoke Assembly Instead of Copper Supplies

### Architectural/Engineering Approval

The information contained in this document is subject to change without notice. Please contact Zurn for most up to date information.