Model(s) Z6913-XL

AquaSense® Deck-Mount Sensor Faucet

TAG

ARCHITECTURAL/ENGINEERING SPECIFICATION:

Zurn AquaSense® faucets are ideal for high-use applications where durability and hands-free operation are necessary. ADA compliant, battery-powered, polished chrome-plated cast brass sensor faucet with infrared proximity sensor for retrofit and new construction. Unit is furnished with a standard 0.5 GPM aerator and mounting hardware. Zurn Lead Free (-XL) is the line of durable, high quality brass faucets and fixtures that are designed and manufactured to comply with Section 1417 of the Safe Drinking Water Act (SDWA) which mandates a weighted average lead content of no more than 0.25% of the wetted surface.



PRODUCT FEATURES:

- Infrared convergence-type proximity sensor
- 30-second time out feature
- Chrome-plated, cast brass body
- In-line filter
- 4 "AA" batteries
- Inlet for a 1/2" ball riser

FLOW OPTIONS:

	Suffix	Flow GPM [L]	Vandal-Resistant	WaterSense*	Outlet Type
	-E	1.5 GPM [5.7L]	x	x	Aerator
	-F	0.5 GPM [1.9L]	x		Spray
	-J	1.5 GPM [5.7L]	x	x	Laminar
	-K	1.0 GPM [3.8L]	x	x	Laminar
	-L	1.0 GPM [3.8L]	x	x	Aerator
	-M	0.35 GPM [1.3L]	x		Spray
	-N	0.5 GPM [1.9L]	x		Laminar

SUFFIX OPTIONS:

	-ADM	Above-Deck Mixer
	-ADM-1	Above-Deck Mixer with 4" [102mm] Cover Plate
	-ADM-2	Above-Deck Mixer with 8" [203mm] Cover Plate
	-CP4	Cover Plate 4" [102mm] Centers
	-CP8	Cover Plate 8" [203mm] Centers
	-H4	Wrist Blade handle for ADM
	-MV	Temperature Mixing Valve
	-SH	Three Supply Hoses for Mixing Valve
	-TMV-1	Thermostatic Mixing Valve for Single Faucets (ASSE Listed 1070)

POWER OPTIONS:

		Power Supply Option
	-ACA	Plug-in Power Converter with Battery Backup
	-CWB	Connector Wire for Hardwire Power Converter
		Power Supply Accessories (Sold Separately)
	-HW6	Hardwired Power Converter
	-MJ	Mini Junction Box
		Power Supply Option
	-CWB-1	Connector Wire for Hardwire Install (20 ft)

PRODUCT COMPLIANCE:

ADA
ASME A112.18.1/CSA B125.1
CEC
CSA B125.1
IPC
NSF 372
WaterSense

*Complies with ADA & ICC A117.1 accessibility requirements when installed according to the requirements outlined in these standards.

*This product should be used with a WaterSense labeled counterpart with a compatible flow volume to ensure that the entire system meets the requirements for water efficiency and performance.

*Although products with certain combinations of options and features will meet or comply with these standards and/or certifications, not every combination of options and features will result in such compliance. If you have any questions about your particular product, please contact our Customer Care Dept. at 1-855-ONE-ZURN (United States) or 1-877-892-5216 (Canada) for confirmation.

DOCUMENTATION LINKS:


Maintenance Use and Care - Care and Cleaning (pdf) - z6913-xl_z6915-xl_installation.pdf
Installation Guide - Installation Instruction (pdf) - Z6913-XL
Warranty - Warranty (pdf) - Z6913-XL

by Zurn Elkay Water Solutions
5000 Elwin Buchanan Drive, Sanford, NC 27330
3544 Nashua Drive, Mississauga, Ontario L4V1L2
ZURN.COM US 1.855.ONE.ZURN CANADA 1.877.892.5216
zurn.com/patents

© 2026

ROUGH-IN / INSTALLATION DRAWING

AquaSense Battery Powered Faucet

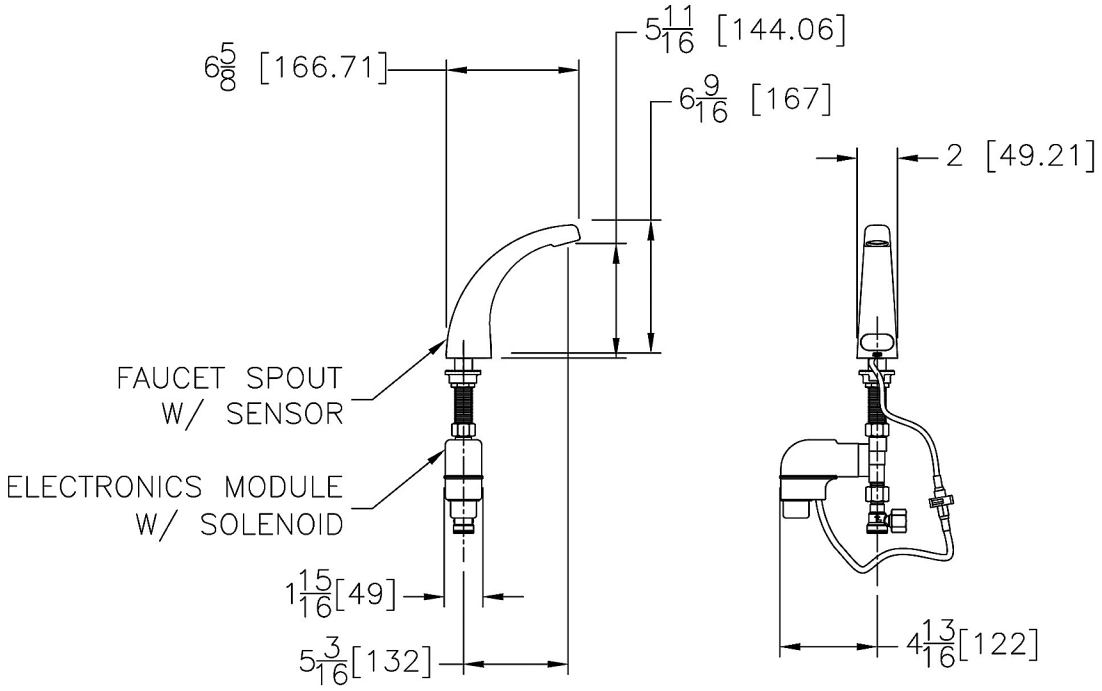

NOTE: Recommended through hole diameter to properly mount the spout/shank is 1-1/8" to 1-1/4".

by Zurn Elkay Water Solutions
5000 Elwin Buchanan Drive, Sanford, NC 27330
3544 Nashua Drive, Mississauga, Ontario L4V1L2
ZURN.COM US 1.855.ONE.ZURN CANADA 1.877.892.5216
zurn.com/patents

© 2026