


Data Sheet | Item Number: 210-112

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715;
"Hole width 25 mm; silver-colored

<https://www.wago.com/210-112>



Color:  silver-colored

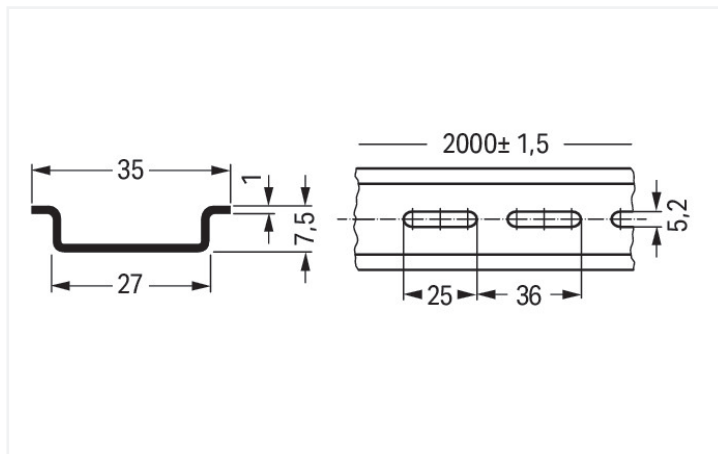

Dimensions in mm

Technical data

Main product function

Mounting accessories

Physical data

Width	2000 mm / 78.74 inches
Height	7.5 mm / 0.295 inches
Depth	35 mm / 1.378 inches

Material Data

Color	silver-colored
Fire load	0 MJ
Weight	630 g

Commercial data

Product Group	2 (Terminal Block Accessories)
eCl@ss 10.0	27-40-06-02
eCl@ss 9.0	27-40-06-02
ETIM 8.0	EC001285
ETIM 7.0	EC001285
PU (SPU)	10 (1) pcs
Packaging type	Box
Country of origin	IT
GTIN	4017332272292
Customs tariff number	72169180000

Downloads



Environmental Product Compliance

Compliance Search

Environmental Product
Compliance 210-112

Documentation

Bid Text

Item No.	Date	File Type	Size	Download
210-112	19.02.2019	xml	2.73 KB	
210-112	23.11.2018	docx	14.52 KB	

CAD/CAE-Data

CAD data

2D/3D Models 210-112



CAE data

EPLAN Data Portal
210-112WSCAD Universe
210-112

ZUKEN Portal 210-112



Installation Notes

DIN-Rail	Item No.	Current [A]	Acc. to mm ² /AWG Cu
DIN 35 x 7.5 (steel)			
slotted	210-112	76	16/6
unslotted	210-113	76	16/6
DIN 35 x 15 (steel)			
1.5 mm thick	210-114	125	35/2
2.3 mm thick	210-118	125	35/2
DIN 35 x 7.5 (Al)			
unslotted	210-196	76	16/6
DIN 35 x 15 (Cu)			
2.3 mm thick	210-198	309	150/6/0

Current applies to rails of 1 m/3'3" length

When using standard DIN-rails as ground conductor busbars, please refer to the maximum current capacities listed above. Steel DIN-rails are not suited for PEN (ground and N-conductor) applications per EN 60947-7-2 (VDE 0611, Part 3).