



DEWALT®

ANCHORS & FASTENERS

Mechanical Anchoring

FASTENAL®

CODE LISTED

ICC-ES ESR-3889

CRACKED & UNCRACKED CONCRETE

CODE LISTED

ICC-ES ESR-4042

GROUTED CONCRETE BLOCK

NEW

**APPROVED FOR GROUTED
CONCRETE BLOCK (CMU)**

no load reduction in bed joints

Screw-Bolt+™

ANCHORS & FASTENERS



ESR-3889

NEW



ESR-4042

Grout Filled CMU

NEW



City of Los Angeles



INTEGRATED WASHER

with serrations under the head secures the attachment




IDENTIFYING MARK

diameter, length and product marks embossed on head for easy identification

ENGINEERED STEEL

designed to cut through hard concrete and maintain ductility (bends before breaking)

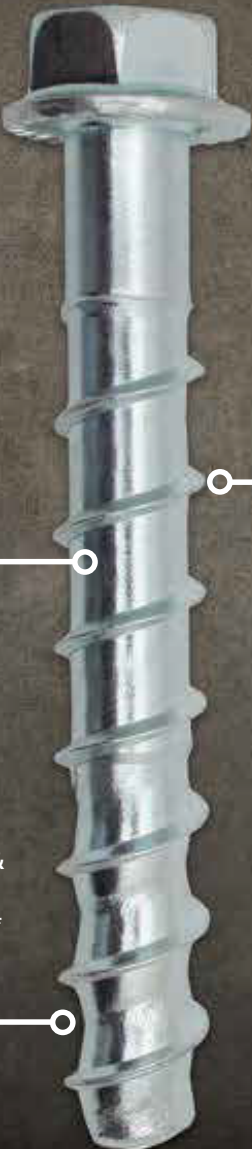

STANDARD BIT

designed for ANSI carbide drill bits

DUST RELIEF THREAD PROFILE

improves speed & reduces effort for faster installation*



Normal Weight Concrete

Light Weight Concrete

Concrete Over Steel Deck

Grouted Masonry

Brick



Fast Installation*

Screw-Bolt+™ vs wedge anchor, (5/8" diameters)

22%

Faster Installation

DeWALT Screw-Bolt+™

Wedge Anchor

*Compared to 5/8" Power-Stud+ SD1 Wedge-Anchor, 5" deep in low strength concrete

	DeWALT Screw-Bolt+™		Hilti® Kwik HUS-EZ*	Simp-son® Titen HD*	ITW Red Head® LDT*
ICC Approval	ESR-3889 Cracked & Uncracked Concrete	ESR-4042 Grouted Filled CMU	ESR-3027 Galvanized Not ICC Approved	ESR-2713 Galvanized Not ICC Approved	ESR-3699 5/8" & 3/4" Not ICC Approved
Coating	Zinc & Galvanized		Zinc	Zinc & Galvanized	Zinc & Evirex
ANSI Bit	Yes		Yes	Yes	Undersized Bit
Diameters	1/4"-3/4"		1/4"-3/4"	1/4"-3/4"	3/8"-3/4"
Matched Tool	DeWALT		Hilti Tools	No	No

*Hilti and Kwik HUS-EZ are registered trademarks of Hilti Corporation

*Simpson and Titen HD are registered trademarks of Simpson Strong-Tie Company, Inc.

*ITW and Redhead are registered trademarks of Illinois Tool Works, Inc.

Screw-Bolt+™ Concrete Screw Anchor

Typical Screw-Bolt+ Applications

Concrete Construction



Structural



Racking



Fence and Rail



Drywall



Glazing




Temporary Applications

Comprehensive Selection

A wide range of diameters and lengths (zinc & galvanized)

DIAMETERS

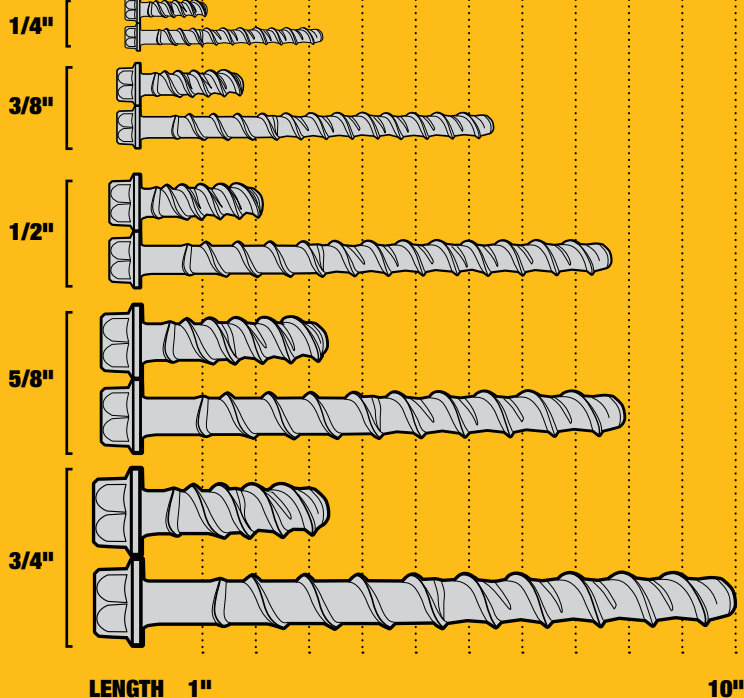

LENGTH 1"

10"



ZINC PLATED SCREW-BOLT+™



GALVANIZED SCREW-BOLT+™

CAT#									
ZINC PLATED	FASTENAL#	GALVANIZED	FASTENAL#	ANCHOR	LENGTH	HOLE SIZE	SOCKET SIZE	QTY	MSTR QTY
*PFM1411000	FASTENAL#			1/4" x 1-1/4"	1-1/4"	1/4"	7/16"	100	600
PFM1411020	FASTENAL#			1/4" x 1-3/4"	1-3/4"	1/4"	7/16"	100	600
PFM1411060	FASTENAL#			1/4" x 2-1/4"	2-1/4"	1/4"	7/16"	100	600
PFM1411080	FASTENAL#			1/4" x 2-5/8"	2-5/8"	1/4"	7/16"	100	500
PFM1411100	FASTENAL#			1/4" x 3"	3"	1/4"	7/16"	100	500
*PFM1411160	FASTENAL#			3/8" x 1-3/4"	1-3/4"	3/8"	9/16"	50	300
PFM1411220	FASTENAL#			3/8" x 2-1/2"	2-1/2"	3/8"	9/16"	50	300
PFM1411240	FASTENAL#	PFM1461240	FASTENAL#	3/8" x 3"	3"	3/8"	9/16"	50	250
PFM1411280	FASTENAL#	PFM1461280	FASTENAL#	3/8" x 4"	4"	3/8"	9/16"	50	250
PFM1411300	FASTENAL#	PFM1461300	FASTENAL#	3/8" x 5"	5"	3/8"	9/16"	50	250
PFM1411320	FASTENAL#	PFM1461320	FASTENAL#	3/8" x 6"	6"	3/8"	9/16"	50	150
*PFM1411340	FASTENAL#			1/2" x 2"	2"	1/2"	3/4"	50	200
PFM1411360	FASTENAL#			1/2" x 2-1/2"	2-1/2"	1/2"	3/4"	50	200
PFM1411380	FASTENAL#			1/2" x 3"	3"	1/2"	3/4"	50	150
PFM1411420	FASTENAL#	PFM1461420	FASTENAL#	1/2" x 4"	4"	1/2"	3/4"	50	150
PFM1411460	FASTENAL#	PFM1461460	FASTENAL#	1/2" x 5"	5"	1/2"	3/4"	25	100
PFM1411480	FASTENAL#	PFM1461480	FASTENAL#	1/2" x 6"	6"	1/2"	3/4"	25	75
PFM1411520	FASTENAL#	PFM1461520	FASTENAL#	1/2" x 8"	8"	1/2"	3/4"	25	150
*PFM1411540	FASTENAL#			5/8" x 3"	3"	5/8"	15/16"	25	100
PFM1411580	FASTENAL#			5/8" x 4"	4"	5/8"	15/16"	25	100
PFM1411600	FASTENAL#	PFM1461600	FASTENAL#	5/8" x 5"	5"	5/8"	15/16"	25	75
PFM1411640	FASTENAL#	PFM1461640	FASTENAL#	5/8" x 6"	6"	5/8"	15/16"	25	75
PFM1411680	FASTENAL#	PFM1461680	FASTENAL#	5/8" x 8"	8"	5/8"	15/16"	25	50
*PFM1411700	FASTENAL#			3/4" x 3"	3"	3/4"	1-1/8"	20	60
*PFM1411720	FASTENAL#			3/4" x 4"	4"	3/4"	1-1/8"	20	60
PFM1411760	FASTENAL#			3/4" x 5"	5"	3/4"	1-1/8"	20	60
PFM1411800	FASTENAL#	PFM1461800	FASTENAL#	3/4" x 6"	6"	3/4"	1-1/8"	20	60
PFM1411840	FASTENAL#	PFM1461850	FASTENAL#	3/4" x 8"	8"	3/4"	1-1/8"	20	40
PFM1411880	FASTENAL#			3/4" x 10"	10"	3/4"	1-1/8"	20	20

* denotes sizes which are less than the minimum standard anchor length for Strength Design. The published size length of the anchor is measured from under the head.

AVAILABLE IN MECHANICALLY GALVANIZED ZINC
approved for pressure treated lumber

Concrete Screw Anchor System



20V MAX** SDS PLUS ROTARY HAMMER

DCH273P2DH 1" L-Shape	FASTENAL# 2164747	DCH133M2 1" D-Handle	FASTENAL# 2164746	DCH293R2 1-1/8" L-Shape w/E-Clutch	FASTENAL# 2164749
--------------------------	----------------------	-------------------------	----------------------	--	----------------------

FLEXVOLT® SDS MAX

DCH481X2 1-9/16"	FASTENAL# 2144079
---------------------	----------------------

20V MAX** IMPACT WRENCHES

DCF890M2 3/8" Impact Wrench	FASTENAL# 2164759	DCF894P2 1/2" Impact Wrench	FASTENAL# 91197177	DCF899P2 High Torque 1/2" (Speed #2)	FASTENAL#
-----------------------------------	----------------------	-----------------------------------	-----------------------	--	-----------

CARBIDE BITS



IMPACT RATED SOCKETS



DW5517	FASTENAL#	DW5417	FASTENAL#	DW5417	FASTENAL#
DW5517	FASTENAL#	DW5417	FASTENAL#	DW5417	FASTENAL#
DW5517	FASTENAL#	DW5417	FASTENAL#	DW5417	FASTENAL#
DW5517	FASTENAL#	DW5417	FASTENAL#	DW5417	FASTENAL#
DW5517	FASTENAL#	DW5417	FASTENAL#	DW5417	FASTENAL#

DWMT74479B	FASTENAL#
DWMT74479B	FASTENAL#
DWMT74479B	FASTENAL#
DWMT74479B	FASTENAL#
DWMT74479B	FASTENAL#

DW5527	FASTENAL#	DW5427	FASTENAL#	DW5427	FASTENAL#
DW5527	FASTENAL#	DW5427	FASTENAL#	DW5427	FASTENAL#
DW5527	FASTENAL#	DW5427	FASTENAL#	DW5427	FASTENAL#
DW5527	FASTENAL#	DW5427	FASTENAL#	DW5427	FASTENAL#
DW5529	FASTENAL#	DW5429	FASTENAL#	DW5429	FASTENAL#
DW5529	FASTENAL#	DW5429	FASTENAL#	DW5429	FASTENAL#

DWMT75122B	FASTENAL#
DWMT75122B	FASTENAL#
DWMT75122B	FASTENAL#
DWMT75122B	FASTENAL#
DWMT75122B	FASTENAL#
DWMT75122B	FASTENAL#

DW5537	FASTENAL#	DW5437	FASTENAL#	DW5437	FASTENAL#
DW5537	FASTENAL#	DW5437	FASTENAL#	DW5437	FASTENAL#
DW5537	FASTENAL#	DW5437	FASTENAL#	DW5437	FASTENAL#
DW5537	FASTENAL#	DW5437	FASTENAL#	DW5437	FASTENAL#
DW5538	FASTENAL#	DW5438	FASTENAL#	DW5438	FASTENAL#
DW5538	FASTENAL#	DW5438	FASTENAL#	DW5438	FASTENAL#
DW5538	FASTENAL#	DW5438	FASTENAL#	DW5438	FASTENAL#

DWMT75113B	FASTENAL#
DWMT75113B	FASTENAL#
DWMT75113B	FASTENAL#
DWMT75113B	FASTENAL#
DWMT75113B	FASTENAL#
DWMT75113B	FASTENAL#
DWMT75113B	FASTENAL#

DW5471	FASTENAL#	DW5446	FASTENAL#	DW5471	FASTENAL#	DW5806	FASTENAL#
DW5471	FASTENAL#	DW5446	FASTENAL#	DW5471	FASTENAL#	DW5806	FASTENAL#
DW5471	FASTENAL#	DW5446	FASTENAL#	DW5471	FASTENAL#	DW5806	FASTENAL#
DW5471	FASTENAL#	DW5446	FASTENAL#	DW5471	FASTENAL#	DW5806	FASTENAL#
DW5471	FASTENAL#	DW5447	FASTENAL#	DW5471	FASTENAL#	DW5806	FASTENAL#

DWMT75104B	FASTENAL#
DWMT75104B	FASTENAL#
DWMT75104B	FASTENAL#
DWMT75104B	FASTENAL#
DWMT75104B	FASTENAL#

DW5474	FASTENAL#	DW5453	FASTENAL#	DW5474	FASTENAL#	DW5810	FASTENAL#
DW5474	FASTENAL#	DW5453	FASTENAL#	DW5474	FASTENAL#	DW5810	FASTENAL#
DW5474	FASTENAL#	DW5453	FASTENAL#	DW5474	FASTENAL#	DW5810	FASTENAL#
DW5474	FASTENAL#	DW5453	FASTENAL#	DW5474	FASTENAL#	DW5810	FASTENAL#
DW5474	FASTENAL#	DW5455	FASTENAL#	DW5474	FASTENAL#	DW5810	FASTENAL#
DW5475	FASTENAL#	DW5455	FASTENAL#	DW5475	FASTENAL#	DW5812	FASTENAL#

DWMT75125B	FASTENAL#
DWMT75125B	FASTENAL#
DWMT75125B	FASTENAL#
DWMT75125B	FASTENAL#
DWMT75125B	FASTENAL#
DWMT75125B	FASTENAL#

Maximum Optimum — (Not Recommended) ** Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18.

FASTENAL®

DEWALT®

ANCHORS & FASTENERS

FASTENAL®

Screw-Bolt+™ Concrete Screw Anchor

WE ARE WHERE YOU NEED US



15 DEWALT Service Centers



5 Regional Repair Hubs



2-Day or less UPS ground shipping
to your Regional Repair Hub



Day or Less
Tool Repair

Dealer Stamp

1-800-4 DEWALT®

www.DEWALT.com

Copyright © 2020 DEWALT. The yellow/black color scheme is a trademark for DEWALT power tools, accessories, anchors & concrete adhesives.