

# DEWALT®

## ANCHORS & FASTENERS

# FASTENAL®

# DUST X+™

## ANCHOR INSTALLATION SYSTEM

### ADHESIVE ANCHORS

A TESTED ANCHOR INSTALLATION SYSTEM BY DEWALT THAT IS OSHA TABLE 1 COMPLIANT AND ICC-ES APPROVED

## DRILL + EXTRACT + ANCHOR




PFC1271050  
0237274

08310SD  
2141223

08600  
2141226




### DustX+ Anchor Installation System

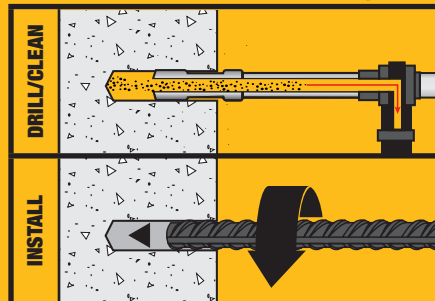

# VS

### Traditional Cleaning Method

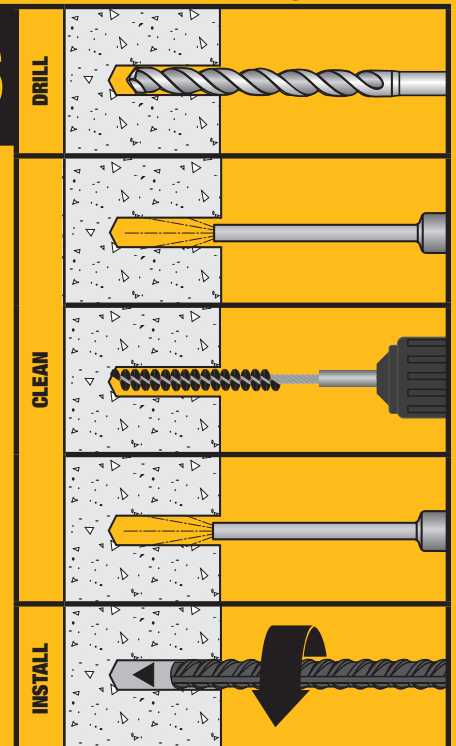

## ELIMINATE 100% OF TRADITIONAL HOLE CLEANING STEPS WITH DUST X+\*

\*These claims are abbreviated instructions which may vary by application. Review and follow the instructions accompanying the product or refer to the product technical manual located at [anchors.DEWALT.com](http://anchors.DEWALT.com)

**OSHA COMPLIANT**  
1926.1153

**ICC  
ES**



## ANCHORS & FASTENERS



### Hollow Drill Bits

#### SDS+ HOLLOW DRILL BITS

CAT #	FASTENAL #	DIA	USABLE LENGTH	OVERALL LENGTH
DWA54038	-	3/8"	9-3/4"	14-1/2"
DWA54012	2144071	1/2"	9-3/4"	14-1/2"
DWA54916	2144072	9/16"	9-3/4"	14-1/2"
DWA54058	2144073	5/8"	9-3/4"	14-1/2"
DWA54034	2144074	3/4"	9-3/4"	14-1/2"

#### SDS MAX HOLLOW DRILL BITS

CAT #	FASTENAL #	DIA	USABLE LENGTH	OVERALL LENGTH
DWA58058	2144066	5/8"	15-3/4"	23-5/8"
DWA58034	2144067	3/4"	15-3/4"	23-5/8"
DWA58078	2144068	7/8"	15-3/4"	23-5/8"
DWA58001	2144069	1"	15-3/4"	23-5/8"
DWA58118	2144070	1-1/8"	15-3/4"	23-5/8"
DWA58958	-	5/8"	39-3/8"	47-1/4"
DWA58934	-	3/4"	39-3/8"	47-1/4"
DWA58978	-	7/8"	39-3/8"	47-1/4"
DWA58901	-	1"	39-3/8"	47-1/4"
DWA58918	-	1-1/8"	39-3/8"	47-1/4"
DWA58114	-	1-1/4"	39-3/8"	47-1/4"
DWA58138	-	1-3/8"	39-3/8"	47-1/4"
DWA58112	-	1-1/2"	39-3/8"	47-1/4"

### Dust Extractor

#### DWV012

CAT #	DIA
DWV012	10 Gallon HEPA/RRP
0229761	Wet/Dry Dust Extractor with Automatic Filter Clean
	Amps: 15 Amps Max CFM: 155 CFM

Kit Includes:

DWV9330	(2) HEPA Filters
2144062	
DWV9316	(1) Anti-Static Hose
-	
DWV9402	(1) Fleece Bag
2144065	



**Y-CUTTER CARBIDE TIP:**  
EXACT POSITIONING,  
MAXIMUM DURABILITY

**DUST REMOVED  
THROUGH  
BIT HOLLOW**



### RECOMMENDED HAMMER SELECTION BY BIT DIAMETER\*

BIT DIA	SDS + HAMMERS							SDS MAX HAMMERS			
	D25133K	DCH133	D25262K	D25263K / DCH263	DCH293	D25333K	D25416K	D25481K / DCH481	D25604K	D25733K / DCH733	D25773K / DCH773
3/8"	✓	✓	✓	✓	✓	✓	✓	×	×	×	×
1/2"	✓	✓	✓	✓	✓	✓	✓	✓	×	×	×
5/8"	✓	✓	✓	✓	✓	✓	✓	✓	✓	×	×
3/4"	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	×
7/8"	×	×	×	✓	✓	✓	✓	✓	✓	✓	✓
1"	×	×	×	✓	✓	✓	✓	✓	✓	✓	✓
1-1/8"	×	×	×	×	×	×	✓	✓	✓	✓	✓
1-1/4"	×	×	×	×	×	×	×	✓	✓	✓	✓
1-3/8"	×	×	×	×	×	×	×	✓	✓	✓	✓
1-1/2"	×	×	×	×	×	×	×	×	✓	✓	✓

✓ OPTIMUM

✓ MAXIMUM

× NOT RECOMMENDED

\* "Based on 15-3/4" of embedment. For deeper holes go up in hammer size."

Copyright ©2020 DeWALT. The following are trademarks for one or more DeWALT power tools, accessories, anchors and concrete adhesives: The yellow and black color scheme; the "D"-shaped air intake grill; the array of pyramids on the handgrip; the kit box configuration; and the array of lozenge-shaped humps on the surface of the tool.