


DEWALT®

ANCHORS & FASTENERS


FASTENAL®

DUST X+™

ANCHOR INSTALLATION SYSTEM

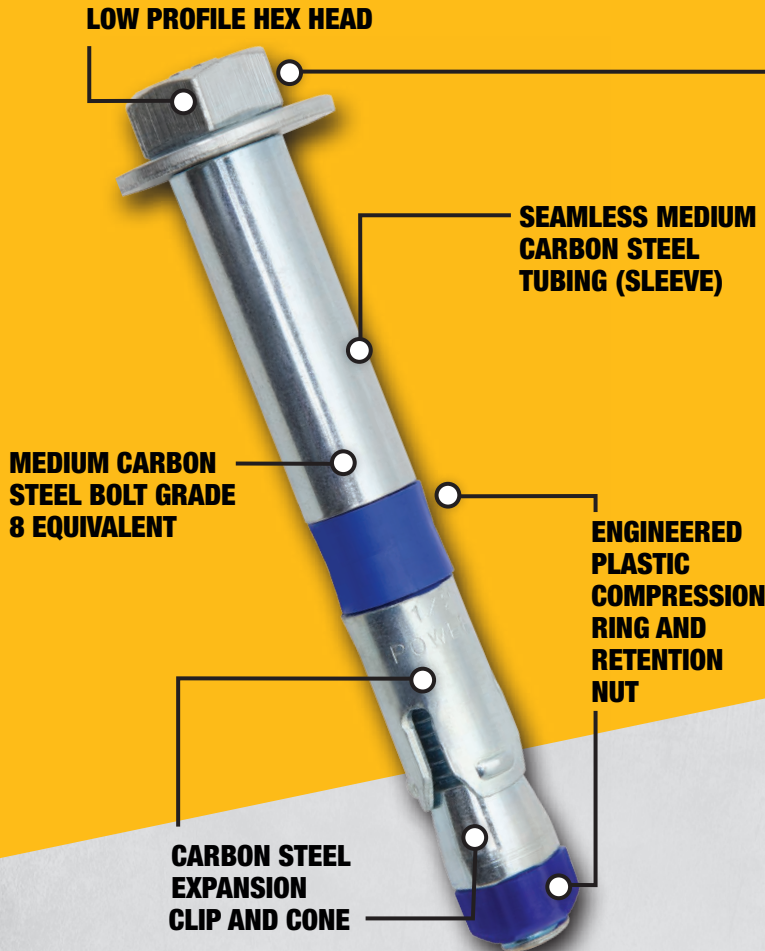

TOP VIEW

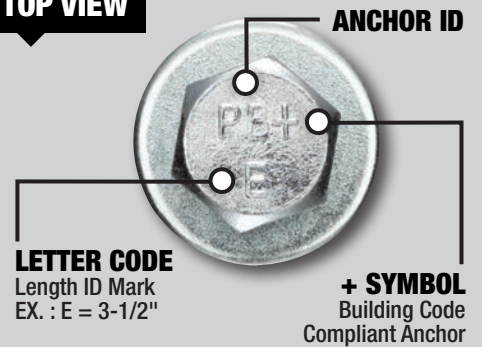

TYPICAL APPLICATIONS

- Structural connections, like beam and column anchorage
- Safety-related attachments and tension zone applications
- Interior applications / low level corrosion environment
- Heavy duty applications

APPROVALS



ESR-3260
Concrete
(1/2"-3/4"
diameters)



2015
2012
2009



Recognition in cracked
and uncracked concrete including
seismic and wind loading
(Category 1 Anchors)

BASE MATERIALS



Normal
Weight
Concrete



Lightweight
Concrete

HEAVY DUTY SLEEVE ANCHOR

Power-Bolt®+

DeWALT

FASTENAL

ANCHORS & FASTENERS

POWER-BOLT®+

CAT#	FASTENAL#	ANCHOR SIZE	MAX FIXTURE THICK.	CTN	MSTR
6902SD-PWR	0563400	1/4" x 1-3/4"	1/2"	100	600
6906SD-PWR	0563401	1/4" x 3"	1-3/4"	100	600
6911SD-PWR	-	3/8" x 1-7/8"	1/4"	50	300
6910SD-PWR	0563402	3/8" x 2-1/4"	1/4"	50	300
6913SD-PWR	-	3/8" X 3-1/2"	1"	50	300
6914SD-PWR	0563404	3/8" X 3-1/2"	1-1/2"	50	300
6916SD-PWR	0563405	3/8" X 4"	2"	50	300
6930SD-PWR*	0563406	1/2" X 2-3/4"	1/4"	50	200
6932SD-PWR	0563407	1/2" X 3-1/2"	1/4"	50	200
6934SD-PWR	0563408	1/2" X 4-3/4"	1-1/2"	25	150
6936SD-PWR	0563409	1/2" X 5-3/4"	2-1/2"	25	150
6940SD-PWR*	0563410	5/8" X 3"	1/4"	20	120
6942SD-PWR	0563411	5/8" X 4"	1/4"	15	90
6944SD-PWR	0563412	5/8" X 5"	1-1/4"	15	90
6945SD-PWR	0563413	5/8" X 6"	2-1/4"	15	90
6947SD-PWR	0563414	5/8" 8-1/2"	4-3/4"	10	40
6950SD-PWR	0563415	3/4" X 3-1/2"	1/4"	15	90
6952SD-PWR	0563416	3/4" X 4-1/4"	1-1/4"	10	60
6954SD-PWR	0563417	3/4" X 5-1/4"	2-1/4"	10	60
6956SD-PWR	0563418	3/4" X 7-1/4"	4-1/4"	10	40
6957SD-PWR	0563419	3/4" X 8-1/4"	3-7/8"	10	40

* Less than the minimum standard anchor length for Strength Design or not included in ESR-3260.
Published size includes the diameter and the length which is measured from below the washer to the end of the anchor.




➤ Structural column connection



UPGRADE FROM TRADITIONAL HOLE CLEANING



STRUCTURAL DESIGN SOFTWARE FOR ANCHORING TO CONCRETE



Download
DDA™ and
experience our
free concrete
anchoring
design software.

DeWALT.COM/DDA

RELATED PRODUCTS



DCH293R2DH 2191718
20V MAX* XR® SDS PLUS
ROTARY HAMMER W/DUST
COLLECTION



DCH273P2DHO 2132255
20V MAX* XR® SDS PLUS ROTARY
HAMMER W/ON-BOARD DUST
EXTRACTOR



DWH050K 0266511
LARGE HAMMER DUST
EXTRACTION - HOLE CLEANING



DWV012 0229761
10-GALLON HEPA/RRP
WET/DRY DUST EXTRACTOR



HOLLOW DRILL BIT
SDS PLUS AND
SDS MAX CARBIDE

For 20V MAX Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18.

1-800-4-DeWALT

www.DeWALT.com

Copyright ©2020 DeWALT. The following are trademarks for one or more DeWALT power tools, accessories, anchors and concrete adhesives: The yellow and black color scheme; the "D"-shaped air intake grill; the array of pyramids on the handgrip; the kit box configuration; and the array of lozenge-shaped humps on the surface of the tool.