

DEWALT®

HOLLOW BIT™

SDS MAX Y-CUTTER CARBIDE

For positioning
and hole starting



HOLLOW BITS

	DIAMETER	OVERALL LENGTH	USABLE LENGTH
SDS plus®	DWA54012	1/2"	14-1/2"
	DWA54916	9/16"	14-1/2"
	DWA54058	5/8"	14-1/2"
	DWA54034	3/4"	14-1/2"
SDS max	DWA58058	5/8"	23-3/4"
	DWA58034	3/4"	23-3/4"
	DWA58078	7/8"	23-3/4"
	DWA58001	1"	23-3/4"
	DWA58118	1-1/8"	23-3/4"

USE WITH DWV012 For OSHA silica dust Table 1 Compliance

* System is compliant to the Exposure Control Methods described in Table 1 of 29 CFR 1926.1153 when outlined components are operating and maintained in accordance to manufacturer's instructions.



HOLLOW DRILL BIT

Bit extracts
while drilling
for less dust,
fast holes

AIRLOCK™ ADAPTER

Connects directly
to DEWALT's
Airlock System
forming a secure,
locking connection
between bit and
dust extractor

SDS MAX AND
SDS PLUS
Sizes available



Airlock™ Adapter allows
for quick, easy and durable
connection between 1-1/4"
vacuum hose and various
DEWALT tools and shrouds.



DEWALT®



DCB1800M3T1




08351SD



DWV012

DUST X+™ ANCHOR INSTALLATION SYSTEM

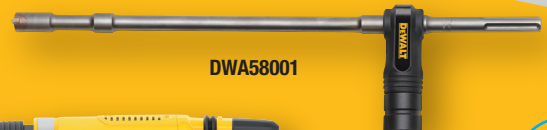

DWA58001



DCH481

DWAHOLLOWSS