

MODEL 600WP SPECIFICATIONS


ELECTRICAL SPECIFICATIONS

SUPPLY VOLTAGE: 12 OR 24 VOLTS DC
CURRENT DRAW: 440 MA. @ 12 VDC, 260 MA. @ 24 VDC

MECHNICAL SPECIFICATIONS

HOLDING FORCE: 600 POUNDS MINIMUM
HOUSING: STAINLESS STEEL


WIRING DIAGRAM

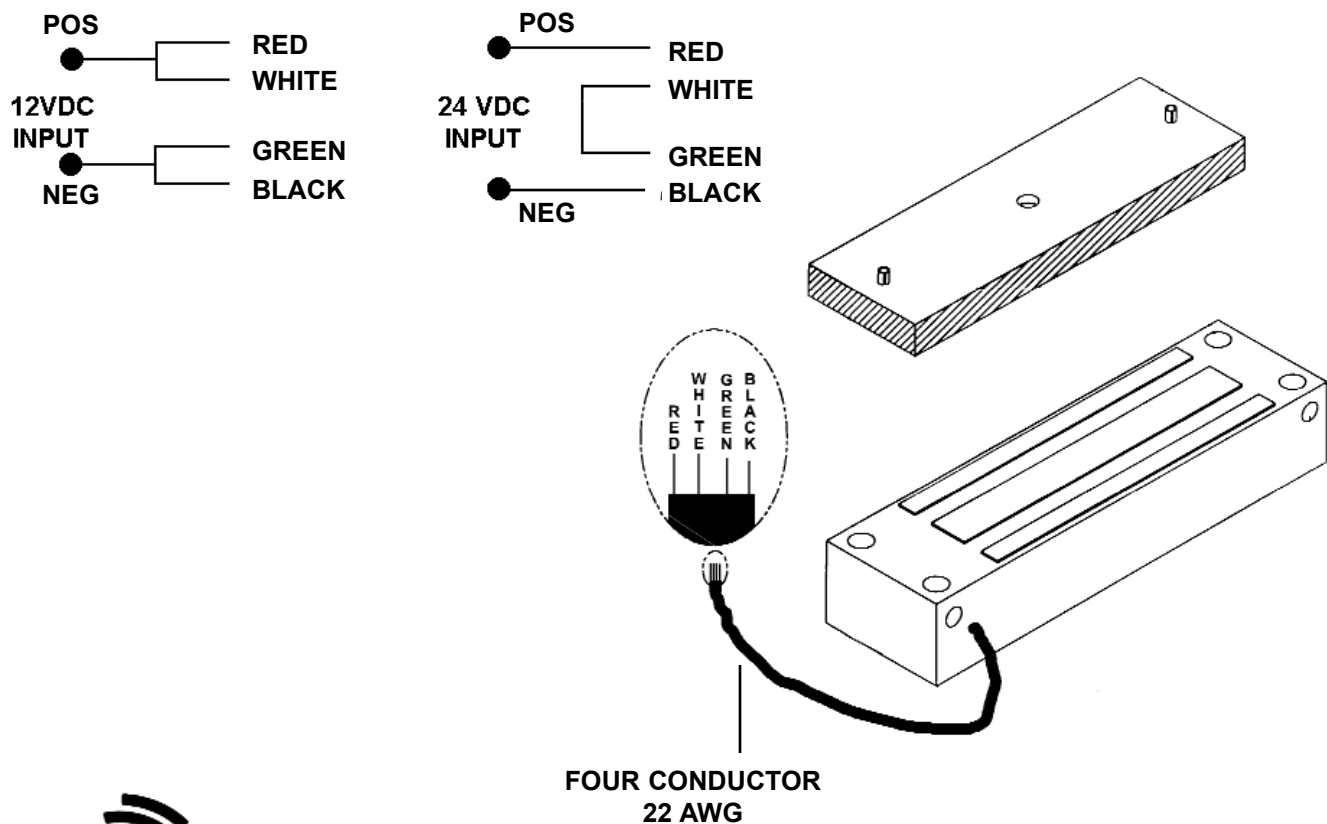

ALARM CONTROLS CORPORATION

19 BRANDYWINE DRIVE P.O. BOX 280
DEER PARK, NY 11729
1 800 645-5538

MODEL 600WP INSTALLATION TEMPLATE

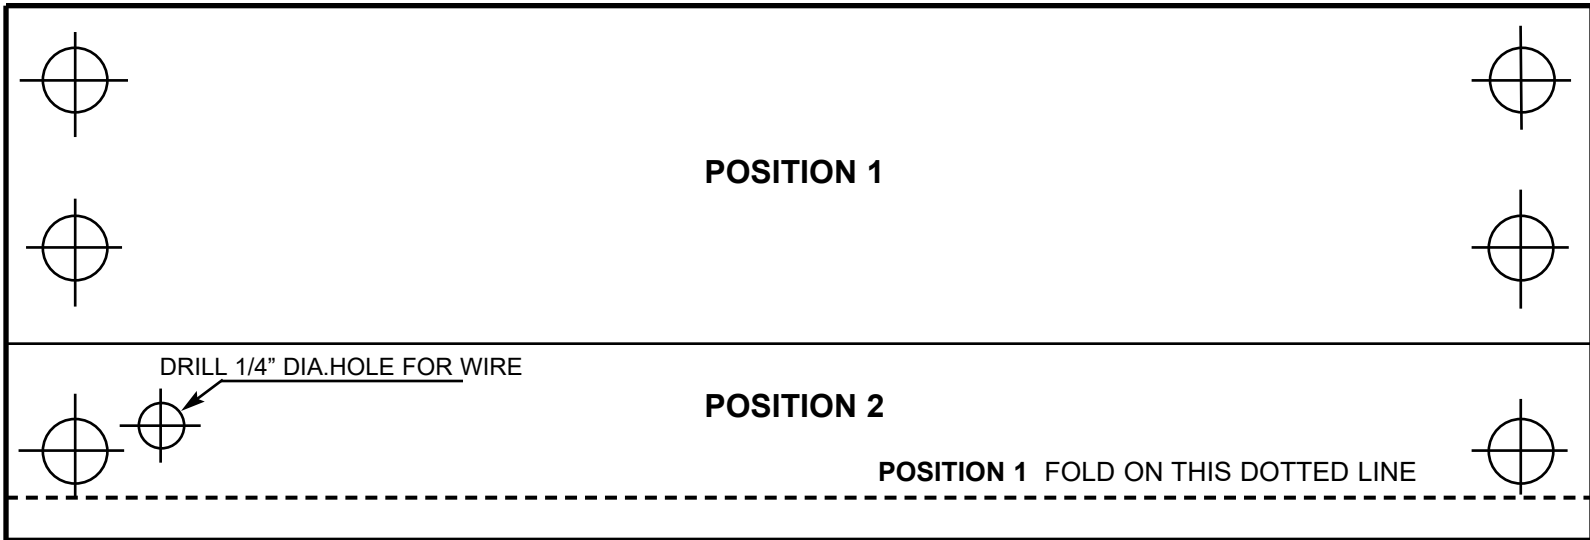

POSITION 2 FOLD ON THIS DOTTED LINE



ALARM CONTROLS CORPORATION
DEER PARK, NEW YORK 11729


GATE LOCK INSTALLATION EXAMPLES

USE AM3370 BRACKET FOR MODEL 600WP


USE AM6370 BRACKET FOR MODEL 1200WP

CONSULT FACTORY FOR CUSTOM BRACKETS

TYPICAL SLIDING GATE
INSTALLATION

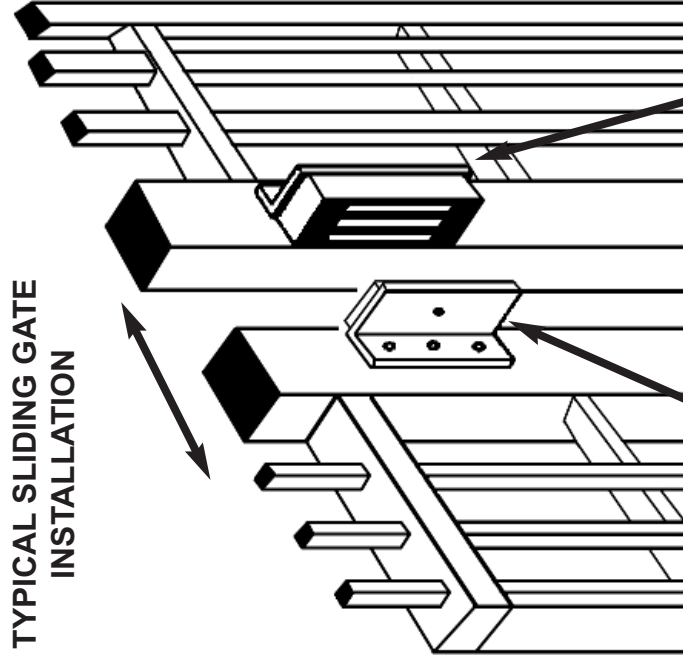

TYPICAL SWINGING GATE
INSTALLATION

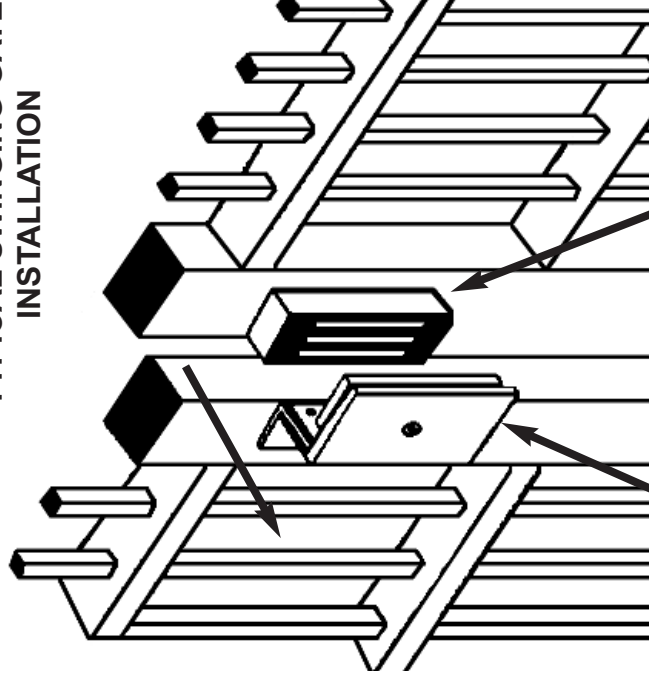

ANGLE BRACKET
ATTACHES
ARMATURE TO
MOVING SECTION
OF GATE

ANGLE BRACKET
ATTACHES
MAGNET TO
STATIONARY
SECTION
OF GATE

ADJUSTABLE
Z BRACKET
ATTACHES
ARMATURE TO
MOVING SECTION
OF GATE

MAGNET
MOUNTS ON
STATIONARY
SECTION
OF GATE



ALARM CONTROLS CORPORATION

19 BRANDYWINE DRIVE P.O. BOX 280
DEER PARK, NY 11729
1 800 645-5538