


INSTALLATION INSTRUCTIONS
MODELS TS-2-2, TS-3-2, TS-4-2, TS-5-2
UL FILE SA32686 CONFORMS TO UL STANDARD 294 FOR ACCESS CONTROL

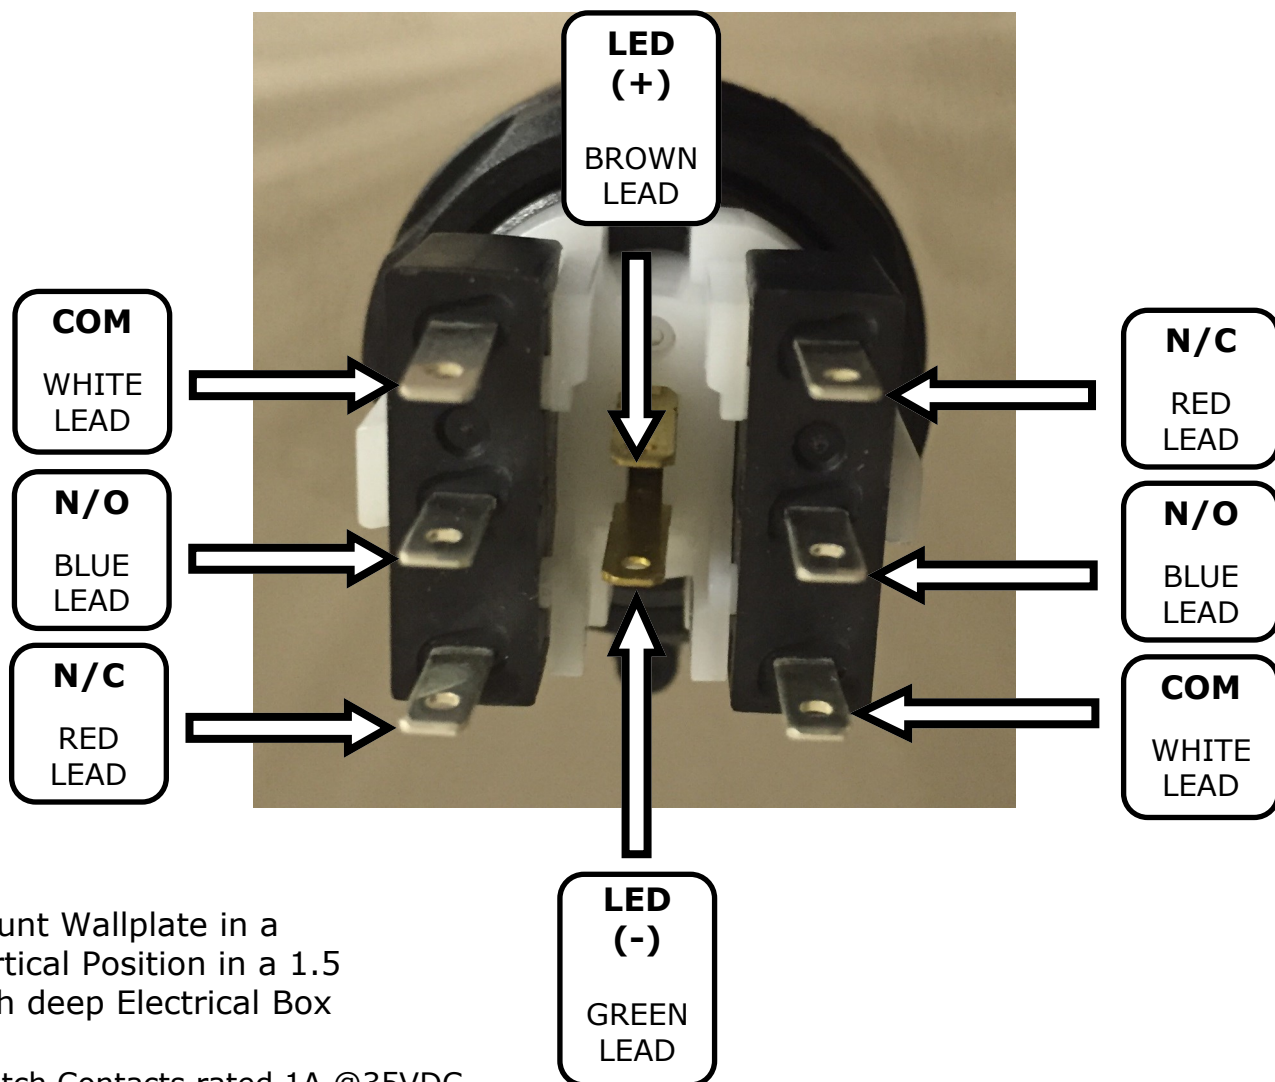

Mount Wallplate in a
Vertical Position in a 1.5
inch deep Electrical Box

Switch Contacts rated 1A @35VDC

Pushbutton Illumination LED operates on 12 to 24 VDC

Pushbutton Illumination LED Current Draw -

4mA @12VDC

15mA @ 24VDC

TS-3-2, TS-5-2 PLATE LED WIRING

Colored Lead	Designation	Notes
Red	+24V Positive Input Power Lead	LED Current Draw - 12 VDC @ 9mA 24 VDC @ 19mA
White	+12V Positive Input Power Lead	
Black	Negative Input Power Lead	



Alarm Controls
Phoenix, AZ 85044
(800) 645-5538
www.alarmcontrols.com

ASSA ABLOY, the global leader
in door opening solutions

Doc D-010 Rev. A